Exhibit E

US010880721B2

(12) **United States Patent**
Björsell et al.

(10) **Patent No.: US 10,880,721 B2**
(45) **Date of Patent: Dec. 29, 2020**

(54) **MOBILE GATEWAY**

(71) Applicant: **VOIP-PAL.COM, INC.**, Bellevue, WA (US)

(72) Inventors: **Johan Emil Viktor Björsell**, Vancouver (CA); **Maksym Sobolyev**, Westminster (CA); **Pentti Kalevi Huttunen**, Vancouver (CA); **Emil Malak**, Vancouver (CA)

(73) Assignee: **VoIP-Pal.com, Inc.**, Bellevue, WA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 504 days.

(21) Appl. No.: **14/035,806**

(22) Filed: **Sep. 24, 2013**

(65) **Prior Publication Data**

US 2014/0024367 A1 Jan. 23, 2014

Related U.S. Application Data

(63) Continuation of application No. 13/056,277, filed as application No. PCT/CA2009/001062 on Jul. 28, 2009, now Pat. No. 8,630,234.
(Continued)

(51) **Int. Cl.**
H04W 8/02 (2009.01)
H04W 76/11 (2018.01)
H04W 76/15 (2018.01)

(52) **U.S. Cl.**
CPC ***H04W 8/02*** (2013.01); ***H04W 76/11*** (2018.02); *H04W 76/15* (2018.02)

(58) **Field of Classification Search**
CPC H04W 76/021; H04W 76/025; H04W 8/02
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,661,974 A 4/1987 Bales et al.
4,747,124 A 5/1988 Ladd
(Continued)

FOREIGN PATENT DOCUMENTS

BR PI 0718312-7 A2 11/2013
BR PI 0719682-2 A2 1/2014
(Continued)

OTHER PUBLICATIONS

ETSI TS 122 173 V12.7.0 (Oct. 2014) Digital cellular telecommunications system (Phase 2+); Technical Specification 8.2.2.3—Interoperability with PSTN/ISDN and mobile CS Networks, Contents and Forward, pp. 1-9; Sec. 8, pp. 14-17.
(Continued)

Primary Examiner — Andrew Lai
Assistant Examiner — M Mostazir Rahman
(74) *Attorney, Agent, or Firm* — Thorpe North & Western, LLP.

(57) **ABSTRACT**

A method of initiating a call to a callee using a mobile telephone involves: receiving, from a user of the mobile telephone, a callee identifier associated with the callee; transmitting an access code request message to an access server, the access code request message including the callee identifier; receiving an access code reply message from the access server in response to the access code request message, the access code reply message including an access code different from the callee identifier and associated with the callee identifier; and initiating a call with the mobile telephone using the access code to identify the callee.

141 Claims, 17 Drawing Sheets

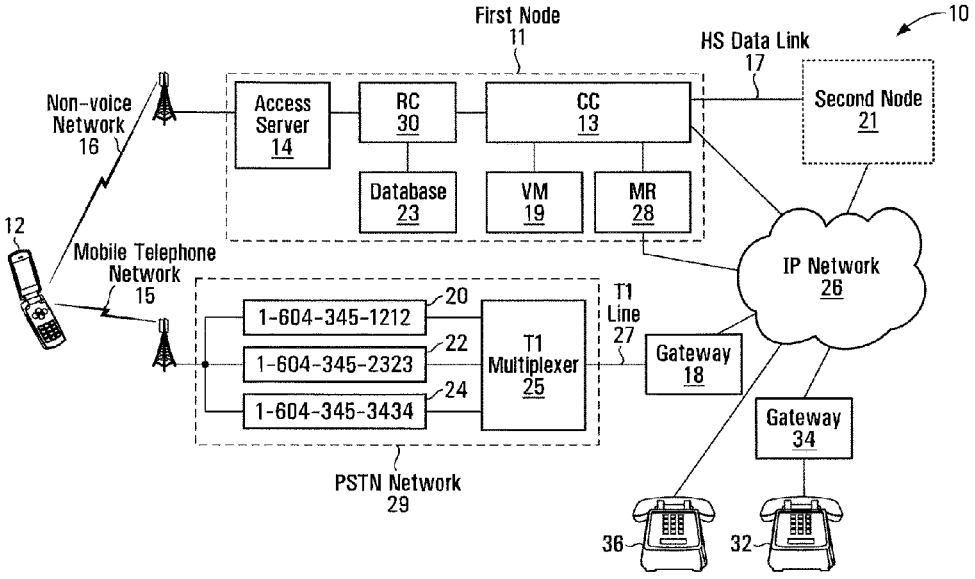

Related U.S. Application Data

(60) Provisional application No. 61/129,898, filed on Jul. 28, 2008.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,799,255 A 1/1989 Billinger et al.
4,916,491 A 4/1990 Katoh
4,992,971 A 2/1991 Hayashi
5,146,491 A 9/1992 Silver et al.
5,247,571 A 9/1993 Kay et al.
5,303,297 A 4/1994 Hillis
5,325,421 A 6/1994 Hou et al.
5,359,642 A 10/1994 Castro
5,425,085 A 6/1995 Weinberger et al.
5,440,621 A 8/1995 Castro
5,454,030 A 9/1995 de Oliveira et al.
5,469,497 A 11/1995 Pierce et al.
5,506,893 A 4/1996 Buscher et al.
5,519,769 A 5/1996 Weinberger et al.
5,559,871 A 9/1996 Smith
5,572,583 A 11/1996 Wheeler, Jr. et al.
5,590,133 A 12/1996 Billstrom et al.
5,602,907 A 2/1997 Hata et al.
5,608,786 A 3/1997 Gordon
5,621,787 A 4/1997 McKoy et al.
5,633,913 A 5/1997 Talarmo
5,661,790 A 8/1997 Hsu
5,677,955 A 10/1997 Doggett et al.
5,712,907 A 1/1998 Wegner et al.
5,719,926 A 2/1998 Hill
5,722,067 A 2/1998 Fougnies et al.
5,724,355 A 3/1998 Bruno et al.
5,726,984 A 3/1998 Kubler et al.
5,737,414 A 4/1998 Walker et al.
5,742,596 A 4/1998 Baratz et al.
5,751,961 A 5/1998 Smyk
5,768,521 A 6/1998 Dedrick
5,778,187 A 7/1998 Monteiro et al.
5,793,762 A 8/1998 Penners et al.
5,799,072 A 8/1998 Vulcan et al.
5,802,502 A 9/1998 Gell et al.
5,825,863 A 10/1998 Walker
5,828,740 A 10/1998 Khuc et al.
5,838,682 A 11/1998 Dekelbaum et al.
5,845,267 A 12/1998 Ronen
5,850,433 A 12/1998 Rondeau
5,864,610 A 1/1999 Ronen
5,867,495 A 2/1999 Elliott et al.
5,875,240 A 2/1999 Silverman
5,883,810 A 3/1999 Franklin et al.
5,883,891 A 3/1999 Williams et al.
5,889,774 A 3/1999 Mirashrafi et al.
5,905,736 A 5/1999 Ronen et al.
5,907,547 A 5/1999 Foladare et al.
5,910,946 A 6/1999 Csapo
5,915,005 A 6/1999 He
5,915,093 A 6/1999 Berlin et al.
5,917,899 A 6/1999 Moss et al.
5,923,659 A 7/1999 Curry et al.
5,930,343 A 7/1999 Vasquez
5,937,045 A 8/1999 Yaoya et al.
5,937,053 A 8/1999 Lee et al.
5,940,598 A 8/1999 Strauss et al.
5,953,504 A 9/1999 Sokal et al.
5,956,391 A 9/1999 Melen et al.
5,970,477 A 10/1999 Roden
5,974,043 A 10/1999 Solomon
5,991,291 A 11/1999 Asai et al.
5,991,378 A 11/1999 Apel
6,005,870 A 12/1999 Leung et al.
6,005,926 A 12/1999 Mashinsky
6,014,379 A 1/2000 White et al.
6,021,126 A 2/2000 White et al.
6,029,062 A 2/2000 Hanson
6,036,090 A 3/2000 Rahman et al.
6,052,445 A 4/2000 Bashoura et al.
6,058,300 A 5/2000 Hanson
6,069,890 A 5/2000 White et al.
6,073,013 A 6/2000 Agre et al.
6,073,142 A 6/2000 Geiger et al.
6,078,647 A 6/2000 D'Eletto
6,104,704 A 8/2000 Buhler et al.
6,104,711 A 8/2000 Voit
6,115,737 A 9/2000 Ely et al.
6,122,357 A 9/2000 Farris et al.
6,128,304 A 10/2000 Gardell et al.
6,137,869 A 10/2000 Voit et al.
6,141,404 A 10/2000 Westerlage et al.
6,151,385 A 11/2000 Reich et al.
6,173,272 B1 1/2001 Thomas et al.
6,185,414 B1 2/2001 Brunner et al.
6,185,565 B1 2/2001 Meubus et al.
6,188,752 B1 2/2001 Lesley
6,192,123 B1 2/2001 Grunsted et al.
6,205,135 B1 3/2001 Chinni et al.
6,236,851 B1 5/2001 Fougnies et al.
6,240,449 B1 5/2001 Nadeau
6,243,689 B1 6/2001 Norton
6,249,573 B1 6/2001 Hudson
6,282,574 B1 8/2001 Voit
6,289,010 B1 9/2001 Voit et al.
6,292,547 B1 9/2001 Katz
6,292,553 B1 9/2001 Fellingham et al.
6,298,062 B1 10/2001 Gardell et al.
6,298,250 B1 10/2001 Nilsson
6,310,859 B1 10/2001 Morita et al.
6,324,280 B2 11/2001 Dunn et al.
6,327,351 B1 12/2001 Walker et al.
6,351,464 B1 2/2002 Galvin et al.
6,359,880 B1 3/2002 Curry et al.
6,363,065 B1 3/2002 Thornton et al.
6,430,275 B1 8/2002 Voit et al.
6,434,143 B1 8/2002 Donovan
6,445,694 B1 9/2002 Swartz
6,449,353 B1 9/2002 Hynes, Jr.
6,460,050 B1 10/2002 Pace et al.
6,480,885 B1 11/2002 Olivier
6,498,791 B2 12/2002 Pickett et al.
6,507,644 B1 1/2003 Henderson et al.
6,553,025 B1 4/2003 Kung et al.
6,560,224 B1 5/2003 Kung et al.
6,574,328 B1 6/2003 Wood et al.
6,594,254 B1 7/2003 Kelly
6,597,686 B1 7/2003 Smyk
6,597,783 B1 7/2003 Tada et al.
6,603,977 B1 8/2003 Walsh et al.
6,608,831 B1 8/2003 Beckstrom et al.
6,636,833 B1 10/2003 Fitcroft et al.
6,650,641 B1 11/2003 Albert et al.
6,674,745 B1 1/2004 Schuster et al.
6,674,850 B2 1/2004 Vu et al.
6,707,901 B1 3/2004 Hodges et al.
6,714,793 B1 3/2004 Carey et al.
6,718,032 B1 3/2004 Vrenjak
6,724,860 B2 4/2004 Stumer et al.
6,744,858 B1 6/2004 Ryan et al.
6,754,181 B1 6/2004 Elliott et al.
6,760,324 B1 7/2004 Scott et al.
6,766,159 B2 7/2004 Lindholm
6,772,188 B1 8/2004 Cheng-Sheng et al.
6,772,210 B1 8/2004 Edholm
6,775,269 B1 8/2004 Kaczmarczyk et al.
6,775,534 B2 8/2004 Lindgren et al.
6,785,266 B2 8/2004 Swartz
6,798,767 B1 9/2004 Alexander et al.
6,804,346 B1 10/2004 Mewhinney
6,819,929 B2 11/2004 Antonucci et al.
6,870,827 B1 3/2005 Voit et al.
6,873,599 B1 3/2005 Han
6,892,184 B1 5/2005 Komen et al.
6,928,479 B1 8/2005 Meyer et al.
6,934,279 B1 8/2005 Sollee et al.
6,937,713 B1 8/2005 Kung et al.
6,944,272 B1 9/2005 Thomas

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,947,531 B1 9/2005 Lewis et al.
6,954,453 B1 10/2005 Schindler
6,954,455 B1 10/2005 Al Hakim et al.
6,961,334 B1 11/2005 Kaczmarczyk
6,963,557 B2 11/2005 Knox
6,963,739 B2 11/2005 Dorenbosch et al.
6,985,440 B1 1/2006 Albert et al.
6,993,015 B2 1/2006 Kobayashi
7,006,508 B2 2/2006 Bondy et al.
7,010,727 B1 3/2006 Stucker
7,016,343 B1 3/2006 Mermel et al.
7,027,564 B2 4/2006 James
7,042,985 B1 5/2006 Wright
7,046,658 B1 5/2006 Kundaje
7,047,561 B1 5/2006 Lee
7,051,072 B2 5/2006 Stewart et al.
7,055,174 B1 5/2006 Cope et al.
7,068,668 B2 6/2006 Feuer
7,068,772 B1 6/2006 Widger et al.
7,079,526 B1 7/2006 Wipliez et al.
7,110,523 B2 9/2006 Gagle et al.
7,120,682 B1 10/2006 Salama
7,151,772 B1 12/2006 Kalmanek, Jr. et al.
7,174,156 B1 2/2007 Mangal
7,177,399 B2 2/2007 Dawson et al.
7,203,478 B2 4/2007 Benco et al.
7,212,522 B1 5/2007 Shankar et al.
7,218,722 B1 5/2007 Turner et al.
7,277,528 B2 10/2007 Rao et al.
7,330,835 B2 2/2008 Deggendorf
7,346,156 B1 3/2008 Choupak et al.
7,359,368 B1 4/2008 Pearce
7,366,157 B1 4/2008 Valentine et al.
7,400,881 B2 7/2008 Kallio
7,412,049 B1 8/2008 Koch
7,426,492 B1 9/2008 Bishop et al.
7,436,835 B2 10/2008 Castleberry et al.
7,437,665 B2 10/2008 Perham
7,440,441 B2 10/2008 Lakhani et al.
7,440,442 B2 10/2008 Grabelsky et al.
7,447,707 B2 11/2008 Gaurav et al.
7,453,990 B2 11/2008 Welenson et al.
7,454,200 B2 11/2008 Cai et al.
7,454,510 B2 11/2008 Kleyman et al.
7,457,865 B2 11/2008 Ramakrishnan et al.
7,477,843 B1 1/2009 Peeters et al.
7,486,664 B2 2/2009 Swartz
7,486,667 B2 2/2009 Feuer
7,486,684 B2 2/2009 Chu et al.
7,512,117 B2 3/2009 Swartz
7,545,761 B1 6/2009 Kalbag
7,567,131 B2 7/2009 Rollender et al.
7,573,982 B2 8/2009 Breen et al.
7,580,886 B1 8/2009 Schulz
7,587,036 B2 9/2009 Wood et al.
7,593,390 B2 9/2009 Lebizay
7,593,884 B2 9/2009 Rothman et al.
7,599,944 B2 10/2009 Gaurav et al.
7,616,753 B2 11/2009 Cope et al.
7,639,792 B2 12/2009 Qiu et al.
7,644,037 B1 1/2010 Ostrovsky
7,647,500 B2 1/2010 Machiraju et al.
7,657,011 B1 2/2010 Zielinski et al.
7,664,495 B1 2/2010 Bonner et al.
7,676,215 B2 3/2010 Chin et al.
7,676,431 B2 3/2010 O'Leary et al.
7,680,114 B2 3/2010 Yazaki et al.
7,680,737 B2 3/2010 Smith et al.
7,702,308 B2 4/2010 Rollender
7,715,413 B2 5/2010 Vaziri et al.
7,715,821 B2 5/2010 Rollender
7,734,544 B2 6/2010 Schleicher
7,738,384 B2 6/2010 Pelletier
7,764,777 B2 7/2010 Wood et al.
7,764,944 B2 7/2010 Rollender
7,765,261 B2 7/2010 Kropivny
7,765,263 B1 7/2010 Alfke
7,765,266 B2 7/2010 Kropivny
7,774,711 B2 8/2010 Valeski
7,797,459 B1 9/2010 Roy et al.
7,822,188 B1 10/2010 Kirchhoff et al.
7,836,136 B1 11/2010 Alfke
7,882,011 B2 2/2011 Sandhu et al.
7,894,441 B2 2/2011 Yazaki et al.
7,899,742 B2 3/2011 Berkert et al.
7,907,551 B2 3/2011 Croy et al.
7,907,714 B2 3/2011 Baniak et al.
7,916,846 B1 3/2011 Farah
7,929,955 B1 4/2011 Bonner
7,944,909 B2 5/2011 James
7,950,046 B2 5/2011 Kropivny
7,958,233 B2 6/2011 Gutierrez
7,965,645 B2 6/2011 Pelletier
7,979,529 B2 7/2011 Kreusch et al.
7,995,589 B2 8/2011 Sollee et al.
8,024,785 B2 9/2011 Andress et al.
8,027,333 B2 9/2011 Grabelsky et al.
8,036,362 B1 10/2011 Skinner
8,036,366 B2 10/2011 Chu
8,041,022 B1 10/2011 Andreasen et al.
8,050,273 B2 11/2011 Gass
8,060,887 B2 11/2011 Kropivny
8,078,164 B2 12/2011 Ganesan
8,111,690 B2 2/2012 Hussain et al.
8,116,307 B1 2/2012 Thesayi et al.
8,125,982 B2 2/2012 Feuer
8,127,005 B2 2/2012 Gutierrez
8,145,182 B2 3/2012 Rudolf et al.
8,161,078 B2 4/2012 Gaurav et al.
8,166,533 B2 4/2012 Yuan
8,166,547 B2 4/2012 Bevan et al.
8,189,568 B2 5/2012 Qiu et al.
8,190,739 B2 5/2012 Gutierrez
8,200,575 B2 6/2012 Torres et al.
8,204,044 B2 6/2012 Lebizay
8,219,115 B1 7/2012 Nelissen
8,223,927 B2 7/2012 Di Serio et al.
8,228,837 B2 7/2012 Sheriff et al.
8,228,897 B2 7/2012 Mitchell
8,243,730 B1 8/2012 Wong et al.
8,244,204 B1 8/2012 Chen et al.
8,275,404 B2 9/2012 Berger et al.
8,300,632 B2 10/2012 Davis et al.
8,306,021 B2 11/2012 Lawson et al.
8,306,063 B2 11/2012 Erdal et al.
8,315,521 B2 11/2012 Leiden et al.
8,339,997 B2 12/2012 Dye et al.
8,351,591 B2 1/2013 Kirchhoff et al.
8,363,647 B2 1/2013 Fangman et al.
8,364,172 B2 1/2013 Guanfeng et al.
8,396,445 B2 3/2013 Crawford et al.
8,410,907 B2 4/2013 Twitchell, Jr.
8,417,791 B1 4/2013 Peretz et al.
8,422,507 B2 4/2013 Björsell et al.
8,423,791 B1 4/2013 Yu et al.
8,427,981 B2 4/2013 Wyss et al.
8,437,340 B2 5/2013 James
8,462,915 B2 6/2013 Breen et al.
8,468,196 B1 6/2013 Roskind et al.
8,493,931 B1 7/2013 Nix
8,509,225 B2 8/2013 Grabelsky et al.
8,526,306 B2 9/2013 Jungck et al.
8,532,075 B2 9/2013 Rassool et al.
8,537,805 B2 9/2013 Björsell et al.
8,542,815 B2 9/2013 Perreault et al.
8,543,477 B2 9/2013 Love et al.
8,594,298 B2 11/2013 Klein et al.
8,599,747 B1 12/2013 Saleem et al.
8,599,837 B2 12/2013 Kyle
8,605,714 B2 12/2013 Lebizay
8,605,869 B1 12/2013 Mobarak et al.
8,607,323 B2 12/2013 Yuan
8,611,354 B2 12/2013 Keränen et al.
8,625,578 B2 1/2014 Roy et al.

(56) **References Cited**

U.S. PATENT DOCUMENTS

8,627,211	B2	1/2014	Kropivny	
8,630,234	B2	1/2014	Björsell et al.	
8,634,838	B2	1/2014	Hellwig et al.	
8,675,566	B2	3/2014	Huttunen et al.	
8,682,919	B1	3/2014	Golliher	
8,702,505	B2	4/2014	Kropivny	
8,713,098	B1	4/2014	Adya et al.	
8,724,643	B2	5/2014	Feuer	
8,749,610	B1	6/2014	Gossweiler et al.	
8,750,290	B2	6/2014	Vance et al.	
8,763,081	B2	6/2014	Bogdanovic et al.	
8,767,717	B2	7/2014	Siegel et al.	
8,768,951	B2	7/2014	Crago	
8,774,171	B2	7/2014	Mitchell	
8,774,378	B2	7/2014	Björsell et al.	
8,774,721	B2	7/2014	Hertel et al.	
8,780,703	B1	7/2014	Eidelson et al.	
8,792,374	B1	7/2014	Jain et al.	
8,792,905	B1	7/2014	Li et al.	
8,804,705	B2	8/2014	Fangman et al.	
8,805,345	B2	8/2014	Ling et al.	
8,810,392	B1	8/2014	Teller et al.	
8,819,566	B2	8/2014	Mehin et al.	
8,837,360	B1	9/2014	Mishra et al.	
8,838,539	B1	9/2014	Ashcraft et al.	
8,848,887	B2	9/2014	Willman et al.	
8,862,701	B2	10/2014	Havriluk	
8,885,609	B2	11/2014	Nix	
8,903,051	B2	12/2014	Li et al.	
8,903,360	B2	12/2014	Celi, Jr. et al.	
8,909,556	B2	12/2014	Huxham	
8,938,209	B2	1/2015	Crawford et al.	
8,938,534	B2	1/2015	Le et al.	
8,948,061	B2	2/2015	Sridhar	
8,972,612	B2	3/2015	Le et al.	
8,982,719	B2	3/2015	Seetharaman et al.	
8,995,428	B2	3/2015	Haster	
9,003,306	B2	4/2015	Mehin et al.	
9,094,525	B2	7/2015	Dye et al.	
9,179,005	B2	11/2015	Perreault et al.	
9,253,332	B2	2/2016	Dye et al.	
9,432,830	B2	8/2016	Lahtiranta et al.	
9,537,762	B2	1/2017	Perreault et al.	
9,549,071	B2	1/2017	Björsell et al.	
9,565,307	B2	2/2017	Björsell et al.	
9,813,330	B2	11/2017	Perreault et al.	
9,826,002	B2	11/2017	Perreault et al.	
9,935,872	B2	4/2018	Perreault et al.	
9,948,549	B2	4/2018	Perreault et al.	
10,218,606	B2	2/2019	Perreault et al.	
2001/0027478	A1	10/2001	Meier et al.	
2001/0028642	A1	10/2001	Veschi	
2001/0052081	A1	12/2001	McKibben et al.	
2002/0002041	A1	1/2002	Lindgren et al.	
2002/0018445	A1	2/2002	Kobayashi	
2002/0051518	A1	5/2002	Bondy et al.	
2002/0057764	A1	5/2002	Salvucci et al.	
2002/0068545	A1	6/2002	Oyama et al.	
2002/0101974	A1	8/2002	Zbib	
2002/0116464	A1	8/2002	Mak	
2002/0122391	A1	9/2002	Shalit	
2002/0122547	A1	9/2002	Hinchey et al.	
2002/0141352	A1	10/2002	Fangman et al.	
2002/0150080	A1	10/2002	Bhattacharya et al.	
2003/0008635	A1	1/2003	Ung et al.	
2003/0012196	A1	1/2003	Ramakrishnan	
2003/0043974	A1	3/2003	Emerson, III	
2003/0091028	A1	5/2003	Chang et al.	
2003/0095539	A1	5/2003	Feuer	
2003/0095541	A1	5/2003	Chang et al.	
2003/0114145	A1*	6/2003	Boda	H04L 67/04 455/412.1
2003/0121967	A1	7/2003	Goldberg et al.	
2003/0179747	A1	9/2003	Pyke et al.	
2003/0200311	A1	10/2003	Baum	
2003/0211840	A1	11/2003	Castrogiovanni et al.	
2003/0219103	A1	11/2003	Rao et al.	
2004/0009761	A1	1/2004	Money et al.	
2004/0019539	A1	1/2004	Raman et al.	
2004/0022237	A1	2/2004	Elliot et al.	
2004/0034793	A1	2/2004	Yuan	
2004/0157629	A1	8/2004	Kallio et al.	
2004/0165709	A1	8/2004	Pence et al.	
2004/0181599	A1	9/2004	Kreusch et al.	
2004/0202295	A1	10/2004	Shen et al.	
2004/0203565	A1	10/2004	Chin et al.	
2004/0203582	A1	10/2004	Dorenbosch et al.	
2004/0218748	A1	11/2004	Fisher	
2004/0240439	A1	12/2004	Castleberry et al.	
2004/0255126	A1	12/2004	Reith	
2005/0007999	A1	1/2005	Becker et al.	
2005/0021939	A1	1/2005	Le et al.	
2005/0025043	A1	2/2005	Mussman et al.	
2005/0063519	A1	3/2005	James	
2005/0069097	A1	3/2005	Hanson et al.	
2005/0083911	A1	4/2005	Grabelsky et al.	
2005/0094651	A1	5/2005	Lutz et al.	
2005/0131813	A1	6/2005	Gallagher et al.	
2005/0135401	A1	6/2005	Schmidt	
2005/0164704	A1	7/2005	Winsor	
2005/0169248	A1	8/2005	Truesdale et al.	
2005/0171898	A1	8/2005	Bishop et al.	
2005/0174937	A1	8/2005	Scoggins et al.	
2005/0177843	A1	8/2005	Williams	
2005/0188081	A1	8/2005	Gibson et al.	
2005/0190892	A1	9/2005	Dawson et al.	
2005/0192897	A1	9/2005	Rogers et al.	
2005/0192901	A1	9/2005	McCoy et al.	
2005/0198499	A1	9/2005	Salapaka et al.	
2005/0202799	A1	9/2005	Rollender	
2005/0222952	A1	10/2005	Garrett et al.	
2005/0267842	A1	12/2005	Weichert et al.	
2005/0287979	A1	12/2005	Rollender	
2006/0006224	A1	1/2006	Modi	
2006/0007940	A1	1/2006	Sollee et al.	
2006/0013266	A1	1/2006	Vega-Garcia et al.	
2006/0025122	A1	2/2006	Harris et al.	
2006/0030290	A1	2/2006	Rudolf et al.	
2006/0036522	A1	2/2006	Perham	
2006/0072547	A1	4/2006	Florkey et al.	
2006/0072550	A1	4/2006	Davis et al.	
2006/0078094	A1	4/2006	Breen et al.	
2006/0093135	A1	5/2006	Fiatal et al.	
2006/0095320	A1	5/2006	Jones	
2006/0109960	A1	5/2006	D'Evelyn et al.	
2006/0111116	A1	5/2006	Palmer et al.	
2006/0116892	A1	6/2006	Grimes et al.	
2006/0142011	A1	6/2006	Kallio	
2006/0146797	A1	7/2006	Lebizay	
2006/0153342	A1	7/2006	Sasaki	
2006/0160565	A1	7/2006	Singh et al.	
2006/0177035	A1	8/2006	Cope et al.	
2006/0189303	A1	8/2006	Rollender	
2006/0195398	A1	8/2006	Dheer et al.	
2006/0195584	A1	8/2006	Baumann	
2006/0205383	A1	9/2006	Rollender et al.	
2006/0209768	A1	9/2006	Yan et al.	
2006/0233317	A1	10/2006	Coster et al.	
2006/0248186	A1	11/2006	Smith	
2006/0251056	A1	11/2006	Feuer	
2006/0258328	A1	11/2006	Godoy	
2006/0264200	A1	11/2006	Laiho et al.	
2006/0268921	A1	11/2006	Ekstrom et al.	
2006/0281437	A1	12/2006	Cook	
2007/0016524	A1	1/2007	Diveley et al.	
2007/0036139	A1	2/2007	Patel et al.	
2007/0036143	A1	2/2007	Alt et al.	
2007/0047548	A1	3/2007	Yazaki et al.	
2007/0053382	A1	3/2007	Bevan et al.	
2007/0061397	A1	3/2007	Gregorat et al.	
2007/0064919	A1	3/2007	Chen et al.	
2007/0092070	A1	4/2007	Croy et al.	
2007/0112964	A1	5/2007	Guedalia et al.	
2007/0115935	A1	5/2007	Qiu et al.	

(56) **References Cited**

U.S. PATENT DOCUMENTS

2007/0121590 A1 5/2007 Turner et al.
2007/0121593 A1 5/2007 Vance et al.
2007/0121602 A1 5/2007 Sin et al.
2007/0121866 A1 5/2007 Kniveton et al.
2007/0127676 A1 6/2007 Khadri
2007/0174469 A1 7/2007 Andress et al.
2007/0217354 A1 9/2007 Buckley
2007/0220038 A1 9/2007 Crago
2007/0230423 A1* 10/2007 Yoshida H04W 76/10 370/338
2007/0253418 A1 11/2007 Shiri et al.
2007/0253429 A1 11/2007 James
2007/0263609 A1 11/2007 Mitchell
2007/0286170 A1* 12/2007 Khan H04L 12/66 370/356
2007/0297376 A1 12/2007 Gass
2008/0013523 A1 1/2008 Nambakkam
2008/0037715 A1 2/2008 Prozeniuk et al.
2008/0043718 A1 2/2008 Chu
2008/0056235 A1* 3/2008 Albina H04M 7/123 370/352
2008/0056243 A1 3/2008 Roy et al.
2008/0056302 A1 3/2008 Erdal et al.
2008/0063153 A1 3/2008 Krivorot et al.
2008/0160953 A1* 7/2008 Mia H04M 7/0057 455/404.2
2008/0166999 A1 7/2008 Guedalia et al.
2008/0167019 A1 7/2008 Guedalia et al.
2008/0167020 A1 7/2008 Guedalia et al.
2008/0167039 A1 7/2008 Guedalia et al.
2008/0187122 A1 8/2008 Baker
2008/0188198 A1 8/2008 Patel et al.
2008/0188227 A1 8/2008 Guedalia et al.
2008/0205378 A1 8/2008 Wyss et al.
2008/0261560 A1* 10/2008 Ruckart G07C 9/00103 455/411
2008/0310599 A1 12/2008 Purnadi et al.
2009/0003535 A1 1/2009 Grabelsky et al.
2009/0012851 A1 1/2009 Marc
2009/0017842 A1* 1/2009 Fukasaku H04M 3/42042 455/457
2009/0028146 A1 1/2009 Kleyman et al.
2009/0129566 A1 5/2009 Feuer
2009/0135724 A1 5/2009 Zhang et al.
2009/0135735 A1 5/2009 Zhang et al.
2009/0141883 A1 6/2009 Bastien
2009/0213839 A1 8/2009 Davis et al.
2009/0214000 A1 8/2009 Patel et al.
2009/0238168 A1 9/2009 Lavoie et al.
2009/0268615 A1 10/2009 Pelletier
2009/0292539 A1 11/2009 Jaroker
2009/0296900 A1 12/2009 Breen et al.
2009/0325558 A1 12/2009 Pridmore et al.
2010/0002701 A1 1/2010 Hsieh et al.
2010/0008345 A1 1/2010 Lebizay
2010/0039946 A1 2/2010 Imbimbo et al.
2010/0083364 A1 4/2010 Gutierrez
2010/0086119 A1 4/2010 De Luca et al.
2010/0105379 A1 4/2010 Bonner et al.
2010/0114896 A1 5/2010 Clark et al.
2010/0115018 A1 5/2010 Yoon et al.
2010/0128729 A1 5/2010 Yazaki et al.
2010/0142382 A1 6/2010 Jungck et al.
2010/0150138 A1 6/2010 Björsell et al.
2010/0150328 A1 6/2010 Perrault et al.
2010/0172345 A1 7/2010 Björsell et al.
2010/0177671 A1 7/2010 Qiu et al.
2010/0220852 A1 9/2010 Willman et al.
2010/0233991 A1 9/2010 Crawford et al.
2010/0246589 A1 9/2010 Pelletier
2010/0272242 A1 10/2010 Croy et al.
2010/0278534 A1 11/2010 Leiden et al.
2010/0316195 A1 12/2010 Di Serio et al.
2011/0013541 A1 1/2011 Croy et al.
2011/0072095 A1 3/2011 Havriluk
2011/0122827 A1 5/2011 Björsell et al.
2011/0153809 A1 6/2011 Ghanem et al.
2011/0167164 A1 7/2011 Gutierrez
2011/0176541 A1 7/2011 James
2011/0201321 A1 8/2011 Bonner
2011/0208859 A1 8/2011 Gutierrez
2011/0235543 A1 9/2011 Seetharaman et al.
2011/0255553 A1 10/2011 Bobba et al.
2011/0261717 A1 10/2011 Akuzuwa et al.
2011/0267986 A1 11/2011 Grabelsky et al.
2011/0273526 A1 11/2011 Mehin et al.
2011/0276903 A1 11/2011 Mehin et al.
2011/0276904 A1 11/2011 Mehin et al.
2011/0292929 A1 12/2011 Haster
2012/0014383 A1 1/2012 Geromel et al.
2012/0089717 A1 4/2012 Chen
2012/0096145 A1 4/2012 Le et al.
2012/0099599 A1 4/2012 Keränen et al.
2012/0113981 A1 5/2012 Feuer
2012/0155333 A1 6/2012 Yoon et al.
2012/0170574 A1 7/2012 Huttunen et al.
2012/0195236 A1 8/2012 Knight
2012/0195415 A1 8/2012 Wyss et al.
2012/0227101 A1 9/2012 Yuan
2012/0250624 A1 10/2012 Lebizay
2012/0259975 A1 10/2012 Le et al.
2012/0270554 A1 10/2012 Hellwig et al.
2012/0282881 A1 11/2012 Mitchell
2012/0314699 A1 12/2012 Qiu et al.
2013/0039226 A1 2/2013 Sridhar
2013/0097308 A1 4/2013 Le et al.
2013/0114589 A1 5/2013 Fangnnan et al.
2013/0128879 A1 5/2013 Kyle
2013/0148549 A1 6/2013 Crawford et al.
2013/0173534 A1 7/2013 Nelakonda et al.
2013/0223276 A1 8/2013 Padgett
2013/0229950 A1 9/2013 Björsell et al.
2013/0237198 A1 9/2013 Vashi et al.
2013/0254301 A1 9/2013 Lin et al.
2013/0272297 A1 10/2013 Breen et al.
2013/0281147 A1 10/2013 Denman et al.
2013/0287006 A1 10/2013 Nix
2013/0310002 A1 11/2013 Celi, Jr. et al.
2013/0318166 A1 11/2013 Jungck et al.
2013/0329722 A1 12/2013 Perrault et al.
2013/0329864 A1 12/2013 Björsell et al.
2014/0010119 A1 1/2014 Björsell et al.
2014/0016764 A1 1/2014 Björsell et al.
2014/0101749 A1 4/2014 Yuan
2014/0141884 A1 5/2014 Kropivny
2014/0153477 A1 6/2014 Huttunen et al.
2014/0211789 A1 7/2014 Feuer
2014/0215642 A1 7/2014 Huxham
2014/0220944 A1 8/2014 Balasubramanian
2014/0244393 A1 8/2014 Rimmer et al.
2014/0247730 A1 9/2014 Thota et al.
2014/0269624 A1 9/2014 Khay-Ibbat et al.
2014/0307858 A1 10/2014 Li et al.
2014/0321333 A1 10/2014 Björsell et al.
2014/0324969 A1 10/2014 Riddle
2014/0337961 A1 11/2014 Chien et al.
2014/0337962 A1 11/2014 Brandstatter
2014/0349602 A1 11/2014 Majumdar et al.
2015/0327320 A1 11/2015 Huttunen et al.
2015/0358470 A1 12/2015 Björsell et al.
2016/0006882 A1 1/2016 Björsell et al.
2016/0028619 A1 1/2016 Perreault et al.
2017/0104868 A1 4/2017 Björsell et al.
2017/0111265 A1 4/2017 Perreault et al.
2017/0126752 A1 5/2017 Perreault et al.
2017/0142256 A1 5/2017 Björsell et al.
2019/0199621 A1 6/2019 Perreault et al.

FOREIGN PATENT DOCUMENTS

CA 2 218 218 A1 10/1997
CA 2249668 4/1999
CA 2 299 037 A1 8/2000

(56) **References Cited**

FOREIGN PATENT DOCUMENTS

CA	2 437 275	A1	10/2002
CA	2598200	A1	2/2008
CA	2668025	A1	5/2008
CA	3032707	A1	5/2008
CA	3045672	A1	5/2008
CA	3045681	A1	5/2008
CA	3045683	A1	5/2008
CA	3045694	A1	5/2008
CA	2670510	A1	6/2008
CA	2681984	A1	10/2008
CA	2 690 236	A1	12/2008
CA	2 659 007	A1	9/2009
CA	2732148	A1	2/2010
CA	2 778 905	A1	8/2010
CA	2812174	A1	3/2011
CA	2732148	C	6/2018
CA	2668025	C	2/2020
CN	1498029	A	5/2004
CN	1498482	A	5/2004
CN	1668137	A	9/2005
CN	1274114	C	9/2006
CN	101005503	A	7/2007
CN	101069390	A	11/2007
CN	101095329	A	12/2007
CN	101584150	A	11/2009
CN	101584166	A	11/2009
CN	101605342	A	12/2009
CN	1498029	B	5/2010
CN	101772929	A	7/2010
CN	101069390	B	12/2010
CN	102137024	A	7/2011
CN	102457494	A	5/2012
CN	102484656	A	5/2012
CN	102572123	A	7/2012
CN	101095329	B	10/2012
CN	101605342	B	12/2012
CN	102833232	A	12/2012
CN	101005503	B	1/2013
CN	101772929	B	7/2014
CN	102457494	B	10/2014
DE	602 01 827	T2	11/2005
DE	11 2005 003 306	T5	1/2008
DE	601 33 316	T2	7/2008
DE	603 17 751	T2	11/2008
EP	0 841 832	A2	5/1998
EP	0 841 832	A3	5/1999
EP	1 032 224	A2	8/2000
EP	1 032 224	A3	8/2000
EP	1054569	A1	11/2000
EP	1 244 250	A1	9/2002
EP	1 266 516	A2	12/2002
EP	1 362 456	A2	11/2003
EP	1 371 173	A1	12/2003
EP	1 389 862	A1	2/2004
EP	1 411 743	A1	4/2004
EP	1 389 862	B1	11/2004
EP	1 526 697	A2	4/2005
EP	1 362 456	A4	5/2005
EP	1 575 327	A1	9/2005
EP	1 610 583	A1	12/2005
EP	1 526 697	A3	3/2006
EP	1 721 446	A1	11/2006
EP	1 829 300	A1	9/2007
EP	1 371 173	B1	11/2007
EP	1 411 743	B1	11/2007
EP	1 362 456	B1	3/2008
EP	1 974 304	A2	10/2008
EP	1 974 304	A4	10/2008
EP	1 610 583	B1	8/2009
EP	2 084 868		8/2009
EP	2 090 024		8/2009
EP	2 127 232	A1	12/2009
EP	2 165 489	A1	3/2010
EP	2 215 755	A1	8/2010
EP	2 227 048	A1	9/2010
EP	2 127 232	A4	3/2011
EP	2 165 489	A4	3/2011
EP	2 311 292		4/2011
EP	1 829 300	A4	5/2012
EP	2 449 749	A1	5/2012
EP	2 478 678		7/2012
EP	2 215 755	A4	10/2012
EP	1 829 300	B1	11/2012
EP	2 449 749	B1	3/2014
EP	1 266 516	B1	5/2014
EP	2311292	A4	5/2014
EP	2084868	B1	5/2018
EP	3386155	A1	10/2018
EP	2311292		4/2020
GB	2 332 337	A	6/1999
IN	24/2009		6/2009
IN	29/2009		7/2009
IN	287412		9/2017
JP	2011-199384	A	10/2011
KR	10-2009-0086428	A	8/2009
KR	10-2009-0095621	A	9/2009
MX	2009004811	A	8/2009
MX	2009005751	A	8/2009
SG	151991		6/2009
SG	152752		6/2009
SG	155474		10/2009
WO	WO 2000/069156	A1	11/2000
WO	WO 2001/006740	A2	1/2001
WO	WO 01/50693	A1	7/2001
WO	WO 01/69899	A2	9/2001
WO	WO 01/69899	A3	9/2001
WO	WO 01/80587	A1	10/2001
WO	WO 01/89145	A2	11/2001
WO	WO 0223851	A2	3/2002
WO	WO 0225889	A2	3/2002
WO	WO 02/082728	A1	10/2002
WO	WO 02/082782	A2	10/2002
WO	WO 02/082782	A3	10/2002
WO	WO 03/027801	A2	4/2003
WO	WO 2003/028355	A1	4/2003
WO	WO 2003/096559	A1	11/2003
WO	WO 2004/008786	A1	1/2004
WO	WO 2004/102941	A1	11/2004
WO	WO 2005/084002	A1	9/2005
WO	WO 2006/067269	A1	6/2006
WO	WO 2006/072099	A1	7/2006
WO	WO 2006/078175	A2	7/2006
WO	WO 2006/078175	A3	7/2006
WO	WO 2007/044454	A2	4/2007
WO	WO 2007/056158	A2	5/2007
WO	WO 2007/087077	A2	8/2007
WO	WO 2007/087077	A3	8/2007
WO	WO 2008/027065	A1	3/2008
WO	WO 2008/052340	A1	5/2008
WO	WO 2008/064481	A1	6/2008
WO	WO 2008/085614	A2	7/2008
WO	WO 2008/085614	A3	7/2008
WO	WO 2008/086350	A2	7/2008
WO	WO 2008/086350	A3	7/2008
WO	WO 2008/103652	A1	8/2008
WO	WO 2008/116296	A1	10/2008
WO	WO 2008/085614	A8	12/2008
WO	WO 2008/151406	A1	12/2008
WO	WO 2008/151406	A8	12/2008
WO	WO 2009/070202	A1	6/2009
WO	WO 2009/070278	A1	6/2009
WO	W00200902627		9/2009
WO	WO 2010/012090	A2	2/2010
WO	WO 2011/000405	A1	1/2011
WO	WO 2011/032256	A1	3/2011
WO	WO 2013/013189	A2	1/2013
WO	WO 2013/120069	A1	8/2013
WO	WO 2014/066155	A2	5/2014
WO	WO 2014/117599	A1	8/2014
WO	WO 2014-166258	A1	10/2014

(56) **References Cited**

OTHER PUBLICATIONS

Huitema et al., "Architecture for Internet Telephony Service for Residential Customers," Academic Paper for *Bellcore*, Mar. 2, 1999, pp. 1-14.
Stallings, William, "The Session Initiation Protocol," *The Internet Protocol Journal*, vol. 6, No. 1, Mar. 2003, pp. 20-30.
Chinese Office Action dated Mar. 24, 2011 for Chinese Patent Application No. CN 200780049791.5.
Chinese Office Action dated Jun. 23, 2011 for Chinese Patent Application No. CN 200780049136.X.
Indonesian Examination Report dated Jul. 5, 2012 for Indonesian Patent Application No. W-00200901414.
Indonesian Examination Report dated Feb. 8, 2013 for Indonesian Patent Application No. W-00200901165.
Mexican Exam Report dated Jul. 11, 2011 for Mexican Patent Application No. MX/a/2009/004811.
Mexican Notice of Allowance dated Sep. 2, 2011 for Mexican Patent Application No. MX/a/2009/005751.
Canadian Office Action dated Jan. 27, 2015 for Canadian Patent Application No. CA 2,681,984.
Extended European Search Report dated Apr. 16, 2014 for European Patent Application No. EP 09 802 316.1 which shares priority of U.S. Appl. No. 61/129,898, filed Jul. 28, 2008 with captioned U.S. Appl. No. 14/035,806.
Baker et al., "Cisco Support for Lawful Intercept in IP Networks," Internet Draft—working document of the Internet Engineering Task Force (IETF), accessible at http://www.ietf.org/ietf/lid-abstracts.txt, Apr. 2003, expires Sep. 30, 2003, pp. 1-15.
Bhushan et al., "Federated Accounting: Service Charging and Billing in a Business-to-Business Environment," 0-7803-6719-7/01, © 2001 IEEE, pp. 107-121.
Jajszczyk et al., "Emergency Calls in Flow-Aware Networks," *IEEE Communications Letters*, vol. 11, No. 9, Sep. 2007, pp. 753-755.
Kim et al., "An Enhanced VoIP Emergency Services Prototype," *Proceedings of the 3rd International ISCRAM Conference* (B. Van de Walle and M. Turoff, eds.), Newark, NJ (USA), May 2006, pp. 1-8.
Kornfeld et al., "DVB-H and IP Datacast—Broadcast to Handheld Devices," *IEEE Transactions on Broadcasting*, vol. 53, No. 1, Mar. 2007, pp. 161-170.
Kortebi et al., "SINR-Based Routing in Multi-Hop Wireless Networks to Improve VoIP Applications Support," 1-4244-0667-6/07, © 2007 IEEE, pp. 491-496.
Lee et al., "VoIP Interoperation with KT-NGN," in *The 6th International Conference on Advanced Communication Technology*, Technical Proceedings, 2004, pp. 126-128, accompanied by Title and Contents—4 pages.
Lin et al., "Effective VoIP Call Routing in WLAN and Cellular Integration," *IEEE Communications Letters*, vol. 9, No. 10, Oct. 2005, pp. 874-876.
Ma et al., "Realizing MPEG4 Video Transmission Based on Mobile Station over GPRS," 0-7803-9335-X/05, © 2005 IEEE, pp. 1241-1244.
Mintz-Habib et al., "A VoIP Emergency Services Architecture and Prototype," {mm2571,asr,hgs,xiaotaow}@cs.columbia.edu, 0-7803-9428-3/05, © 2005 IEEE, pp. 523-528.
Munir, Muhammad Farukh, "Study of an Adaptive Scheme for Voice Transmission on IP in a Wireless Networking Environment 802.11e," Dept. of Networks and Distributed Computing, *Ecole Supérieure En Sciences Informatiques* (*ESSI*), *Université De Nice*, Jun. 2005, (pp. 1-35), Best Available Copy—pp. 1-11.
Sripanidkulchai et al., "Call Routing Management in Enterprise VoIP Networks," *Copyright 2007 ACM* 978-1-59593-788-09/07/0008, 6 pages.
Thernelius, Fredrik, "SIP, NAT, and Firewalls," Master's Thesis, *Ericsson, Department of Teleinformatics*, May 2000, pp. 1-69.
Trad et al., "Adaptive VoIP Transmission over Heterogeneous Wired/Wireless Networks," *V. Roca and F. Rousscau* (*Eds.*): *MIPS 2004, LNCS 3311*, pp. 25-36, 2004, © Springer-Verlag Berlin Heidelberg 2004.
Yu et al., "Service-Oriented Issues: Mobility, Security, Charging and Billing Management in Mobile Next Generation Networks," *IEEE BcN2006*, 1-4244-0146-1/06, © 2006 IEEE, pp. 1-10.
Ketchpel et al. "U-PAI: A universal payment application interface" *Second USENIX Workshop on Electronic Commerce Proceedings*, Aug. 1996, pp. 1-17.
Moberg & Drummond, "MIME-Based Secure Peer-to-Peer Business Data Interchange Using HTTP, Applicability Statement 2 (AS2)," *Network Working Group, Request for Comments: 4130, Category: Standards Track*, Copyright © The Internet Society Jul. 2005, pp. 1-47.
Abrazhevich, Dennis. "Electronic Payment Systems: a User-Centered Perspective and Interaction Design," *Thesis under the auspices of the J.F. Schouten School for User-System Interaction Research*, Technische Universiteit Eindhoven, Netherlands, 2004, pp. Cover page—p. 189.
Extended European Search Report dated Nov. 2, 2012 for European Application No. EP 07 855 436.7.
Extended European Search Report dated Dec. 20, 2013 for European Application No. EP 09 849 358.8.
F. Baker et al. "RFC 3924—Cisco Architecture for Lawful Intercept in IP Networks." Oct. 2004.
Cisco. "*Lawful Intercept Requirements Summary*." http://www.faqs.org/rfcs/rfc3924.html. Nov. 8, 2006.
Sippy SIP B2BUA. "*About Sippy RTPproxy*." http://www.rtpproxy.org. Jul. 15, 2009.
ETSI Technical Specification. "Lawful Interception (LI); Handover Interface and Service-Specific Details (SSD) for IP delivery; Part 5: Service-specific details for IP Multimedia Services." Apr. 2008, 25 pgs, v.2.3.1, France.
M. Handley et al. "RFC 2543—SIP: Session Initiation Protocol." Mar. 1999.
The International Search Report and Written Opinion of the International Searching Authority completed Jun. 6, 2008 for related PCT/CA2008/000545.
The International Search Report and Written Opinion of the International Searching Authority completed Feb. 6, 2008 for corresponding PCT/CA2007/001956.
The International Preliminary Report on Patentability dated May 14, 2009 for corresponding PCT/CA2007/001956.
The International Search Report and Written Opinion of the International Searching Authority completed Mar. 3, 2008 for related PCT/CA2007/002150.
The International Preliminary Report on Patentability dated Feb. 13, 2009 for related PCT/CA2007/002150.
The International Preliminary Report on Patentability and Written Opinion of the International Searching Authority dated Feb. 10, 2011 for related PCT Application No. PCT/CA2009/001062, Feb. 1, 2011.
The Written Opinion and International Search Report completed on Jun. 18, 2010 for related PCT Application No. PCT/CA2009/001317.
The International Search Report and Written Opinion dated on Mar. 12, 2010 for corresponding PCT Application No. PCT/CA2009/001062.
The International Preliminary Report on Patentability dated Sep. 29, 2009 for PCT/CA2008/000545.
The International Preliminary Report on Patentability dated Mar. 20, 2012 for PCT/CA2009/001317.
Townsley, et al.; "RFC 2661—Layer Two Tunneling Protocol 'L2TP' ", Aug. 1999.
IP2Location, http://www.ip2location.com/; printed Jun. 20, 2012.
DOTS IP Address Validation, "Overview", http://www.serviceobjects.com/products/dots_ipgeo.asp; printed Jun. 21, 2012.
List of North American Numbering Plan area codes, http://en.wikipedia.org/wiki/List_of NANP_area_codes; printed Jun. 20, 2012.
DOTS Phone Exchange, "Overview", http://www.serviceobjects.com/demos/PhoneExchangeDemo.asp (URL no longer valid, current URL is http://www.serviceobjects.com/products/phone/phone-exchange); printed Jun. 21, 2012.
Rosenberg, et al.; "RFC 3261—SIP: Session Initiation Protocol", Jun. 2002.

(56) **References Cited**

OTHER PUBLICATIONS

Lind AT&T S: "ENUM Call Flows for VoIP Interworking; draft-lind-enum-callflows-03.txt", Feb. 1, 2002, No. 3, Feb. 1, 2002, pp. 1-17, XP015004214, ISSN: 0000-0004.

IETF ENUM WG R Stastny OEFEG Informational Numbering for VoIP and Other IP Communications: "Numbering for ViOP and other IP Communications, draft-stastny-enum-numbering-voip-00.txt", Oct. 1, 2003, Oct. 1, 2003, pp. 1-43, XP015035676, ISSN: 0000-0004.

Supplementary European Search Report for European Application No. 07816106, dated Jun. 18, 2012.

Supplementary European Search Report for European Application No. 07816106, dated Nov. 2, 2012.

Wikipedia, "International mobile subscriber identity (IMSI)," http://en.wikipedia.org/wiki/IMSI, Jul. 16, 2013.

Wikipedia, "Roaming," http://en.wikipedia.org/wiki/Roaming, Jul. 16, 2013.

Document Title: Complaint for Patent Infringement [Jury Demand]; Case Title: *Voip-Pal.com, Inc., a Nevada corporation*, Plaintiff, v. *Verizon Wireless Services, LLC, a Delaware limited liability corporation; Verizon Communications, Inc., a Delaware corporation; AT&T, Inc., a Delaware corporation; AT&T Corp., a Delaware corporation; and Does I through X*, inclusive, Defendants; Case No: 2:16-CV-00271; Court: United States District Court District of Nevada. Attachments: Table of Exhibits; Exhibit A; Exhibit B; Exhibit C; Exhibit D; Exhibit E; Chart 1 to Exhibit E; Chart 2 to Exhibit E; Chart 3 to Exhibit E; Chart 4 to Exhibit E; Chart 5 to Exhibit E; Chart 6 to Exhibit E; Exhibit F; Chart 1 to Exhibit F; Chart 2 to Exhibit F; Chart 3 to Exhibit F; Chart 4 to Exhibit F; Chart 5 to Exhibit F; Chart 6 to Exhibit F; Exhibit G; Exhibit H; and Addendum 1 to Exhibit H.

Document Title: Complaint for Patent Infringement [Jury Demand] ; Case Title: *Voip-Pal.com, INC., a Nevada corporation*, Plaintiff, v. *Apple, Inc., a California corporation*; Defendants; Case No: 2:16-CV-00260; Court: United States District Court District of Nevada. Attachments: Table of Exhibits; Exhibit A; Exhibit B; Exhibit C; Exhibit D; Chart 1 to Exhibit D; Chart 2 to Exhibit D; Chart 3 to Exhibit D; Chart 4 to Exhibit D; Exhibit E; Exhibit F; and Addendum 1 to Exhibit F.

Letter dated Nov. 30, 2015, from VoIP-Pal.com Inc. giving notice and inviting the company listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. Sent to the following company: Apple Inc. In the U.S.

Letter dated Dec. 1, 2015, from VoIP-Pal.com Inc. giving notice and inviting the company listed herein below to contact VoIP-Pal.com about U.S. Pat Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. Sent to the following company; Verizon Communications in the U.S.

Letters dated December 18, 2015, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Airtel in India; Alcatel-Lucent in France; Avaya Inc. In the U.S.; AT&T in the U.S.; Blackberry in Canada; Cable One in the U.S.; CenturyLink in the U.S.; Charter Communications in the U.S.; Cisco Systems in the U.S.; Comcast in the U.S.; Cox Communications in the U.S.; Cricket Wireless in the U.S.; Facebook in the U.S.; Freedom Pop in the U.S.; Frontier Communications in the U.S.; Google Inc. in the U.S.; HP in the U.S.; Juniper Networks in the U.S.; LoopPay, Inc. in the U.S.; Magic Jack in the U.S.; MetroPCS in the U.S.; Ooma in the U.S.; PayPal in the U.S.; Republic Wireless in the U.S.; Rok Mobile in the U.S.; Samsung Electronics—America in the U.S.; ShoreTel, Inc. in the U.S.; Siemens in Germany; Skype Usa in the U.S.; Sprint in the U.S.; Square Cash in the U.S.; Suddenlink Communications in the U.S.; Talktone in the U.S.; Tango in the U.S.; Time Warner Cable in the U.S.; 1-Mobile in the U.S.; Twitter in the U.S.; US Cellular in the U.S.; Venmo in the U.S.; Virgin Mobile USA in the U.S.; Vodafone in the UK; and Vonage in the U.S.

Letters dated Jan. 4, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Rogers Communications Inc. in Canada; Shaw Cable in Canada; Walmart in Alaska; and WIND Mobile in Canada.

Letters dated Jan. 21, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Alibaba (China) Co., Ltd in China; Comwave Telecommunications in Canada; and Intel in the U.S.

Letters dated Feb. 2, 2016, from VoIP-Pal.com Inc. giving notice and inviting the companies listed herein below to contact VoIP-Pal.com about U.S. Pat. Nos. 9,179,005 and 8,542,815 and related patents listed in the accompanying Attachment A. (Please Note: Attachment A is attached here only to the first letter.) Sent to the following companies: Netflix Inc. in the U.S.; Skype Technologies in the U.S.; and WhatsApp Inc. in the U.S.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. TBD, U.S. Pat. No. 9,179,005; Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; Dated Jun. 15, 2016. 70 sheets.

Document Title: In the United States Patent and Trademark Office; Petition for Inter Partes Review Pursuant to 37 C.F.R. §42.100 ET SEQ.; In re U.S. Pat. No. 9,179,005; Currently in Litigation Styled: *VoIP-Pal.com, Inc.* v. *Apple Inc.*, Case No: 2:16-cv-00260-RFB-VCF; Issued: Nov. 3, 2015; Application Filed: Aug. 13, 2013; Applicant: Clay Perreault, et al.; Title: Producing Routing Messages for Voice Over IP Communications; Declaration of Henry H. Houh, PhD; Signed Jun. 14, 2016. 143 sheets.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *VoIP-Pal.com Inc.*, Patent Owner; Case No. TBD, U.S. Pat. No. 8,542,815; Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; Dated Jun. 15, 2016. 67 sheets.

Document Title: In the United States Patent and Trademark Office; Petition for Inter Partes Review Pursuant to 37 C.F.R. §42.100 ET SEQ.; In re U.S. Pat. No. 8,542,815; Currently in Litigation Styled: *VoIP-Pal.com, Inc.* v. *Apple Inc.*, Case No: 2:16-cv-00260-RFB-VCF; Issued: Sep. 24, 2013; Application Filed: Nov. 1, 2007; Applicant: Clay Perreault, et al.; Title: Producing Routing Messages for Voice Over IP Communications; Declaration of Henry H. Houh, PhD; Signed Jun. 14, 2016, 143 sheets.

Document Title: Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner; IPR2016-01082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Dated May 24, 2016. 64 sheets.

Document Title: Declaration of Michael Caloyannides; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Unified Patents Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner; IPR2016-01082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Signed May 23, 2016; Filed May 24, 2016, 84 sheets.

Document Title: Public Switched Telephone Networks: A Network Analysis of Emerging Networks; Daniel Livengood, Jijun Lin and Chintan Vaishnav; Engineering Systems Division; Massachusetts Institute of Technology; Submitted May 16, 2006; To Dan Whitney, Joel Moses and Chris Magee. 27 sheets.

Document Title: A Brief History of VoIP; Document One—The Past; Joe Hallock; joe@sitedifference.com; date on cover page Nov. 26, 2004; Evolution and Trends in Digital Media Technologies—COM 538; Masters of Communication in Digital Media; University of Washington. 17 sheets.

Document Title: Petitioner's Voluntary Interrogatory Responses; United States Patent and Trademark Office; Before the Patent Trial

(56) **References Cited**

OTHER PUBLICATIONS

and Appeal Board; *Unified Patents Inc*., Petitioner v. *Voip-Pal.com Inc*., Patent Owner; IPR20161082; U.S. Pat. No. 8,542,815; Producing Routing Messages for Voice Over IP Communications; Signed and Filed not later than May 24, 2016. 8 sheets.

Document Title: VoIP-Pal, The World is Calling!, "Over $7 Billion in Lawsuits File by *Voip-Pal.com Inc*. vs *Apple, Verizon and AT&T* for Various Patent Infringements," *Business Wire®, A Berkshire Hathaway Company*, Feb. 11, 2016. 2 sheets.

Technical Report, "3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Study into routeing of MT-SMs via the HPLMN (Release 7)," *3GPP TR 23.840* V0.1.0 (Feb. 2006), 13 pages.

European Examination Report dated Nov. 26, 2015 for European Patent Application No. EP 07 816 106.4.

Canadian Office Action dated Nov. 18, 2015 for Canadian Patent Application No. CA 2,681,984.

Canadian Office Action dated Dec. 1, 2015 for Canadian Patent Application No. CA 2,812,174,.

Canadian Office Action dated Jan. 22, 2016 for Canadian Patent Application No. CA 2,916,220.

Canadian Office Action dated Mar. 3, 2016 for Canadian Patent Application No. CA 2,670,510.

Canadian Office Action dated Jun. 8, 2016 for Canadian Patent Application No. CA 2,916,217,.

First Examination Report dated Dec. 9, 2015, India Patent Application No. 1047/MUMNP/2009.

Communication for European Patent Application No. EP 07 816 106.4—Invitation pursuant to Article 94(3) and Rule 71(1) EPC dated Apr. 15, 2016. All pages.

Communication under Rule 71(3) EPS—Intention to Grant—dated Oct. 14, 2016 for European Patent Application No. EP 07 816 106.4.

Canadian Office Action dated Aug. 16, 2016 for Canadian Patent Application No. CA 2,681,984.

Canadian Office Action dated Mar. 31, 2017 for Canadian Patent Application No. CA 2,916,220.

Patent Owner Response to Petition, *Apple Inc*., Petitioner, v. *Voip-Pal.com, Inc*., Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 76 pages.

Patent Owner Updated Exhibit List, *Apple Inc*., Petitioner, v. *Voip-Pal.com, Inc*., Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 6 pages.

Voip-Pal Ex. 2002, IPR2016-01201, "Declaration of Ryan Thomas in Support of Pro Hac Vice Motion," *Apple Inc*., Petitioner, v. *Voip-Pal.com, Inc*., Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 20, 2017, 4 pages.

Voip-Pal Ex. 2003, IPR2016-01201, "Technical Review of Digifonica VoIP System," Digifonica, Global Telephone Solutions, Author: John Rutter, Stuart Gare, Version V0.7 (Draft), Date: May 7, 2005, 35 pages.

Voip-Pal Ex. 2004, IPR2016-01201, Memo—"Subject; Smart 421 Contract signed and Faxed," From: Clay S. Perreault, Date: Jun. 6, 2005, 8:53 AM, to: Steve Nicholson, et al., 2 pages.

Voip-Pal Ex. 2005, IPR2016-01201, Memo—"Subject: Digifonica TEchnology review," From: Clay Perreault, Date: Jun. 6, 2005, 5:37 PM; To: John Rutter, et al., 5 pages.

Voip-Pal Ex. 2006, IPR2016-01201, Memo—"Subject: Re: Sample code for review Next document upload complete," From: Clay Perreault, Date: Jun. 15, 2005, 3:28 PM, To: John Rutter, et al., 3 pages.

Voip-Pal Ex. 2007, IPR2016-01201, DigiFonica International Inc Memo—"[Fwd: Digifonica Technical Review—draft report]," From Clay Perreault, To: Rod Thomson, et al., Tue, Jul. 5, 2005 at 4:45 PM, 2 pages.

Voip-Pal Ex. 2008, IPR2016-01201, John Rutter—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc*., Petitioner, v. *Voip-Pal.com, Inc*., Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 4 pages.

Voip-Pal Ex. 2009, IPR2016-01201, Stuart Gare—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc*., Petitioner, v. *Voip-Pal.com, Inc*., Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 2, 2017, 4 pages.

Voip-Pal Ex. 2010, IPR2016-01201, Pentti Kalevi Huttunen - "Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc*., Petitioner, v. *Voip-Pal.com, Inc*., Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 3, 2017, 4 pages.

Voip-Pal Ex. 2011, IPR2016-01201, Ryan Purita—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc*., Petitioner, v. *Voip-Pal.com, Inc*., Patent Owner, Case No, IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 3 pages.

Voip-Pal Ex, 2012, IPR2016-01201, Johan Emil Viktor Björsell—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc*., Petitioner, v. *Voip-Pal.com, Inc*., Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 9, 2017, 9 pages.

Voip-Pal Ex. 2013, IPR2016-01201, Clay Perreault—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc*., Petitioner, v. *Voip-Pal.com, Inc*., Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 6 pages.

Voip-Pal Ex. 2014, IPR2016-01201, RBR Source Code, Version 361, "call_e164.class.php RBR Version 361, Jun. 6, 2005 09:22:59," 45 pages.

Voip-Pal Ex. 2015, IPR2016-01201, RBR Source Code Log for Trunk Directory, "r1879 | cdelalande | Oct. 31, 2006 17:07:46—0800 (Tue, Oct. 31, 2006) | 3 lines," 56 pages.

Voip-Pal Ex. 2016. IPR2016-01201, William Henry Mangione-Smith—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc*., Petitioner, v. *Voip-Pal.com, Inc*., Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 10, 2017, 82 pages.

Voip-Pal Ex. 2017, IPR2016-01201, DF DigiFonica International Inc Memo—"notes from your presentation, 1 message" From Konstantin Kropivny, To: Emil Björsell, Tue, Jun. 14, 2005 at 7:33PM, 4 pages.

Voip-Pal Ex. 2018, IPR2016-01201, David Terry—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc*., Petitioner, v. *Voip-Pal.com, Inc*., Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 5 pages.

Voip-Pal Ex. 2019, IPR2016-01201, DF DigiFonica International Inc Memo—"Software release 10:30 am PST—11:00am PST for Aug. 25, 2005. 1 message" From Samantha Edwards, To: everyone@digifonica.com, Wed., Aug. 24, 2005 at 4:02 PM, 8 pages.

Voip-Pal Ex. 2020, IPR2016-01201, "Next Generation Networks—A Migration Path Digifonica Voice Over IP Technologies. Technology Overview, Draft Jun. 3, 2005, Not for Distribution," by Clay S Perreault, CEO / CTO, Digifonica International Ltd, Gibraltar, 45 pages.

Voip-Pal Ex. 2021, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.::Salm Rev 341, RBR Rev 341 added, 1 message" Fuad A. To: E. Björsell, Tue, May 31, 2005 at 1:13 PM, 1 page.

(56) **References Cited**

OTHER PUBLICATIONS

Voip-Pal Ex. 2022, IPR2016-01201, DF DigiFonica International Inc Memo—"Salm Rev 341, RBR Rev 341, 2 messages" Emil Björsell To: Fuad, et al., Tue, May 31, 2005 at 2:38 and 2:44 PM, 1 page.
Voip-Pal Ex. 2023, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.::RBR Roll out Rev 353 added, 1 message" Fuad A. To: E. Björsell, Thu, Jun. 2, 2005 at 1:12 PM, 1 page.
Voip-Pal Ex. 2024, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.::RBR Roll out Rev 358 added, 1 message" Fuad A. To: E. Björsell, Sun, Jun. 5, 2005 at 1:18 PM, 1 page.
Voip-Pal Ex. 2025, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.::RBR Roll out Rev 361 updated, 1 message" Fuad A. To: E. Björsell, Mon., Jun. 6, 2005 at 9:26 AM, 1 page.
Voip-Pal Ex. 2026, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 361, 1 message" David Terry To: Fuad, et al., Mon., Jun. 6, 2005 at 9:33 AM, 1 page.
Voip-Pal Ex. 2027, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 361, 1 message" Emil Björsell To: Fuad, et al., Mon., Jun. 6, 2005 at 11:33 AM, 1 page.
Voip-Pal Ex. 2030, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.::RBR Rev 541 updated, 1 message" Fuad A. To: E. Björsell, Thu, Aug. 4, 2005 at 11:57 AM, 1 page.
Voip-Pal Ex. 2031, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Rev 541, 1 message" David Terry To: Fuad, et al., Thu, Aug. 4, 2005 at 1:58 PM, 1 page.
Voip-Pal Ex. 2032, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Rev 541, 1 message" Emil Björsell To: Fuad, et al., Thu, Aug. 4, 2005 at 3:59 PM, 1 page.
Voip-Pal Ex. 2033, IPR2016-01201, DF DigiFonica International Inc Memo—"Software roll out for supernodes.::RBR Roll out Rev 554 added, 1 message" Fuad A. To: Emil Björsell, Mon, Aug. 8, 2005 at 10:55 AM, 1 page.
Voip-Pal Ex. 2034, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 2 messages" David Terry To: Fuad, et al., Mon, Aug. 8, 2005 at 11:48 AM and 12:00 PM, 1 page.
Voip-Pal Ex. 2035, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 1 message" Emil Björsell To: Fuad, et al., Mon, Aug. 8, 2005 at 12:09 PM, 1 page.
Voip-Pal Ex. 2036, IPR2016-01201, DF DigiFonica International Inc Memo—"Digifonica : RBR and Salma Deployment," Samantha Edwards To: everyone@digifonica.com, Mon, Aug. 8, 2005 at 4:12 PM, 4 pages.
Voip-Pal Ex. 2042, IPR2016-01201, DF DigiFonica International Inc Memo—"RBR Roll out Rev 693==>694, 1 message" Chris Huff To: Fuad, et al., Tue, Aug. 23, 2005 at 1:33 PM, 1 page.
Voip-Pal Ex. 2043, IPR2016-01201, "Deposition of Henry H. Houh, Ph.D., vol. I, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 25, 2017, 128 pages.
Voip-Pal Ex. 2044, IPR2016-01201, "Deposition of Henry H. Houh, Ph.D., vol. II, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 26, 2017, 158 pages.
Voip-Pal Ex. 2045, IPR2016-01201, Curriculum Vitae of William Henry Mangione-Smith, Ph.D., 23 pages.
Voip-Pal Ex. 2046, IPR2016-01201, U.S. Pat. No. 3,725,596, Issued Apr. 3, 1973, Rodney Robert Maxon et al., 18 pages.
Voip-Pal Ex. 2047, IPR2016-01201, "MERLIN® Communications System, Centrex/PBS Connection," Lucent Technologies, Bell Labs Innovations, © 1984 AT&T, 999-500-138 IS, Issue 1, Mar. 1985, 26 pages.
Voip-Pal Ex. 2048, IPR2016-01201, "Telephone Features," Quick Reference Guide, Definity, Rockefeller Group, Telecommunications Services, Inc., 2000, 2 pages.
Voip-Pal Ex. 2049, IPR2016-01201, Valdar, Andy, *Understanding Telecommunications Networks*, © 2006 The Institution of Engineering and Technology, London, UK, Title page, copyright page, pp. 38-39.
Voip-Pal Ex. 2050, IPR2016-01201, Horak, Ray, "Webster's New World® Telecom Dictionary," © 2008 by Wiley Publishing, Inc., Indianapolis, Indiana, Title page, copyright page, p. 133.
Patent Owner Response to Petition, *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 78 pages.
Patent Owner Updated Exhibit List, *Apple Inc.*, Petitioner, v. *Voip.Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Filed: Feb. 10, 2017, 6 pages.
Voip-Pal Ex. 2002, IPR2016-01198, "Declaration of Ryan Thomas in Support of Pro Hac Vice Motion," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 20, 2017, 4 pages.
Voip-Pal Ex. 2003, IPR2016-01198, "Technical Review of Digifonica VoIP System," Digifonica, Global Telephone Solutions, Author: John Rutter, Stuart Gare, Version V0,7 (Draft), Date: May 7, 2005, 35 pages.
Voip-Pal Ex. 2004, IPR2016-01198, Memo—"Subject: Smart 421 Contract signed and Faxed," From: Clay S. Perreault, Date: Jun. 6, 2005, 8:53 AM, To: Steve Nicholson, et al., 2 pages.
Voip-Pal Ex. 2005, IPR2016-01198, Memo—"Subject: Digifonica TEchnology review," From: Clay Perreault, Date: Jun. 6, 2005, 5:37 PM; To: John Rutter, et al., 5 pages.
Voip-Pal Ex. 2006, IPR2016-01198, Memo—"Subject: Re: Sample code for review Next document upload complete," From: Clay Perreault, Date: Jun. 15, 2005, 3:28 PM, To: John Rutter, et al., 3 pages.
Voip-Pal Ex. 2007, IPR2016-01198, DigiFonica International Inc Memo—"[Fwd: Digifonica Technical Review—draft report]," From Clay Perreault, To: Rod Thomson, et al., Tue, Jul. 5, 2005 at 4:45 PM, 2 pages.
Voip-Pal Ex. 2008, IPR2016-01198, John Rutter—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 4 pages.
Voip-Pal Ex. 2009, IPR2016-01198, Stuart Gare—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 2, 2017, 4 pages.
Voip-Pal Ex. 2010, IPR2016-01198, Pentti Kalevi Huttunen—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 3, 2017, 4 pages.
Voip-Pal Ex. 2011, IPR2016-01198, Ryan Purita—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 31, 2017, 3 pages.
Voip-Pal Ex. 2012, IPR2016-01198, Johan Emil Viktor Björsell—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 9, 2017, 9 pages.

(56) **References Cited**

OTHER PUBLICATIONS

Voip-Pal Ex. 2013, IPR2016-01198, Clay Perreault—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 6 pages.

Voip-Pal Ex. 2014, IPR2016-01198, RBR Source Code, Version 361, "call_e164.class.php RBR Version 361, Jun. 6, 2005 09:22:59," 45 pages.

Voip-Pal Ex. 2015, IPR2016-01198, RBR Source Code Log for Trunk Directory, "r1879 | cdelalande | Oct. 31, 2006 17:07:46—0800 (Tue, Oct. 31, 2006) | 3 lines," 56 pages.

Voip-Pal Ex. 2016, IPR2016-01198, William Henry Mangione-Smith—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 10, 2017, 96 pages.

Voip-Pal Ex. 2017, IPR2016-01198, DF DigiFonica International Inc Memo—"notes from your presentation, 1 message" From Konstantin Kropivny, To: Emil Björsell, Tue, Jun. 14, 2005 at 7:33PM, 4 pages.

Voip-Pal Ex. 2018, IPR2016-01198, David Terry—"Declaration in Support Patent Owner Response to Inter Partes Petition," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Feb. 8, 2017, 5 pages.

Voip-Pal Ex. 2019, IPR2016-01198, DF DigiFonica International Inc Memo—"Software release 10:30 am PST—11:00am PST for Aug. 25, 2005. 1 message" From Samantha Edwards, To: everyone@digifonica.com, Wed., Aug. 24, 2005 at 4:02 PM, 8 pages.

Voip-Pal Ex. 2020, IPR2016-01198, "Next Generation Networks—A Migration Path Digifonica Voice Over IP Technologies. Technology Overview, Draft Jun. 3, 2005, Not for Distribution," by Clay S Perreault, CEO / CTO, Digifonica International Ltd, Gibraltar, 45 pages.

Voip-Pal Ex. 2021, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.::Salm Rev 341, RBR Rev 341 added, 1 message" Fuad A. To: E. Björsell, Tue, May 31, 2005 at 1:13 PM, 1 page.

Voip-Pal Ex. 2022, IPR2016-01198, DF DigiFonica International Inc Memo—"Salm Rev 341, RBR Rev 341, 2 messages" Emil Björsell to: Fuad, et al., Tue, May 31, 2005 at 2:38 and 2:44 PM, 1 page.

Voip-Pal Ex. 2023, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.::RBR Roll out Rev 353 added, 1 message" Fuad A. To: E. Björsell, Thu, Jun. 2, 2005 at 1:12 PM, 1 page.

Voip-Pal Ex. 2024, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.::RBR Roll out Rev 358 added, 1 message" Fuad A. To: E. Björsell,. Sun, Jun. 5, 2005 at 1:18 PM, 1 page.

Voip-Pal Ex. 2025, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.::RBR Roll out Rev 361 updated, 1 message" Fuad A. To: E. Björsell, Mon., Jun. 6, 2005 at 9:26 AM, 1 page.

Voip-Pal Ex. 2026, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Roll out Rev 361, 1 message" David Terry To: Fuad, et al., Mon., Jun. 6, 2005 at 9:33 AM, 1 page.

Voip-Pal Ex. 2027, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Roll out Rev 361, 1 message" Emil Björsell to: Fuad, et al., Mon., Jun. 6, 2005 at 11:33 AM, 1 page.

Voip-Pal Ex. 2030, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.::RBR Rev 541 updated, 1 message" Fuad A. To: E. Björsell, Thu, Aug. 4, 2005 at 11:57 AM, 1 page.

Voip-Pal Ex. 2031, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Rev 541, 1 message" David Terry To: Fuad, et al., Thu, Aug. 4, 2005 at 1:58 PM, 1 page.

Voip-Pal Ex. 2032, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Rev 541, 1 message" Emil Björsell to: Fuad, et al., Thu, Aug. 4, 2005 at 3:59 PM, 1 page.

Voip-Pal Ex. 2033, IPR2016-01198, DF DigiFonica International Inc Memo—"Software roll out for supernodes.::RBR Roll out Rev 554 added, 1 message" Fuad A. To: Emil Björsell, Mon, Aug. 8, 2005 at 10:55 AM, 1 page.

Voip-Pal Ex. 2034, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 2 messages" David Terry To: Fuad, et al., Mon, Aug. 8, 2005 at 11:48 AM and 12:00 PM, 1 page.

Voip-Pal Ex. 2035, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Roll out Rev 554, 1 message" Emil Björsell to: Fuad, et al., Mon, Aug. 8, 2005 at 12:09 PM, 1 page.

Voip-Pal Ex. 2036, IPR2016-01198, DF DigiFonica International Inc Memo—"Digifonica : RBR and Salma Deployment," Samantha Edwards To: everyone@digifonica.com, Mon, Aug. 8, 2005 at 4:12 PM, 4 pages.

Voip-Pal Ex. 2042, IPR2016-01198, DF DigiFonica International Inc Memo—"RBR Roll out Rev 693==>694, 1 message" Chris Huff To: Fuad, et al., Tue, Aug. 23, 2005 at 1:33 PM, 1 page.

Voip-Pal Ex. 2043, IPR2016-01198, "Deposition of Henry H. Houh, Ph.D., vol. I, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 25, 2017, 128 pages.

Voip-Pal Ex. 2044, IPR2016-01198, "Deposition of Henry H. Hour, Ph.D., vol. II, Taken on Behalf of the Patent Owner," *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, Dated: Jan. 26, 2017, 158 pages.

Voip-Pal Ex. 2045, IPR2016-01198, Curriculum Vitae of William Henry Mangione-Smith, Ph.D., 23 pages.

Voip-Pal Ex. 2046, IPR2016-01198, U.S. Pat. No. 3,725,596, Issued Apr. 3, 1973, Rodney Robert Maxon et al., 18 pages.

Voip-Pal Ex. 2047, IPR2016-01198, "MERLIN® Communications System, Centrex/PBS Connection," Lucent Technologies, Bell Labs Innovations, © 1984 AT&T, 999-500-138 IS, Issue 1, Mar. 1985, 26 pages.

Voip-Pal Ex. 2048, IPR2016-01198, "Telephone Features," Quick Reference Guide, Definity, Rockefeller Group, Telecommunications Services, Inc., 2000, 2 pages.

Voip-Pal Ex. 2049, IPR2016-01198, Valdar, Andy, *Understanding Telecommunications Networks*,© 2006 The Institution of Engineering and Technology, London, UK, Title page, copyright page, pp. 38-39.

Voip-Pal Ex. 2050, IPR2016-01198, Horak, Ray, "Webster's New World® Telecom Dictionary," © 2008 by Wiley Publishing, Inc., Indianapolis, Indiana, Title page, copyright page, p. 133.

Canadian Office Action dated May 29, 2017 for Candian Patent Application No. CA 2,668,025.

Canadian Office Action dated Jun. 9, 2017 for Candian Patent Application No. CA 2,916,217.

European Examination Report dated May 12, 2017 for European Patent Application No. EP 09-802-316.1.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner; Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815; Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; Dated May 9, 2017, 63 pages.

Petitioner Apple Inc. Exhibit 1003, Case No, IPR2017-01399-815; U.S. Pat. No. 8,542,815: U.S. Pat. No. 7,486,684 to Chu, et al., 59 pages.

Petitioner Apple Inc. Exhibit 1004, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815: U.S. Pat. No. 6,760,324 to Scott, et al., 65 pages.

Petitioner Apple Inc. Exhibit 1005, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815: Declaration of Henry H. Hough, PhD, 45 pages.

(56) **References Cited**

OTHER PUBLICATIONS

Petitioner Apple Inc. Exhibit 1006, Case No. IPR2017-01399-815; U.S. Pat. No. 8,542,815: U.S. Publication No. 2002/0122547 to Hinchey et al., 21 pages.
Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc*., Petitioner v. *Patent of Voip-Pal.com Inc*., Patent Owner; Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005; Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; Dated May 9, 2017. 54 pages.
Petitioner Apple Inc. Exhibit 1006, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005: U.S. Pat. No. 7,486,684 to Chu, et al., 59 pages.
Petitioner Apple Inc. Exhibit 1007, Case 'No. IPR2017-01398-005; U.S. Pat. No. 9,179,005: U.S. Pat. No. 6,760,324 to Scott, et al., 65 pages.
Petitioner Apple Inc. Exhibit 1008, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005: Declaration of Henry H. Hough, PhD, 41 pages.
Petitioner Apple Inc. Exhibit 1009, Case No. IPR2017-01398-005; U.S. Pat. No. 9,179,005: U.S. Publication No. 2002/0122547 to Hinchey et al., 21 pages.
Document Title: In the United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc*., Petitioner v. *Digifonica* (*International*) Limited Patent Owner, Case No. IPR2017-01382; U.S. Pat. No. 8,542,815; Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; Dated May 8, 2017, 84 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc*., Petitioner v. *Digifonica* (*International*) Limited Patent Owner, U.S. Pat. No. 8,542,815, Inter Partes Review No. IPR2017-01382; Declaration of James Bress in Support of Petition for Inter Partes Review of U.S. Pat. No. 8,542,815; with Appendices a through II, 2113 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix A, James R. Bress, Curriculum Vitae, 26 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix B, Chapter 5, Telecommunications Essentials, Lillian Goleniewski, © 2002, 40 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix C, Chapter 11, Telecommunications Essentials, Lillian Goleniewski, © 2002, 41 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix D, ITU-T Recommendation E.164 (May 1997), 27 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix E, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 3-8-3-14, 9 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix F, Chapter 4, Telecommunications Essentials, Lillian Goleniewski, © 2002, pp. 99-100, 4 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix G, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 18-1-18-20, 22 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix H, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, Chapter 2, 32 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix I, Telecommunications Act of 1996, 104th Congress of the U.S.A., Jan. 1996, 128 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix J, Perspectives on the AIN Architecture, Berman et al., IEEE Communications Magazine, Feb. 1992, 6 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix K, U.S. Pat. No. 7,907,714 B2, to Baniak et al., 21 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix L, The IMS, Poikselka & Mayer, © 2009, John Wiley & Sons Ltd, Chapter 1 Introduction, 14 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix M, The IMS, Poikselkä & Mayer, @ 2009, John Wiley & Sons Ltd, pp. 24-25 and 86-94, 13 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix N, Chapter 9, Telecommunications Essentials, Lillian Goleniewski, © 2002, 42 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix O, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, pp. 238-239, 4 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix P, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, Chapter 4, pp. 67-86, 22 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix Q, Softswitch, Architecture for VoIP, Franklin D. Ohrtman, Jr., © 2003, Chapter 5, pp. 87-112, 28 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix R, Telecommunications Essentials, Lillian Goleniewski, © 2002, p. 221, 3 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix S, Network Working Group, RFC (Request for Comments): 1122, Internet Engineering Task Force, R. Braden, Ed., Oct. 1989, pp. 18-25, 9 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix T, RFC (Request for Comments): 791, Internet Protocol, DARPA Internet Program, Protocol Specification, Sep. 1981., by Information Sciences Institute, USC, 50 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix U, Network Working Group, RFC (Request for Comments): 1034, P. Mockapetris, ISI, Nov. 1987, pp. 1-55, 55 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No, IPR2017-01382; Appendix V, Network Working Group, RFC (Request for Comments): 1035, P. Mockapetris, ISI, Nov. 1987, pp. 1-55, 55 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix W, Network Working Group, RFC (Request for Comments): 3761, P. Faltstrom et al., Apr. 2004, pp. 1-18, 18 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix X, U.S. Pat. No. 6,594,254 B1, to Kelly, 18 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix Y, ITU-T Recommendation H.323 (Jul. 2003), 298 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix Z, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 6-306-6-309, 4 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix AA, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 14-10-14-13, 6 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix BB, The Internet Engineering Task Force (IETF®), May 5, 2017, 2 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix CC, Network Working Group, RFC (Request for Comments): 3261, J. Rosenberg et al., Jun. 2002, 269 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix DD, Network Working Group, RFC (Request for Comments): 3666, A. Johnston et al., Dec. 2003, 118 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix EE, Network Working Group, RFC (Request for Comments): 3665, A. Johnston et al., Dec. 2003, 94 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix FF, Network Working Group, RFC (Request for Comments): 2327, M. Handley et al., Apr. 1998, 42 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix GG, ITU-T Recommendation Q.931 (May 1998), 345 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix HH, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, pp. 14-76-14-77, 4 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, Case No. IPR2017-01382; Appendix II, Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, p. 10-7, 3 pages.

(56) **References Cited**

OTHER PUBLICATIONS

Petitioner AT&T Services, Inc. Exhibit 1004, Case No. IPR2017-01382; James R. Bress, Curriculum Vitae, 26 pages.
Petitioner AT&T Services, Inc. Exhibit 1005, Case No. IPR2017-01382; U.S. Pat. No. 6,240,449, Issued May 29, 2001 to Raymond Nadeau, 13 pages.
Petitioner AT&T Services, Inc. Exhibit 1006, Case No. IPR2017-01382; U.S. Pat. No. 6,594,254 B1, Issued Jul. 15, 2003 to Keith C. Kelly, 18 pages.
Petitioner AT&T Services, Inc. Exhibit 1007, Case No. IPR2017-01382; U.S. Pat. No. 7,715,413 B2, Issued May 11, 2010, to Vaziri et al., 53 pages.
Petitioner AT&T Services, Inc. Exhibit 1008, Case No. IPR2017-01382; Decision, Institution of Inter Partes Review, 37 C.F.R. § 42.108, Paper 6, Entered Nov. 21, 2016, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.com Inc.*, Patent Owner, Case IPR2016-01201, U.S. Pat. No. 8,542,815 B2, Before Barbara A. Benoit, Lynne E. Pettigrew, and Stacy B. Margolies, *Administrative Patent Judges*, 33 pages.
Petitioner AT&T Services, Inc. Exhibit 1009, Case No. IPR2017-01382; p. 221 and Chapter 11, Telecommunications Essentials, Lillian Goleniewski, © 2002, 44 pages.
Petitioner AT&T Services, Inc. Exhibit 1010, Case No. IPR2017-01382; RFC (Request for Comments): 791, Internet Protocol, DARPA Internet Program, Protocol Specification, Sep. 1981, by Information Sciences Institute, USC, 50 pages.
Petitioner AT&T Services, Inc. Exhibit 1011, Case No. IPR2017-01382; ITU-T Recommendation H.323 (Jul. 2003), 298 pages.
Petitioner AT&T Services, Inc. Exhibit 1012, Case No. IPR2017-01382; Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, p. 10-7, 3 pages.
Document Title: In the United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica* (*International*) Limited Patent Owner, Case No. IPR2017-01383; U.S. Pat. No. 9,179,005; Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; Dated May 8, 2017, 92 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica* (*International*) Limited Patent Owner, U.S. Pat. No. 9,179,005, Inter Partes Review No. IPR2017-01383; Declaration of James Bress in Support of Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; with Appendices A through II, 2094 pages. Appendices A through II are identical to those previously listed hereinabove as cite Nos. 25-59.
Petitioner AT&T Services, Inc. Exhibit 1004, Case No. IPR2017-01383; James R. Bress, Curriculum Vitae, 26 pages.
Petitioner AT&T Services, Inc. Exhibit 1005, Case No. IPR2017-01383; U.S. Pat. No. 6,240,449, Issued May 29, 2001 to Raymond Nadeau, 13 pages.
Petitioner AT&T Services, Inc. Exhibit 1006, Case No. IPR2017-01383; U.S. Publication No. 2004/0218748 A1, Published Nov. 4, 2004, by Stephen Fisher, 18 pages.
Petitioner AT&T Services, Inc. Exhibit 1007, Case No. IPR2017-01383; U.S. Pat. No. 6,594,254 B1, Issued Jul. 15, 2003, to Keith C. Kelly, 18 pages.
Petitioner AT&T Services, inc. Exhibit 1008, Case No. IPR2017-01383; U.S. Pat. No. 6,674,850 B2, Issued Jan. 6, 2004, to Vu et al., 10 pages.
Petitioner AT&T Services, Inc. Exhibit 1009, Case No. IPR2017-01383; Decision, Institution of Inter Partes Review, 37 C.F.R. § 42.108, Paper 6, Entered Nov. 21, 2016, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.com Inc.*, Patent Owner, Case IPR2016-01198, Patent 9,179,005 B2, Before Barbara A. Benoit, Lynne E. Pettigrew, and Stacy B. Margolies, *Administrative Patent Judges*, 32 pages.
Petitioner AT&T Services, Inc. Exhibit 1010, Case No. IPR2017-01383; Patent Owner Response to Petition, Filed Feb. 10, 2017, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, 78 pages.
Document Title: In the United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica* (*International*) Limited Patent Owner, Case No. IPR2017-01384; U.S. Pat. No. 9,179,005; Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; Dated May 7, 2017, 70 pages.
Petitioner AT&T Services, Inc. Exhibit 1003, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner v. *Digifonica* (*International*) Limited Patent Owner, U.S. Pat. No. 9,179,005, Inter Partes Review No. IPR2017-01384; Declaration of James Bress in Support of Petition for Inter Partes Review of U.S. Pat. No. 9,179,005; with Appendices A through II, 2085 pages. Appendices A through II are identical to those previously listed hereinabove as cite Nos. 25-59.
Petitioner AT&T Services, Inc. Exhibit 1004, Case No. IPR2017-01384; James R. Bress, Curriculum Vitae, 26 pages.
Petitioner AT&T Services, Inc. Exhibit 1005, Case No. IPR2017-01384; U.S. Pat. No. 6,240,449, Issued May 29, 2001 to Raymond Nadeau, 13 pages.
Petitioner AT&T Services, Inc. Exhibit 1006, Case No. IPR2017-01384; U.S. Pat. No. 6,594,254 B1, Issued Jul. 15, 2003, to Keith C. Kelly, 18 pages.
Petitioner AT&T Services, Inc. Exhibit 1007, Case No. IPR2017-01384; U.S. Pat. No. 7,715,413 B2, Issued May 11, 2010, to Vaziri et al., 53 pages.
Petitioner AT&T Services, Inc. Exhibit 1008, Case No. IPR2017-01384; Decision, Institution of Inter Partes Review, 37 C.F.R. § 42.108, Paper 6, Entered Nov. 21, 2016, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.com Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, Before Barbara A. Benoit, Lynne E. Pettigrew, and Stacy B. Margolies, *Administrative Patent Judges*, 32 pages.
Petitioner AT&T Services, Inc. Exhibit 1009, Case No. IPR2017-01384; p. 221 and Chapter 11, Telecommunications Essentials, Lillian Goleniewski, © 2002, 44 pages.
Petitioner AT&T Services, Inc. Exhibit 1010, Case No. IPR2017-01384; RFC (Request for Comments): 791, Internet Protocol, DARPA Internet Program, Protocol Specification, Sep. 1981, by Information Sciences Institute, USC, 50 pages.
Petitioner AT&T Services, Inc. Exhibit 1011, Case No. IPR2017-01384; ITU-T Recommendation H.323 (Jul. 2003), 298 pages.
Petitioner AT&T Services, Inc. Exhibit 1012, Case No. 1PR2017-01384; Telcordia Notes on the Networks, SR-2275, Issue 4, Oct. 2000, p. 10-7, 3 pages.
Document Title; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Petitioner's Reply to Patent Owner's Response, Dated May 17, 2017, 34 pages.
Petitioner Apple Inc. Exhibit 1007, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of William Henry Mangione-Smith, taken on Apr. 19, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 213 pages.
Petitioner Apple Inc. Exhibit 1008, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of John Rutter, taken (by phone) on Apr. 5, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 43 pages.
Petitioner Apple Inc. Exhibit 1009, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery DepoSition of David Terry, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 95 pages.

(56) **References Cited**

OTHER PUBLICATIONS

Petitioner Apple Inc. Exhibit 1010, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of Clay Perreault, taken on Apr. 12, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 118 pages.

Petitioner Apple Inc. Exhibit 1011, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Complaint for Patent Infringement [Jury Demand], United States District Court, District of Nevada, Case No. 2:16-CV-00260, *Voip-Pal.com, Inc., a Nevada corporation*, Plaintiff, v. *Apple, Inc., a California corporation*, Defendants, filed Feb. 9, 2016, 8 pages.

Petitioner Apple Inc. Exhibit 1012, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Discovery Deposition of Johan Emil Viktor Björsell, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 204 pages.

Petitioner Apple Inc. Exhibit 1013, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Letter dated Apr. 21, 2017 to Adam P. Seitz et al., ERISE IP, P.A., re: IPR2016-01198 & IPR1026-01201, "Pursuant to the Board Order of Apr. 19, 2017 (Paper 28) . . . " from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 1 page.

Petitioner Apple Inc. Exhibit 1014, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201; U.S. Pat. No. 8,542,815; Email dated May 1, 2017 to Adam P. Seitz et al., ERISE IP, P.A., re: IPR2016-01198 & IPR1026-01201—Fuad Arafa, from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 2 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Petitioner's Reply to Patent Owner's Response, Paper 34, Dated May 17, 2017, 33 pages.

Petitioner Apple Inc. Exhibit 1010, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of William Henry Mangione-Smith, taken on Apr. 19, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 213 pages.

Petitioner Apple Inc. Exhibit 1011, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of John Rutter, taken (by phone) on Apr. 5, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 43 pages.

Petitioner Apple Inc. Exhibit 1012, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of David Terry, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 95 pages.

Petitioner Apple Inc. Exhibit 1013, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of Clay Perreault, taken on Apr. 12, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 118 pages.

Petitioner Apple Inc. Exhibit 1014, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Complaint for Patent Infringement [Jury Demand], United States District Court, District of Nevada, Case No. 2:16-CV-00260, *Voip-Pal.Com, Inc., a Nevada corporation*, Plaintiff, v. *Apple, Inc., a California corporation*, Defendants, filed Feb. 9, 2016, 8 pages.

Petitioner Apple Inc, Exhibit 1015, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Discovery Deposition of Johan Emil Viktor Björsell, taken on Mar. 24, 2017 in Case No. IPR2016-01198; U.S. Pat. No. 9,179,005, 204 pages.

Petitioner Apple Inc. Exhibit 1016, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Letter dated Apr. 21, 2017 to Adam P. Seitz et al., ERISE IP, P.A., re: IPR2016-01198 & IPR1026-01201, "Pursuant to the Board Order of Apr. 19, 2017 (Paper 28) . . . " from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 1 page.

Petitioner Apple Inc. Exhibit 1017, United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198; U.S. Pat. No. 9,179,005; Email dated May 1, 2017 to Adam P. Seitz et al., ERISE IP, P.A., re: IPR2016-01198 & IPR1026-01201—Fuad Arafa, from Kerry Taylor, Knobbe, Martens, Olson & Bear, LLP, 2 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com.Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Patent Owner Objections to Apple Evidence Served With Petitioner's Reply, Filed on behalf of Patent Owner Voip-Pal.com Inc., Filed: May 24, 2017, 6 pages.

Document Title: United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner v. *Voip-Pal.com.Inc.*, Patent Owner, Case No, IPR2016-01198, U.S. Pat. No. 9,179,005; Patent Owner Objections to Apple Evidence Served With Petitioner's Reply, Filed on behalf of Patent Owner Voip-Pal.com Inc., Filed: May 24, 2017, 6 pages.

Petitioner's Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 4 pages.

Patent Owner Sur-Reply in Response to Petitioner's Reply, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 8 pages.

Patent Owner Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 4 pages.

Patent Owner Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, dated Jun. 14, 2017, 18 pages.

Voip-Pal Ex. 2052, IPR2016-01201, *Apple Inc.* vs. *Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 7, 2017, 16 sheets.

Petitioner's Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 4 pages.

Patent Owner Sur-Reply in Response to Petitioner's Reply, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 8 pages.

Patent Owner Request for Oral Argument, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 4 pages.

(56) **References Cited**

OTHER PUBLICATIONS

Patent Owner Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, dated Jun. 14, 2017, 18 pages.

Voip-Pal Ex. 2052, IPR2016-01198, *Apple Inc.* vs. *Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 7, 2017, 16 sheets.

Order, Conduct of Proceeding, 37 C.F.R. § 42.5, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.com Inc.*, Patent Owner, Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. Nos. 9,179,005 B2 and 8,542,815 B2, Paper No. 37, Filed: Jun. 13, 2017, 3 pages.

Voip-Pal Ex. 2053, IPR2016-01198, *Apple Inc.* vs. *Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 20, 2017, 25 pages.

Voip-Pal Ex. 2053, IPR2016-01201, *Apple Inc.* vs. *Voip-Pal.com, Inc.*, Reporter's Transcript of Telephonic Hearing, Jun. 20, 2017, 25 pages.

Order, Conduct of Proceeding, 37 C.F.R. § 42.5, United States Patent and Trademark Office, Before the Patent Trail and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner. Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. Nos. 9,179,005 B2 and 8,542,815 B2, Paper No. 43, Filed: Jun. 22, 2017, 4 pages.

Order, Trial Hearing, 37 C.F.R. § 42.70, United States Patent and Trademark Office, Before the Patent Trail and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner. Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. Nos. 9,179,005 B2 and 8,542,815 B2, Paper No. 45, Filed: Jun. 26, 2017, 4 pages.

Petitioner's Opposition to Patent Owner's Motion to Exclude, Unted States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, Date: Jun. 26, 2017, 15 pages.

Petitioner's Opposition to Patent Owner's Motion to Exclude, Unted States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, Date: Jun. 26, 2017, 15 pages.

Patent Owner Reply to Opposition to Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR 2016-01198, U.S. Pat. No. 9,179,005, Filed: Jul. 3, 2017, 8 pages.

Patent Owner Reply to Opposition to Motion to Exclude, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR 2016-01201, U.S. Pat. No. 8,542,815, Filed: Jul. 3, 2017, 8 pages.

Voip-Pal Ex. 2054, IPR2016-01198, Voip-Pal's Demonstratives for Oral Hearing, *Apple Inc.* v. *Voip-Pal.com*, Inc., Case IPR2016-01201 (U.S. Pat. No. 8,542,815), Case IPR2016-01198 (U.S. Pat. No. 9,179,005), Jul. 20, 2017, 34 pages.

Voip-Pal Ex. 2054, IPR2016-01201, Voip-Pal's Demonstratives for Oral Hearing, *Apple Inc.* v. *Voip-Pal.com, Inc.*, Case IPR2016-01201 (U.S. Pat. No. 8,542,815), Case IPR2016-01198 (U.S. Pat. No. 9,179,005), Jul. 20, 2017, 34 pages.

Petitioner Apple Inc. Ex. 1018, Petitioner's Demonstrative Exhibits, Inter Partes Reviews, U.S. Pat. No. 9,179,005 & U.S. Pat. No. 8,542,815, Oral Argument, Jul. 20, 2017, *Apple Inc.* v. *Voip-Pal.com, Inc.*, Case IPR2016-01198; U.S. Pat. No. 9,179,005, Case IPR2016-01201; U.S. Pat. No. 8,542,815, 46 pages.

Decision: Denying Institution of Inter Partes Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Unified Patents Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner, Case IPR2016-01082, U.S. Pat. No. 8,542,815 B2, Paper 8, Entered: Nov. 18, 2016.

Decision: Institution of Inter Partes Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner, Case IPR2016-01201, U.S. Pat. No. 8,542,815 B2, Paper 6, Entered: Nov. 21, 2016.

Decision: Institution of Inter Partes Review, 37 C.F.R. § 42.108, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner, Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2, Paper 6, Entered: Nov. 21, 2016.

Scheduling Order: United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner v. *Voip-Pal.com Inc.*, Patent Owner, Cases IPR2016-01201, IPR2016-01198, U.S. Pat. No. 8,542,815 B2, U.S. Pat. No. 9,179,005 B2, Paper 7, Entered: Nov. 21, 2016.

Canadian Office Action dated Sep. 18, 2014 for Canadian Patent Application No. CA 2,670,510.

Canadian Office Action dated Aug. 18, 2015 for Canadian Patent Application No. CA 2,732,148.

Canadian Office Action dated Aug. 2, 2017 for Canadian Patent Application No. CA 2,681,984.

Indian Office Action dated Jun. 21, 2017 for Indian Patent Application No. IN 1227/MUMNP/2009.

Intimation of the grant and recordal of India Patent No. 287412 entitled "Producing Routing Messages for Voice Over IP Communications", dated Sep. 15, 2017, for India Patent Application. No. IN 1047/MUMNP/2009 filed Nov. 1, 2007.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *AT&T Services, Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2017-01382, U.S. Pat. No. 8,542,815, dated Aug. 24, 2017, 71 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *AT&T Services, Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2017-01383, U.S. Pat. No. 9,179,005, dated Aug. 24, 2017, 74 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *AT&T Services, Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2017-01384, U.S. Pat. No. 9,179,005, dated Aug. 24, 2017, 61 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner, Case No. IPR2017-01398, U.S. Pat. No. 9,179,005, dated Aug. 25, 2017, 76 pages.

Patent Owner's Preliminary Response to Petition for Inter Partes Review, United States Patent and Trademark Office, Before the Patent Trial and Appeal Board, *Apple Inc.*, Petitioner, v. *VoIP-Pal.com, Inc.*, Patent Owner, Case No. IPR2017-01399, U.S. Pat. No. 8,542,815, dated Aug. 25, 2017, 77 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com., Inc.* Patent Owner; Cases IPR2016-01198 and IPR2016-01201; U.S. Pat. Nos. 9,179,005 B2 and 8,542,815 B2; Record of Oral Hearing, Held: Jul. 20, 2017; Before Josiah C. Cocks, Jennifer Meyer Chagnon, and John A. Hudalla, *Administrative Patent Judges*, 83 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2; Final Written Decision; Paper 53, Entered: Nov. 20, 2017; 29 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case IPR2016-01201, U.S. Pat. No. 8,542,815 B2; Final Written Decision; Paper 54, Entered: Nov. 20, 2017; 29 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case IPR2017-01399, U.S. Pat. No. 8,542,815 B2; Decision: Denying Institution of Inter Partes Review; Paper No. 6, Entered: Nov. 20, 2017; 23 pages.

United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case IPR2017-01398, U.S. Pat. No. 9,179,005 B2;

(56) **References Cited**

OTHER PUBLICATIONS

Decision: Denying Institution of Inter Partes Review; Paper No. 6, Entered: Nov. 20, 2017; 23 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case IPR2017-01382, U.S. Pat. No. 8,542,815 B2; Decision: Denying Institution of Inter Partes Review; Paper No. 8, Entered: Nov. 20, 2017; 28 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case IPR2017-01383, U.S. Pat. No. 9,179,005 B2; Decision: Denying Institution of Inter Partes Review; Paper No. 8, Entered: Nov. 20, 2017; 43 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *AT&T Services, Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case IPR2017-01384, U.S. Pat. No. 9,179,005 B2; Decision: Denying Institution of Inter Partes Review; Paper No. 8, Entered: Nov. 20, 2017; 31 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Cases IPR2016-01198 and IPR2016-01201, U.S. Pat. Nos. 9,179,005 B2 and 8,542,815 B2; Order, Conduct of Proceeding, 37 C.F.R. § 42.5; Paper No. 54, Entered: Dec. 20, 2017; 4 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Petitioner's Motion for Entry of Judgment in Favor of Petitioner etc; Paper 55, Date: Dec. 20, 2017; 18 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Petitioner's Updated Exhibit List; Date: Dec. 22, 2017; 4 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Apple Exhibit 1019—Sep. 18, 2017 Voip-Pal Website advertising Dr. Sawyer's Letters; Date: Dec. 20, 2017; 1 page.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Apple Exhibit 1020—Sep. 2017 Voip-Pal Website posting and linking all of Dr. Sawyer's Letters; Date: Dec. 20, 2017; 2 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, vs. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005 B2 and Case No. IPR2016-01201, U.S. Pat. No. 8,542,815 B2; IPR2016-01201 Apple Exhibit 1021—Telephonic Hearing Before the Administrative Patent Judges: Dec. 19, 2017; 25 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Petitioner's Motion for Entry of Judgment in Favor of Petitioner etc; Date: Dec. 20, 2017; 18 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Petitioner's Updated Exhibit List; Date: Dec. 22, 2017; 4 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2; Apple Exhibit 1019—Sep. 18, 2017 Voip-Pal Website advertising Dr. Sawyer's Letters; Date: Dec. 20, 2017; 1 page.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case IPR2016-01198, U.S. Pat. No. 9,179,005 B2; Apple Exhibit 1020—Sep. 2017 Voip-Pal Website posting and linking all of Dr. Sawyer's Letters; Date: Dec. 20, 2017; 2 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, vs. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005 B2 and Case No. IPR2016-01201, U.S. Pat. No. 8,542,815 B2; IPR2016-01198 Apple Exhibit 1021—Telephonic Hearing Before the Administrative Patent Judges: Dec. 19, 2017; 25 pages.
Exhibit 3001 filed Dec. 20, 2017—Letter from Ryan L. Thomas dated Dec. 19, 2017 re Representation of VoIP-Pal.com, Inc. in Conference Call to the Administrative Patent Judges in re IPR2016-01198 and IPR-2016-01201; 1 page.
Exhibit 3002 filed Dec. 20, 2017—Email from Attorney Adam Seitz dated Dec. 15, 2017 to the Administrative Patent Judges in re IPR2016-01198 and IPR-2016-01201 re Authorization to File Motion for Sanctions; 1 page.
Exhibit 3003 filed Dec. 20, 2017—Letter from Dr. Thomas E. Sawyer (Shareholder) dated May 1, 2017 to PTAB Chief Judge David P. Ruschke in re IPR2016-01198 and IPR-2016-01201 re Review of Proceedings, 6 pages.
Exhibit 3004 filed Dec. 20, 2017—Letter from Dr. Thomas E. Sawyer (Shareholder) dated Jun. 21, 2017 to PTAB Chief Judge David P. Ruschke in re IPR2016-01198 and IPR-2016-01201 re Review of Proceedings, 3 pages.
Exhibit 3005 filed Dec. 20, 2017—Letter from Dr. Thomas E. Sawyer (Shareholder) dated Jul. 11, 2017 to PTAB Chief Judge David P. Ruschke in re IPR2016-01198 and IPR-2016-01201 re Review of Proceedings, 5 pages.
Exhibit 3006 filed Dec. 20, 2017—Letter from Dr. Thomas E. Sawyer (Shareholder) dated Jul. 27, 2017 to the Secretary of the Department of Commerce Hon. Wilbur Ross et al. in re IPR2016-01198 and IPR-2016-01201 re Review of Proceedings, 6 pages.
Exhibit 3007 filed Dec. 20, 2017—Letter from Dr. Thomas E. Sawyer (Shareholder) dated Aug. 31, 2017 to the Secretary of the Department of Commerce Hon. Wilbur Ross in re IPR2016-01198 and IPR-2016-01201 re Review of Proceedings, 8 pages.
Exhibit 3008 filed Dec. 20, 2017—Letter from Dr. Thomas E. Sawyer (Shareholder) dated Oct. 23, 2017 to the PTAB Chief Judge David P. Ruschke et al. in re IPR2016-01198 and IPR-2016-01201 re Review of Proceedings, 10 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Patent Owner's Opposition to Apple's Motion for Sanctions Pursuant to Board Order of Dec. 20, 2017; Filed: Jan. 12, 2018; 17 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Patent Owner's Updated Exhibit List; Filed: Jan. 12, 2018; 9 pages.
Voip-Pal Exhibit 2056, IPR2016-01198; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Declaration in Support of Patent Owner's Opposition to Motion for Sanctions; Dated: Jan. 12, 2018; 12 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Patent Owner's Opposition to Apple's Motion for Sanctions Pursuant to Board Order of Dec. 20, 2017; Filed: Jan. 12, 2018; 17 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Patent Owner's Updated Exhibit List; Filed: Jan. 12, 2018; 9 pages.
Voip-Pal Exhibit 2056, IPR2016-01198; United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Declaration in Support of Patent Owner's Opposition to Motion for Sanctions; Dated: Jan. 12, 2018; 12 pages.
Voip-Pal Exhibit 2057; IPR2016-01198 and IPR2016-01201; Declaration of Adam R. Knecht, ESQ. Regarding Notice of Various Letters From Dr. Thomas Sawyer to the Honorable Judge Richard

(56) **References Cited**

OTHER PUBLICATIONS

F. Boulware II (ECF Nos. 28 and 32); including Exhibit A (7 pages), Exhibit B (19 pages) and Exhibit C (12 pages); Executed on Dec. 18, 2017; 40 pages.
Voip-Pal Exhibit 2058; IPR2016-01198 and IPR2016-01201; O'Brien et al., "Revealed: Federal Judges Guilty of Owning Stock in Corporations They Ruled On," Occupy.com(May 1, 2014,) 11 pages.
Voip-Pal Exhibit 2059; IPR2016-01198 and IPR2016-01201; Letter dated Aug. 7, 2013 from Kathryn Siehndel, USPTO FOIA Officer, , Re: Freedom of Information Act (FOIA) Request No. F-13-00218 concerning U.S. Pat. No. 7,139,761; 77 pages.
Voip-Pal Exhibit 2060; IPR2016-01198 and IPR2016-01201; Questionnaire for Non-Judicial Nominees; Affidavit executed by Michelle K. Lee Oct. 28, 2014; 40 pages.
Voip-Pal Exhibit 2061; IPR2016-01198 and IPR2016-01201; Davis, R., "PTAB's 'Death Squad' Label Not Totally Off-Base, Chief Says," *Law360*, New York (Aug. 14, 2014) 4 pages.
Voip-Pal Exhibit 2062; IPR2016-01198 and IPR2016-01201; Graham et al., "The Brainy Bunch," *Intellectual Property: An ALM Supplement*, Fall 2015, 7 pages.
Voip-Pal Exhibit 2063; IPR2016-01198 and IPR2016-01201; Patent Trial and Appeal Board Statistics, *USPTO*, Jan. 31, 2017, 15 pages.
Voip-Pal Exhibit 2064; IPR2016-01198 and IPR2016-01201; Davis, R., "Fed. Circ. Reverses PTAB Nix of Synopsys Circuit Patent," *Law360*, New York, Apr. 24, 2017, 5 pages.
Voip-Pal Exhibit 2065; IPR2016-01198 and IPR2016-01201; Scheller et al. "Federal Circuit to PTAB: No Short Cuts Allowed," *The National Law Review*; Apr. 25, 2017, 5 pages.
Voip-Pal Exhibit 2066; IPR2016-01198 and IPR2016-01201; Couturier, K. "How Europe Is Going After Apple, Google and Other U.S. Tech Giants," *New York Times*, Apr. 13, 2015, 1 page.
Voip-Pal Exhibit 2067; IPR2016-01198 and IPR2016-01201; Manjoo, F., "Tech Giants Seem Invincible. That Worries Lawmakers." *New York Times*, Jan. 4, 2017, 5 pages.
Voip-Pal Exhibit 2068; IPR2016-01198 and IPR2016-01201; Quinn et al., "Michelle Lee's views on patent quality out of touch with reality facing patent applicants," *IPWatchdog*®,Feb. 2, 2017, 5 pages.
Voip-Pal Exhibit 2069; IPR2016-01198 and IPR2016-01201; Quinn, G., "Michelle Lee launches PTAB initiative to 'shape and improve' IPR proceedings," *IPWatchdog*®, Apr. 10, 2017, 3 pages.
Voip-Pal Exhibit 2070; IPR2016-01198 and IPR2016-01201; Kampis, J., "Google employees have enjoyed revolving door during Obama administration," watchdog.org, Aug. 8, 2016, 6 pages.
Voip-Pal Exhibit 2071; IPR2016-01198 and IPR2016-01201; Dayen, D., "The Android Administration," *The Intercept_*, Apr. 22, 2016, 16 pages.
Voip-Pal Exhibit 2072; IPR2016-01198 and IPR2016-01201; Editor Charlie, "@scleland: How Google Is Anti-employment Anti-property & Pro-regulation," *Artist Rights Watch, News for the Artist Rights Advocacy Community*, Nov. 18, 2016, 3 pages.
Voip-Pal Exhibit 2073; IPR2016-01198 and IPR2016-01201; Press Release: "Voip-Pal Issues a Correction to its Press Release of Sep. 18, 2017," *Voip-Pal.Com Inc*., Jan. 11, 2018, 1 page.
Voip-Pal Exhibit 2074; IPR2016-01198 and IPR2016-01201; "Former head of Google patent strategy appointed to run U.S. patent agency," *ai (/Profile/12836/AppleInsider)*, Dec. 12, 2013, 8 pages.
Voip-Pal Exhibit 2075; IPR2016-01198 and IPR2016-01201; Vermont, S. "IPR Statistics Revisited: Yep, It's a Patent Killing Field," PatentAttorney.com, Feb. 8, 2017, 9 pages.
Voip-Pal Exhibit 2076; IPR2016-01198 and IPR2016-01201; Sterne et al., "PTAB Death Squads: Are All Commercially Viable Patents Invalid?" *IPWatchdog*®, Mar. 24, 2014, 5 pages.
Voip-Pal Exhibit 2077; IPR2016-01198 and IPR2016-01201; Sheafe, B., "Dear Congress: A Small Request on Behalf of the Innovators You (Theoretically) Represent: Part 2," *IPWire*, Jan. 12, 2018, 5 pages.
Voip-Pal Exhibit 2078; IPR2016-01198 and IPR2016-01201; Brachmann, S., "Are conflicts of interest at the PTAB leading to preferential decisions for Apple?" *IPWatchdog*®, Apr. 28, 2017, 5 pages.
Voip-Pal Exhibit 2079; IPR2016-01198 and IPR2016-01201; Quinn et al., "Patent owners do not like IPRs despite what Bloomberg Law, AIPLA study says," *IPWatchdog*®, Feb. 6, 2017, 5 pages.
Voip-Pal Exhibit 2080; IPR2016-01198 and IPR2016-01201; "Does Google's Michelle Lee Work for Both Google and the U.S. Patent Office at the Same Time?" *The Corruption Times, Your Public New WIKI for Social Updates*Apr. 6, 2016, 8 pages.
Voip-Pal Exhibit 2081; IPR2016-01198 and IPR2016-01201; Morinville, P., "The Senate Must Vet Vishal Amin," *IPWatchdog*®, Apr. 23, 2017, 4 pages.
Voip-Pal Exhibit 2082; IPR2016-01198 and IPR2016-01201; The New York Times "May 15, 1911, Supreme Court Orders Standard Oil to Be Broken Up," By the Learning Network, May 15, 2012, 3 pages.
Voip-Pal Exhibit 2083; IPR2016-01198 and IPR2016-01201; Simpson et al., "PTAB Kill Rates: How IPRs Are Affecting Patents," *Law360*, New York, Sep. 15, 2015, 6 pages.
Voip-Pal Exhibit 2084; IPR2016-01198 and IPR2016-01201; Vermont, S., "IPR Statistics Revisited: Yep, It's a Patent Killing Field," PatentAttorney.com, Feb. 8, 2017, 9 pages.
Voip-Pal Exhibit 2085; IPR2016-01198 and IPR2016-01201; Robinson, E., "Why the Unified Patents Model Would Not Work in China," *IPWatchdog*®, Apr. 26, 2017, 4 pages.
Voip-Pal Exhibit 2086; IPR2016-01198 and IPR2016-01201; Brachmann et al., "US Inventor sets patents on fire as part of PTAB protest at USPTO," *IPWatchdog*®, Aug. 11, 2017, 4 pages.
Voip-Pal Exhibit 2087; IPR2016-01198 and IPR2016-01201; "Selection process for assigning judges to expanded PTAB panels," *717 Madison Place*, Aug. 28, 2017, 3 pages.
Voip-Pal Exhibit 2088; IPR2016-01198 and IPR2016-01201; Eden, S., "How the U.S. Patent Office Got So Screwed Up," *Popular Mechanics*, Jun. 21, 2016, 21 pages.
Voip-Pal Exhibit 2089; IPR2016-01198 and IPR2016-01201; Quinn, G., "Supreme Court to decide if Inter Partes Review is Unconstitutional," *IPWatchdog*®, Jun. 12, 2017, 4 pages.
Voip-Pal Exhibit 2090; IPR2016-01198 and IPR2016-01201; Quinn, G., "Industry reaction to SCOTUS patent venue decision in *TC Heartland* v. *Kraft Food Group," IPWatchdog*®, May 22, 2017, 7 pages.
Voip-Pal Exhibit 2091; IPR2016-01198 and IPR2016-01201; Flibbert et al., "5 Distinctions Between IPRs and District Court Patent Litigation," *Finnegan*, Dec. 16, 2015, 6 pages.
Voip-Pal Exhibit 2092; IPR2016-01198 and IPR2016-01201; "2404. Hobbs Act—Under Color of Official Right," *USAM*, Department of Justice, downloaded on Jan. 12, 2018, 5 pages.
Voip-Pal Exhibit 2093; IPR2016-01198 and IPR2016-01201; "Selection process for assigning judges to expanded PTAB panels," *717 Madison Place*, Aug. 28, 2017, 3 pages.
Voip-Pal Exhibit 2094; IPR2016-01198 and IPR2016-01201; "2015 Summary of Ethics Rules," *Economic Development Administration*, U.S. Department of Commerce, 16 pages.
Voip-Pal Exhibit 2095; IPR2016-01198 and IPR2016-01201; "Patent Trial and Appeal Board Statistics," United States Patent and Trademark Office, *USPTO*, Mar. 31, 2017, 15 pages.
Voip-Pal Exhibit 2096; IPR2016-01198 and IPR2016-01201; Madigan et al., "Turning Gold to Lead: How Patent Eligibility Doctrine is Undermining U.S. Leadership in Innovation," *George Mason Law & Economics Research Paper No. 17-16*, Mar. 30, 2017, 21 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc*., Petitioner, v. *Voip-Pal.com, Inc*., Patent Owner; Cases IPR2016-01198 and IPR2016-01201, U.S. Pat Nos. 9,179,005 B2 and 8,542,815 B2; Order, Conduct of Proceeding, 37 C.F.R. § 42.5, for both proceedings; Paper No. 62, Entered: Jan. 19, 2018, 4 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc*., Petitioner, v. *Voip-Pal.com, Inc*., Patent Owner; IPR2016-01198, U.S. Pat. No. 9,179,005; Notice of Appeal, Dated: Jan. 22, 2018, 5 pages.

(56) **References Cited**

OTHER PUBLICATIONS

Apple Exhibit 1022, IPR2016-01198, Telephonic Hearing Before the Administrative Patent Judges; Jan. 19, 2018; 14 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; IPR2016-01201, U.S. Pat. No. 8,542,815; Notice of Appeal, Dated: Jan. 22, 2018, 5 pages.
Apple Exhibit 1022, IPR2016-01201, Telephonic Hearing Before the Administrative Patent Judges; Jan. 19, 2018; 14 pages.
Case: 18-1456; Document: 1-1; Filed: Jan. 23, 2018, 1 page. United States Court of Appeals for the Federal Circuit; Notice of Docketing; 18-1456—*Apple Inc.* v. *Voip-Pal.com, Inc.*; Date of Docketing: Jan. 23, 2018, IPR2016-01198; 1 page.
Case: 18-1456; Document: 1-2; Filed: Jan. 23, 2018, 34 pages United States Court of Appeals for the Federal Circuit; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; IPR2016-01198, U.S. Pat. No. 9,179,005; Notice of Appeal, (Dated: Jan. 22, 2018, 5 pages); with Paper 53; Entered: Nov. 20, 2017; Final Written Decision; 35 U.S.C. § 318(a) and 37 C.F.R. § 42.73; (29 pages).
Case: 18-1456; Document 6; Filed: Jan. 25, 2018; 14 pages: In the United States Court of Appeals for the Federal Circuit, *Apple Inc.*, Petitioner-Appellant, v. *Voip-Pal.com, Inc.*, Patent Owner-Appellee. On Appeal from the United States Patent and Trademark Office, Patent Trial and Appeal Board, in Case No. IPR2016-01198; Motion of Appellant Apple Inc. to Stay Appeal or for a Limited Remand to Allow Conclusion of Administrative Proceedings.
Case: 18-1457; Document: 1-1; Filed: Jan. 23, 2018, 1 page: United States Court of Appeals for the Federal Circuit; Notice of Docketing; 18-1457—*Apple Inc.* v. *Voip-Pal.com, Inc.*; Date of Docketing: Jan. 23, 2018, IPR2016-01201; 1 page.
Case: 18-1457; Document: 1-2; Filed: Jan. 23, 2018, 34 pages: United States Court of Appeals for the Federal Circuit; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; IPR2016-01201, U.S. Pat. No. 8,542,815; Notice of Appeal, (Dated: Jan. 22, 2018, 5 pages); with Paper 54; Entered: Nov. 20, 2017; Final Written Decision; 35 U.S.C. § 318(a) and 37 C.F.R. § 42.73; (29 pages).
Case: 18-1457; Document 6; Filed: Jan. 25, 2018; 14 pages: In the United States Court of Appeals for the Federal Circuit, *Apple Inc.*, Petitioner-Appellant, v. *Voip-Pal.com, Inc.*, Patent Owner-Appellee. On Appeal from the United States Patent and Trademark Office, Patent Trial and Appeal Board, in Case No. IPR2016-01201; Motion of Appellant Apple Inc. to Stay Appeal or for a Limited Remand to Allow Conclusion of Administrative Proceedings.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Petitioner's Reply in Support of its Motion for Entry of Judgment in Favor of Petitioner as a Sanction for Improper Ex Parte Communications by Patent Owner, or, Alternatively, for New and Constitutionally Correct Proceedings, Date: Jan. 26, 2018, 11 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01198, U.S. Pat. No. 9,179,005; Petitioner's Updated Exhibit List, Date: Jan. 26, 2018, 4 pages.
Apple Exhibit 1023, IPR2016-01198, Voip-Pal Issues a Correction to its Press Release of Sep. 18, 2017; Jan. 12, 2018, 1 page.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Petitioner's Reply in Support of its Motion for Entry of Judgment in Favor of Petitioner as a Sanction for Improper Ex Parte Communications by Patent Owner, or, Alternatively, for New and Constitutionally Correct Proceedings, Date: Jan. 26, 2018, 11 pages.
United States Patent and Trademark Office; Before the Patent Trial and Appeal Board; *Apple Inc.*, Petitioner, v. *Voip-Pal.com, Inc.*, Patent Owner; Case No. IPR2016-01201, U.S. Pat. No. 8,542,815; Petitioner's Updated Exhibit List, Date: Jan. 26, 2018, 4 pages.
Apple Exhibit 1023, IPR2016-01201, Voip-Pal Issues a Correction to its Press Release of Sep. 18, 2017; Jan. 12, 2018, 1 page.
Case: 18-1456; Document 7; Filed: Jan. 29, 2018; 2 pages: United States Court of Appeals for the Federal Circuit, Order; consolidating the appeals.
Case: 18-1457; Document 7; Filed: Jan. 29, 2018; 2 pages: United States Court of Appeals for the Federal Circuit, Order; consolidating the appeals.
Complaint for Patent Infringement, United States District Court, District of Nevada, Case No. 2:16-cv-2338, *Voip-Pal.com, Inc., a Nevada corporation*, Plaintiff v. *Twitter, Inc., a California corporation*, Defendant, Filed Oct. 6, 2016, 8 pages.
Civil Docket for Case #: 2:16-cv-02338-RFB-CWH, United States District Court, District of Nevada (Las Vegas), *Voip-Pal.com, Inc.* v. *Twitter, Inc.*, Date Filed: Oct. 6, 2016, 2 pages.
Table of Exhibits, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, 1 page.
Exhibit A, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, U.S. Pat. No. 8,542,815 B2, Issued Sep. 24, 2013, to Clay Perrault et al., 60 pages.
Exhibit B, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, U.S. Pat. No. 9,179,005 B2, Issued Nov. 3, 2015, to Clay Perrault et al., 63 pages.
Exhibit C, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Letter dated Dec. 18, 2015 giving notice of U.S. Pat. Nos. 8,542,815 B2; 9,179,005 B2; and related Patents listed in Attachment A, 4 pages.
Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Asserted Claims and Infringement Conditions, United States District Court, District of Nevada, *Voip-Pal.com, Inc., a Nevada corporation*, Plaintiff v. *Twitter, Inc., a California corporation*, Defendants, 6 pages.
Chart 1 to Exhibit D, Case 2.16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Chart 1, Asserted Claims and Infringement Conditions Concerning U.S. Pat. No. 8,542,815, United States District Court, District of Nevada, *Voip-Pal.com, Inc., a Nevada corporation*, Plaintiff v. *Twitter, Inc., a California corporation*, Defendants, 20 pages.
Chart 2 to Exhibit D, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Chart 2, Asserted Claims and Infringement Conditions Concerning U.S. Pat. No. 9,179,005, United States District Court, District of Nevada, *Voip-Pal.com, Inc., a Nevada corporation*, Plaintiff v. *Twitter, Inc., a California corporation*, Defendants, 28 pages.
Exhibit E, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, VPLM Active U.S. Patent Matters as of October 1, 2016, 2 pages.
Exhibit F, Case 2:16-cv-02338-RFB-CWH, Filed Oct. 6, 2016, Twitter Royalty Monetization Analysis Overview, 4 pages.
Patent Owner's Preliminary Response, Case No. IPR2016-01082, U.S. Pat. No. 8,542,815, *Unified Patents Inc.*, Petitioner, v. *Voip-Pal.com Inc.*, Patent Owner, Filing Date: Aug. 26, 2016, 80 pages.
Voip-Pal.com, Inc. Exhibit 2001, Comparison of portions of Petition with portions of Declaration, IPR2016-01082, *Unified Patents* v. *Voip-Pal*, Filing Date: Aug. 26, 2016, 9 pages.
Patent Owner's Preliminary Response to Petition for Inter Partes Review, Case No. IPR2016-01201, U.S. Pat. No. 8,542,815, *Apple Inc.*, Petitioner, v. *Voip-Pal.com Inc.*, Patent Owner, Filing Date: Sep. 19, 2016, 74 pages.
Voip-Pal.com, Inc. Exhibit 2001, Comparison of Petition (Ground 1) with Petition (Ground 2), IPR2016-01201, *Apple* v. *Voip-Pal*, Filing Date: Sep. 19, 2016, 19 pages.
Patent Owner's Preliminary Response to Petition for Inter Partes Review, Case No. IPR2016-01198, U.S. Pat. No. 9,179,005, *Apple Inc.*, Petitioner, v. *Voip-Pal.com Inc.*, Patent Owner, Filing Date: Sep. 21, 2016, 74 pages.
Voip-Pal.com, Inc. Exhibit 2001, Comparison of Petition (Ground 1) with Petition (Ground 2), IPR2016-01198, *Apple* v. *Voip-Pal*, Filing Date: Sep. 21, 2016, 21 pages.
Canadian Office Action dated Aug. 16, 2016 for Canadian Patent Application No. 2,681,984.
European Examination Report dated Aug. 29, 2016 for European Patent Application No. EP 07 855 436.7.
Communication under Rule 71(3) EPC—Intention to Grant—dated Oct. 14, 2016 for European Patent Application No. EP 07 816 106.4.

(56) **References Cited**

OTHER PUBLICATIONS

Andrew Cray, IP PBXs: Open Questions, Data Communications, The Global Magazine for Network Architects, pp. 1, 114, 69-84, Mar. 1999, United States.
Mark Spencer, et al., The Asterisk Handbook, Mar. 30, 2003, 71 pages, Version 2, Digium, Inc., United States.
Jim Van Meggelen, et al., Asterisk: The Future of Telephony, Aug. 31, 2005, 376 pages, O'Reilly Media, Inc., United States.
David Gomillion, et al., Building Telephony Systems with Asterisk, Sep., 2005, 174 pages, Packt Publishing, United Kingdom.
Paul Mahler., VoIP Telephony with Asterisk, 2004, 211 pp., Signate, United States.
Avaya Inc., Understanding VoIP, Leveraging Technology for a Competitive Edge, White Paper, Oct. 2005, 31 pages, Avaya Inc., United States.
Avaya Inc., Feature Description and Implementation for Avaya Communication Manager, Issue 3, Jun. 2005, 1444 pages, Avaya Inc., United States.
Avaya Inc., Administration Guide for Avaya Communication Manager, Issue 1, Jun. 2005, 1656 pages, Avaya Inc., United States.
Avaya Inc., Configuring Avaya Communication Manager with a Multi Location Dial Plan—Issue 1.0, Avaya Solution & Interoperability Test Lab, Mar. 18, 2004, 18 pages, Avaya Inc., United States.
Avaya Inc., Application Notes for H.323 Voice over IP Trunking between Avaya Communication Manager and VoIP Americas Nativevoip VoIP Service—Issue 1.0, Avaya Solution & Interoperability Test Lab, 2005, 13 pages, Avaya Inc., United States.
Avaya Inc., Configuring H.323 Signaling and IP Trunks between Avaya Communication Manager and Cisco CallManager 4.0—Issue 1.0, Avaya Solution & Interoperability Test Lab, 2005, 19 pages, Avaya Inc., United States.
John Alexander, et al., A Cisco AVVID Solution, Cisco CallManager Fundamentals, 2002, 722 pp., Cisco Press, United States.
John Alexander, et al., Cisco CallManager Fundamentals, Second Edition, 2006, 975 pages, Cisco Systems, Inc., United States.
Salvatore Collora et al., A Cisco AVVID Solution, Cisco CallManager Best Practices, 2004, 620 pages, Cisco Systems, Inc., United States.
Cisco Systems, Inc., Cisco IP Telephony Network Design Guide, Cisco CallManager Release 3.0(5), 2000, 262 pages, Cisco Systems, Inc., United States.
David Bateman, Configuring CallManager and Unity: A Step-by-Step Guide, 2005, 560 pages, Cisco Press, United States.
Cisco Systems, Inc., System Description for the Cisco Communications Network, Version 2.1, Jan. 1999, 42 pages, Cisco Systems, Inc., United States.
Web-page, http://business.mci.com/small_business/local_long_distance/mci_advantage_faq.jsp, as accessed Mar. 12, 2019, 3 pages, MCI Inc., United States.
Henry Sinnreich et al., SIP Beyond VoIP, Jul. 2005, pp. 48-53, VON Publishing, LLC, Melville, NY, United States.
Taavet Hinrikus, Skype API, Description of Skype API and how to use it, Version 1.2 Mar. 4, 2005, 2005, 37 pages, Skype Technologies S.A., Luxembourg.
Baset et al., An Analysis of the Skype Peer-to-Peer Internet Telephony Protocol, Sep. 15, 2004, 12 pages, Department of Computer Science, Columbia University, United States.
Hao Wang, Skype VoIP service—architecture and comparison, Infotech Seminar Advanced Communication Services (ACS), 2005, 10 pages, Institute of Communication Networks and Computer Engineering, University of Stuttgart, Germany.
Dennis Bergström, An analysis of Skype VoIP application for use in a corporate environment., http://www.geocities.com/bergstromdennis/, Oct. 28, 2004, 30 pages, Version 1.3, United States.
Web-page, Skype for Windows 1.4, http://www.skype.com/products/skype/windows/, as accessed Oct. 26, 2005, 1 page, Skype Technologies S.A., Luxembourg.
Web-page, http://www.skype.com/help/guides/call.html, as accessed Oct. 26, 2005, 1 page, Skype Technologies S.A., Luxembourg.
Web-page, How to Use Skype, http://www.skype.com/help/guides/usingskype.html, as accessed Oct. 27, 2005, 5 pages, Skype Technologies S.A., Luxembourg.
Web-page, How to Use SkypeOut, http://www.skype.com/help/guides/skypeout.html, as accessed Oct. 26, 2005, 2 pages, Skype Technologies S.A., Luxembourg.
Web-page, http://www.skype.com/products/, as accessed Oct. 30, 2005, 3 pages, Skype Technologies S.A., Luxembourg.
Web-page, Skype Out, http://www.skype.com/products/skypeout/, as accessed Jan. 27, 2005, 2 pages, Skype Technologies S.A., Luxembourg.
Web-page, Skype for Windows, http://www.skype.com/products/skype/windows/, as accessed Jan. 19, 2005, 1 page, Skype Technologies S.A., Luxembourg.
Web-page, http://www.skype.com/help/guides/remove.html, as accessed Jan. 25, 2005, 1 page, Skype Technologies S.A., Luxembourg.
Web-page, How to Use Skype, http://www.skype.com/help/guides/usingskype.html, as accessed Jan. 27, 2005, 5 pages, Skype Technologies S.A., Luxembourg.
Web-page, How to Use SkypeOut, http://www.skype.com/help/guides/skypeout.html, as accessed Jan. 27, 2005, 2 pages, Skype Technologies S.A., Luxembourg.
Web-page, http://www.skype.com/, as accessed Jan. 30, 2005, 3 pages, Skype Technologies S.A., Luxembourg.
Quintum Technologies, Inc., Tenor Call Routing Server, Product Guide, P/N. 480-0028-00-00, 70 pages, Quintum Technologies, Inc., United States.
Quintum Technologies, Inc., Tenor Call Routing, 27 pages, Quintum Technologies, Inc., United States.
Quintum Technologies, Inc., Tenor Call Routing, 19 pages, Quintum Technologies, Inc., United States.
Vonage Holdings Corp., Form 10-K Annual Report, Apr. 17, 2007, 142 pages, Vonage Holdings Corp., United States.
Federal Communications Commission, In the Matter of Vonage Holdings Corporation Petition for Declaratory Ruling Concerning an Order of the Minnesota Public Utilities Commission, Memorandum Opinion and Order, Nov. 12, 2004, 41 pages, United States.
William B. Wilhelm, et al., Petition for Declaratory Ruling, Sep. 22, 2003, 142 pages, United States.
William B. Wilhelm, et al., WC 03-211; Vonage Petition for Declaratory Ruling, Oct. 1, 2004, 201 pages, United States.
Web-page, http://www.vonage.com/no_flash/features.php?feature=3 way_ calling, as accessed Nov. 6, 2004, 1 page, Vonage Holdings Corp, United States.
Web-page, http://www.vonage.com/no_flash/features.php?feature=7_dig it_ dialing, as accessed Nov. 6, 2004, 1 page, Vonage Holdings Corp, United States.
Web-page, http://www.vonage.com/no_flash/features.php?feature=311, as accessed Nov. 6, 2004, 2 pages, Vonage Holdings Corp, United States.
Web-page, http:// www.vonage.com/no_flash/features.php?feature=subscriber_to_subscriber, as accessed Apr. 6, 2005, 1 page, Vonage Holdings Corp, United States.
J. Rosenberg, et al., SIP: Session Initiation Protocol, Jun. 2002, 269 pages, The Internet Society, United States.
Jonathan Davidson, et al., A Systematic Approach to Understanding the Basics of Voice over IP, Voice over IP Fundamentals, 2000, 421 pages, Cisco Press, United States.
John Alexander, et al., A Cisco AVVID Solution, Cisco CallManager Fundamentals, 2002, 729 pages, Cisco Press, United States.
J. Postel, RFC 768, "User Datagram Protocol", ISI, Aug. 1980, 3 pages, https://tools.ietf.org/pdf/rfc768.pdf.
J. Postel et al., RFC 793, "Transmission Control Protocol: DARPA Internet Program Protocol Specification," Sep. 1981, 89 pages, https://tools.ietf.org/pdf/rfc768.pdf.
J. Postel, RFC 821, "Simple Mail Transfer Protocol", ISI, Aug. 1982, 70 pages, https://tools.ietf.org/pdf/rfc821.pdf.
J. Mogul, J. Postel, RFC 950, "Internet Standard Subnetting Procedure," Aug. 1985, 18 pages, https://tools.ietf.org/pdf/rfc950.pdf.
H. Schulzrinne et al., RFC 1889, "RTP: A Transport Protocol for Real-Time Applications," Jan. 1996, 75 pages, https://tools.ietf.org/pdf/rfc1889.pdf.

(56) **References Cited**

OTHER PUBLICATIONS

P. Falstrom, Cisco Systems Inc., RFC 2916, "E.164 number and DNS," Sep. 2000, 10 pages, https://tools.ietf.org/pdf/rfc2916.pdf.
R. Stewart et al., RFC 2960, "Stream Control Transmission Protocol," Oct. 2000, 134 pages, https://tools.ietf.org/pdf/rfc2960.pdf.
G. Sidebottom et al., RFC 3332, "Signaling System 7 (SS7) Message Transfer Part 3 (MTP3)—User Adaptation Layer (M3UA)," Sep. 2002, 120 pages, https://tools.ietf.org/pdf/rfc3332.pdf.
G. Camarillo et al., RFC 3398, "Integrated Services Digital Network (ISDN) User Part (ISUP) to Session Initiation Protocol (SIP) Mapping," Dec. 2002, 68 pages, https://tools.ietf.org/pdf/rfc3398.pdf.
F. Andreasen et al., Cisco Systems, RFC 3435, "Media Gateway Control Protocol (MGCP)—Version 1.0," Jan. 2003, 210 pages, https://tools.ietf.org/pdf/rfc3435.pdf.
M. Foster et al., NeuStar, Inc., RFC 3482, "No. Portability in the Global Switched Telephone Network (GSTN): An Overview," Feb. 2003, 30 pages, https://tools.ietf.org/pdf/rfc3482.pdf.
ITU-T Recommendation H.225.0, "Call signalling protocols and media stream packetization for packet-based multimedia communication systems," 1996, https://www.itu.int/rec/T-REC-H.225.0.
ITU-T Recommendation H.245, "Control protocol for multimedia communication," 1996, https://www.itu.int/rec/T-REC-H.245/en.
ITU-T Recommendation H.248.1, "Gateway control protocol," 2002, https://www.itu.int/rec/T-REC-H.248.1.
ITU-T Recommendation H.323, "Packet-based multimedia communications systems," 1996, https://www.itu.int/rec/T-REC-H.323/.
ITU-T Recommendation X.500, "Information technology—Open Systems Interconnection—the Directory: Overview of concepts, models and services," 1988, https://www.itu.int/rec/T-REC-X.500.
Bellcore, "Bell Communications Research Specification of Signalling System No. 7" (Bell Communications Research Specification of SS7), GR-246-CORE, Issue 3, 2644 pages, Dec. 1998.
Performance Technologies, Inc., "Tutorial on Signaling System 7 (SS7)," SS7 Tutorial by Performance Technologies (www.pt.com), 23 pages, 2003.
Huitema et al., "An Architecture for Residential Internet Telephony Service," IEEE Network, May/Jun. 1999, 7 pages.
Lucent Technologies, "Definity System's Little Instruction Book for Basic Administration," Apr. 2000, 124 pages.
Cisco Systems, "Enhanced Gatekeeper Solutions Using GKTMP/API", White Paper, 2000, 12 pages.
Anerousis et al., "Tops: An Architecture for Telephony over Packet Networks," IEEE Journal on Selected Areas in Communications, vol. 17, No. 1, Jan. 1999 (18 pages).
Anonymous, "What Is ENUM?", Network World, IDG Communications, May 11, 2004, as downloaded Sep. 3, 2020 from: https://www.networkworld.com/article/2332977/lan-wan-what-is-enum.html (8 pp.).
Cisco Systems, "Cisco Gatekeeper External Interface Reference, Version 4.2," Cisco IOS Release 12.2(15)T, Mar. 2003 (146 pages).
Don Brown, "Unified Communications Using Communité," White Paper, Interactive Intelligence, May 1, 2002 (24 pages).
Vonexus, "Microsoft-based IP PBX Communications Solution: Enterprise Interaction Center," Vonexus (a wholly-owned subsidiary of Interactive Intelligence Inc., Jul. 2004 (4 pages).
Donald E. Brown, "The Interaction Center Platform," White Paper, Interactive Intelligence, Feb. 18, 2003 (35 pages).
Interactive Intelligence, Inc., "Interaction Director Technical Overview," Interaction Center 1.3, 2.1, and 2.2, Interactive Intelligence, 2003 (35 pages).
Interactive Intelligence, Inc., "Interaction SIP Proxy," Datasheet, Interactive Intelligence, Feb. 2004 (2 pages).
Bob Roaten, "IP Telephony and EIC: A Technical Overview," White Paper, Interactive Intelligence, Jul. 22, 1998 (9 pages).
David Fuller, "IP Telephony and the Interaction Center Platform," White Paper, Interactive Intelligence, Sep. 25, 2003 (29 pages).

* cited by examiner

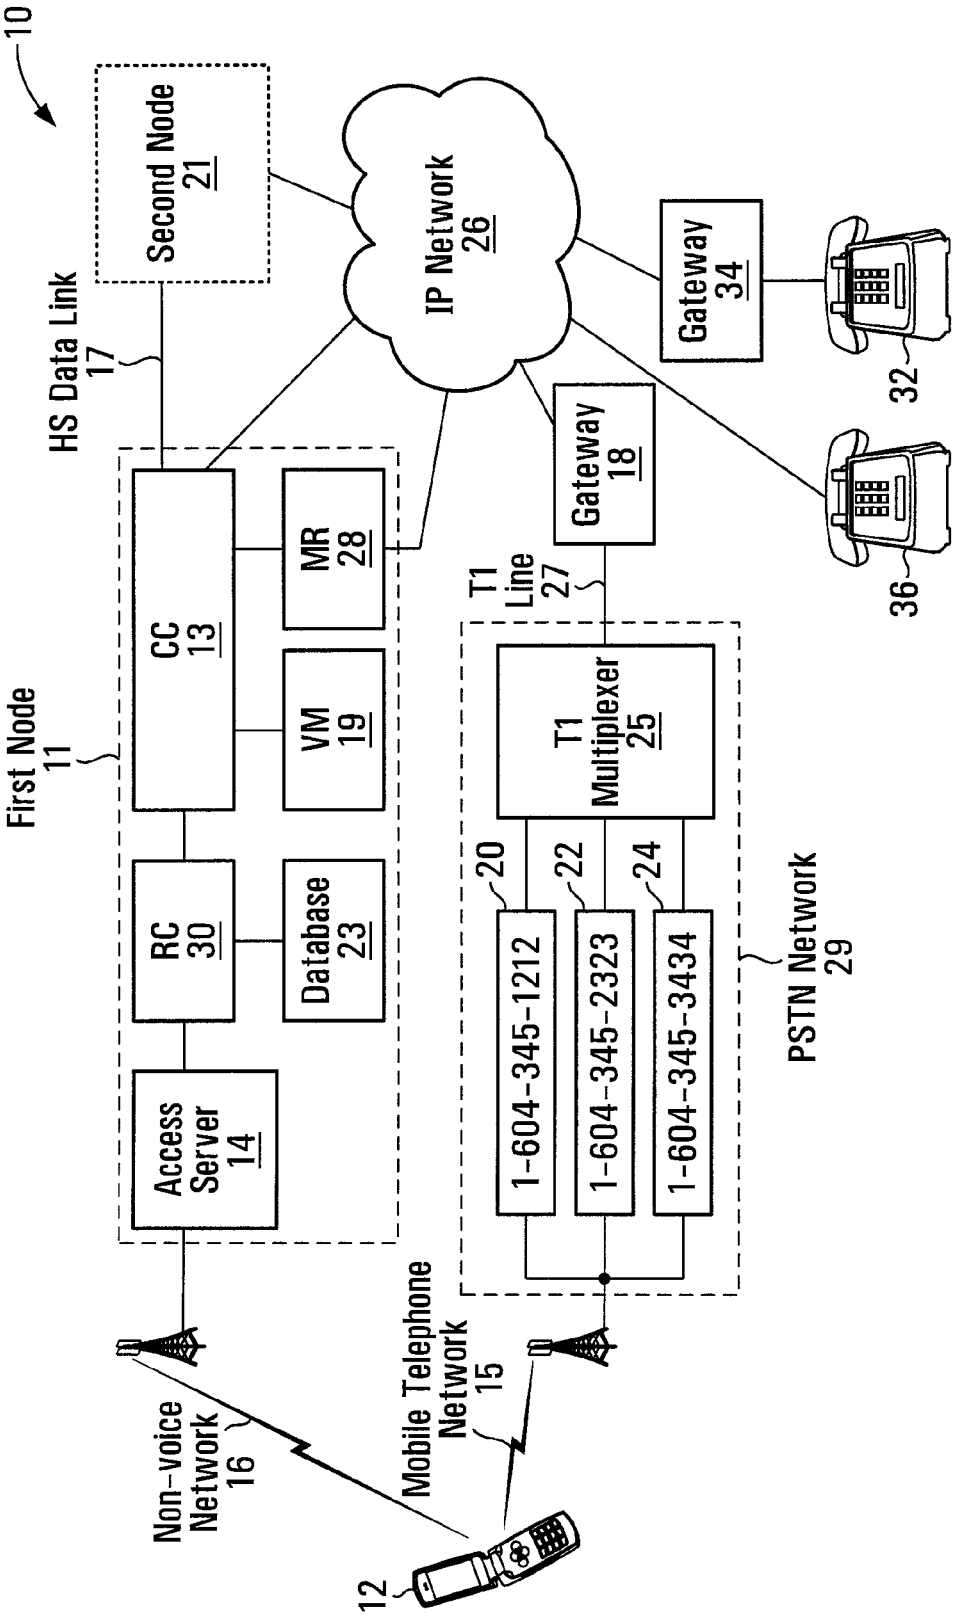
10
Second Node 21
IP Network 26
HS Data Link 17
Gateway 34
32
Gateway 18
36
T1 Line 27
First Node 11
CC 13
MR 28
VM 19
T1 Multiplexer 25
RC 30
Database 23
20
22
24
1-604-345-1212
1-604-345-2323
1-604-345-3434
PSTN Network 29
Access Server 14
Mobile Telephone Network 15
Non-voice Network 16
12

FIG. 1

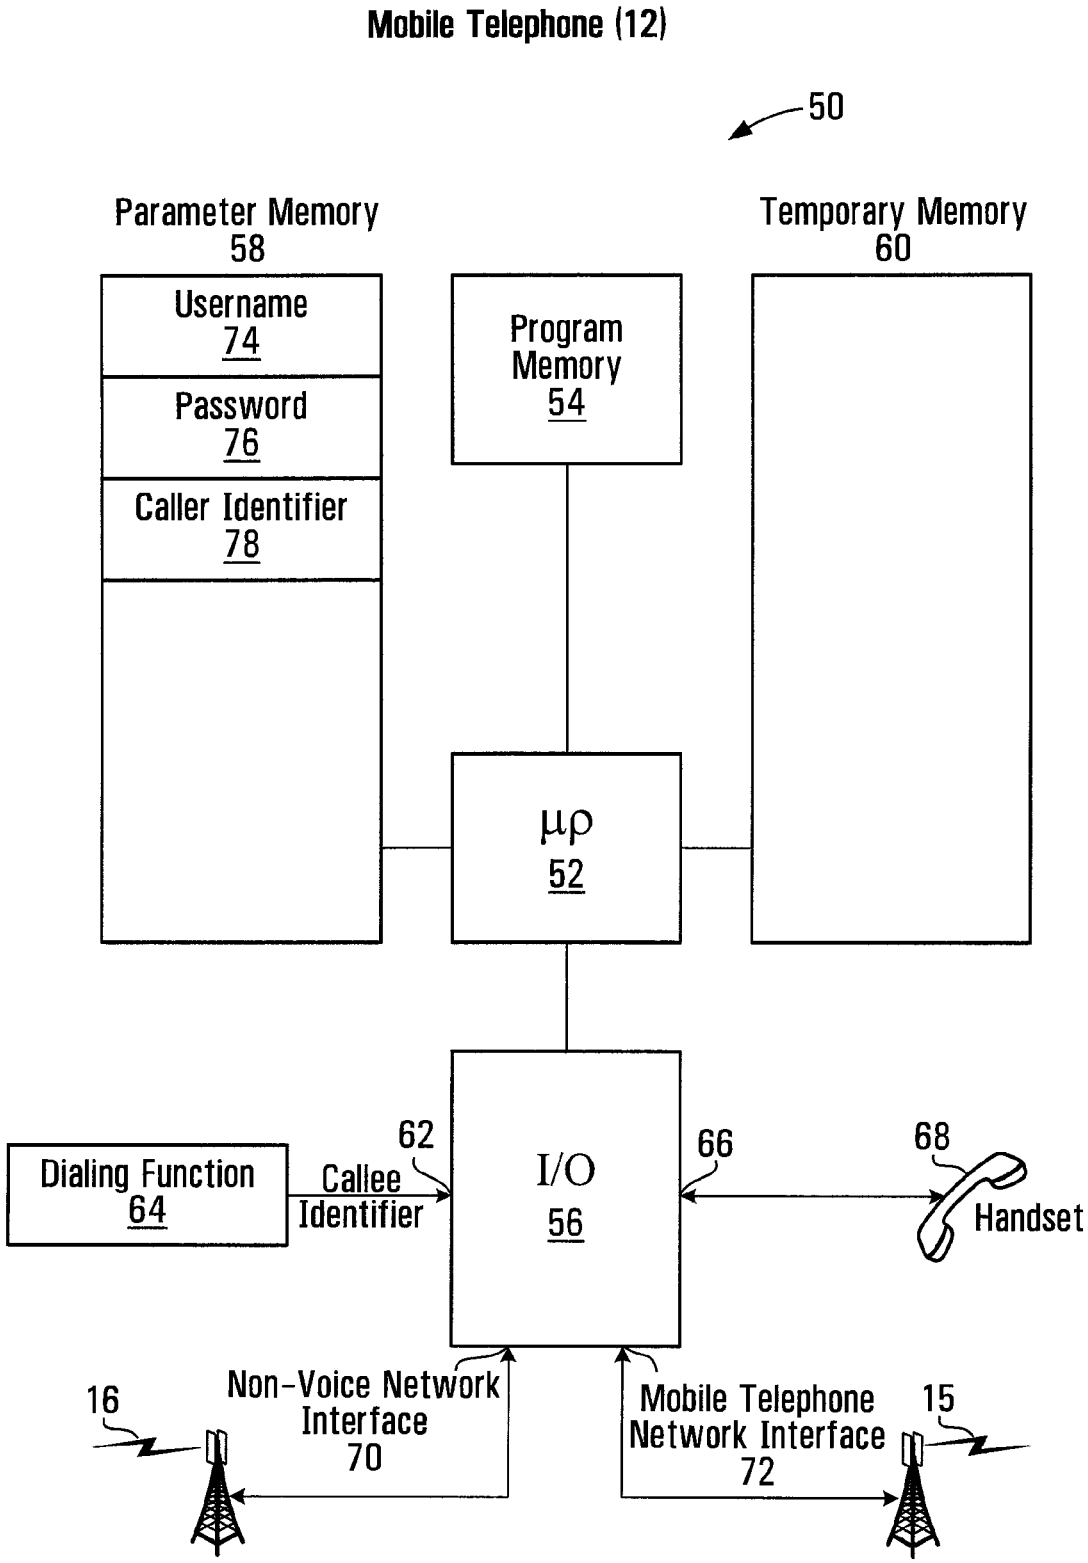
Mobile Telephone (12)
50
Parameter Memory
58
Username
74
Password
76
Caller Identifier
78
Program
Memory
54
Temporary Memory
60
μρ
52
I/O
56
62
Callee
Identifier
Dialing Function
64
66
68
Handset
16
Non-Voice Network
Interface
70
Mobile Telephone
Network Interface
72
15

FIG. 2

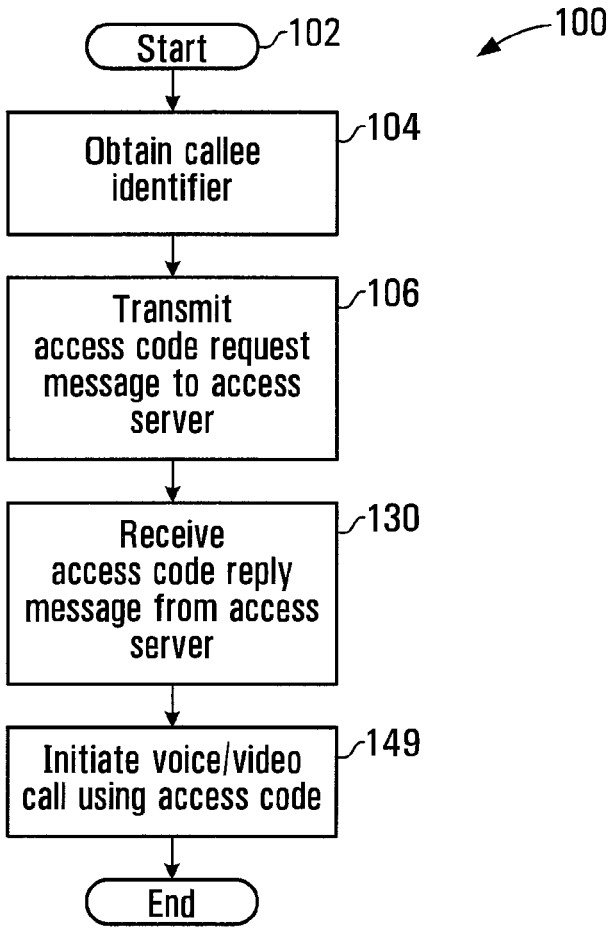

FIG. 3

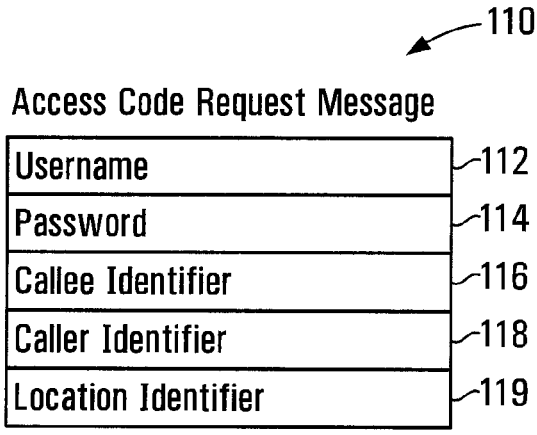

FIG. 4

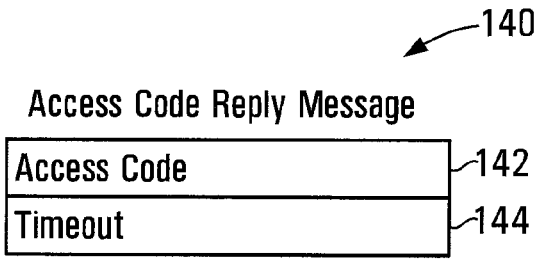

FIG. 5

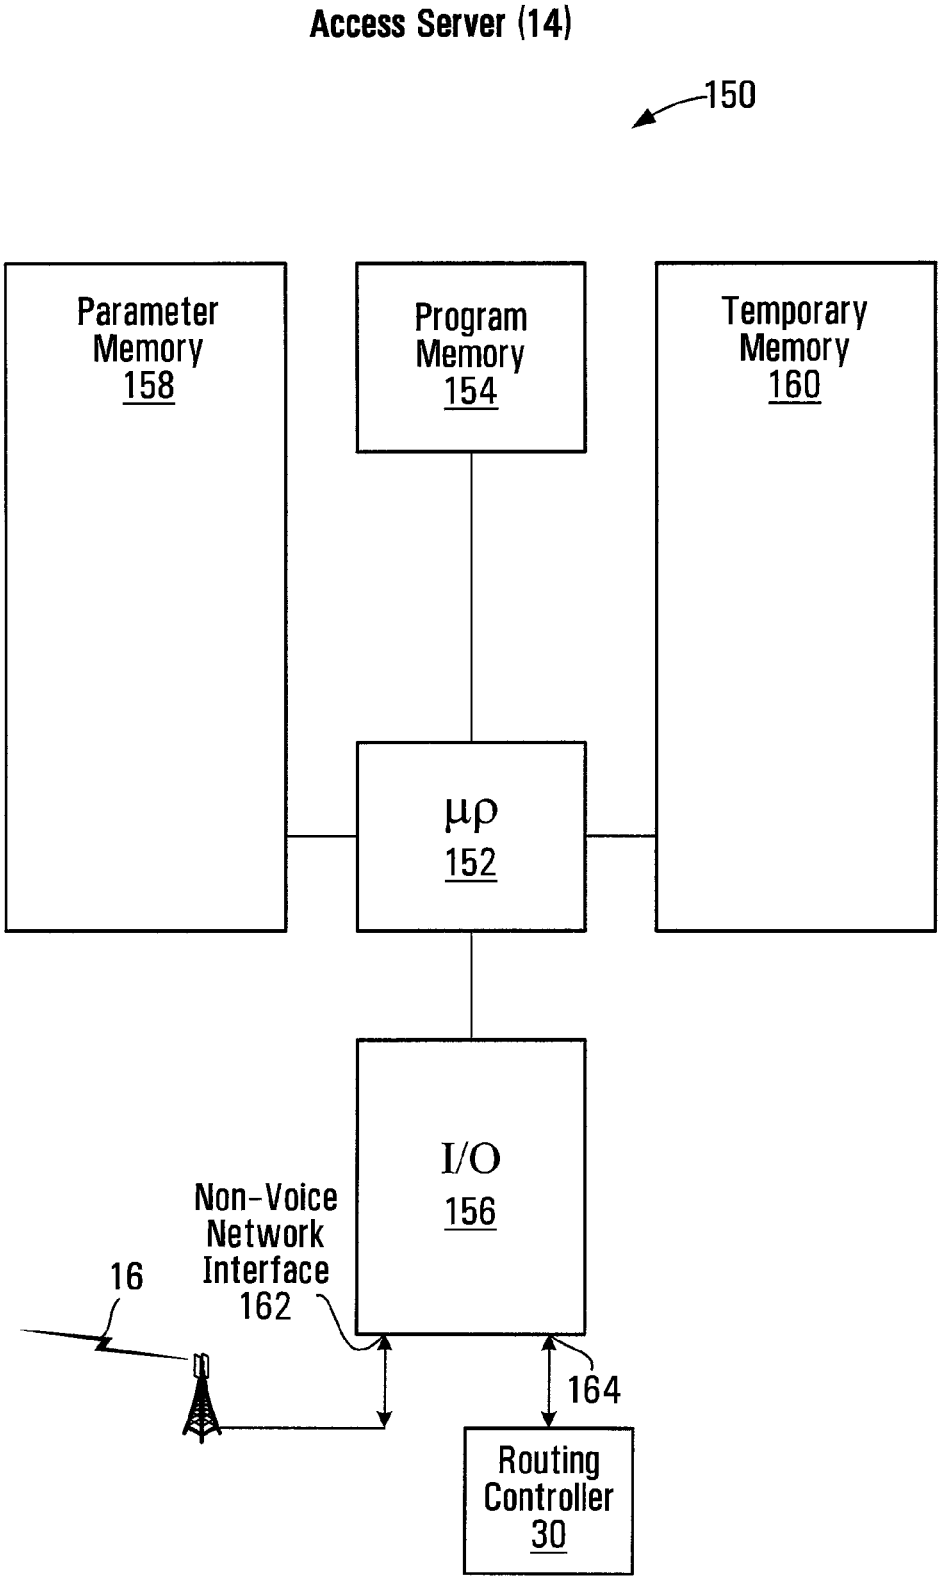
Access Server (14)
150
Parameter Memory 158
Program Memory 154
Temporary Memory 160
μρ 152
I/O 156
Non-Voice Network Interface 162
16
164
Routing Controller 30

FIG. 6

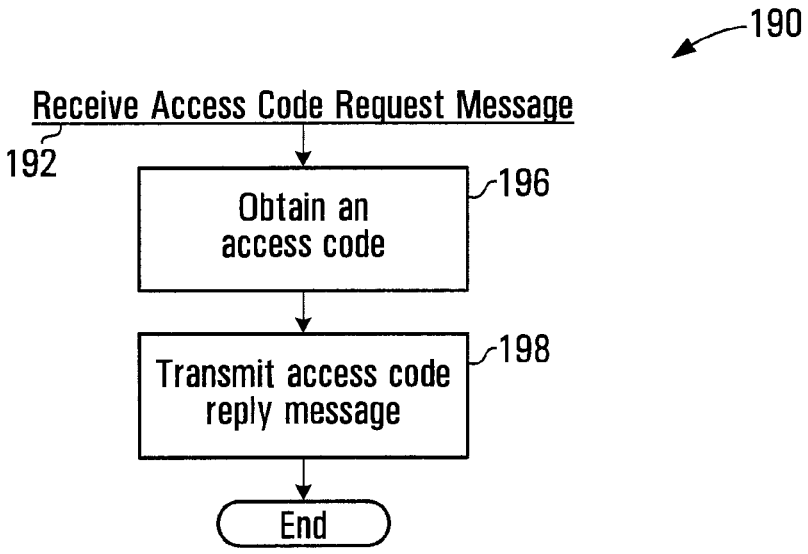
190
Receive Access Code Request Message
192
Obtain an access code
196
Transmit access code reply message
198
End

FIG. 7

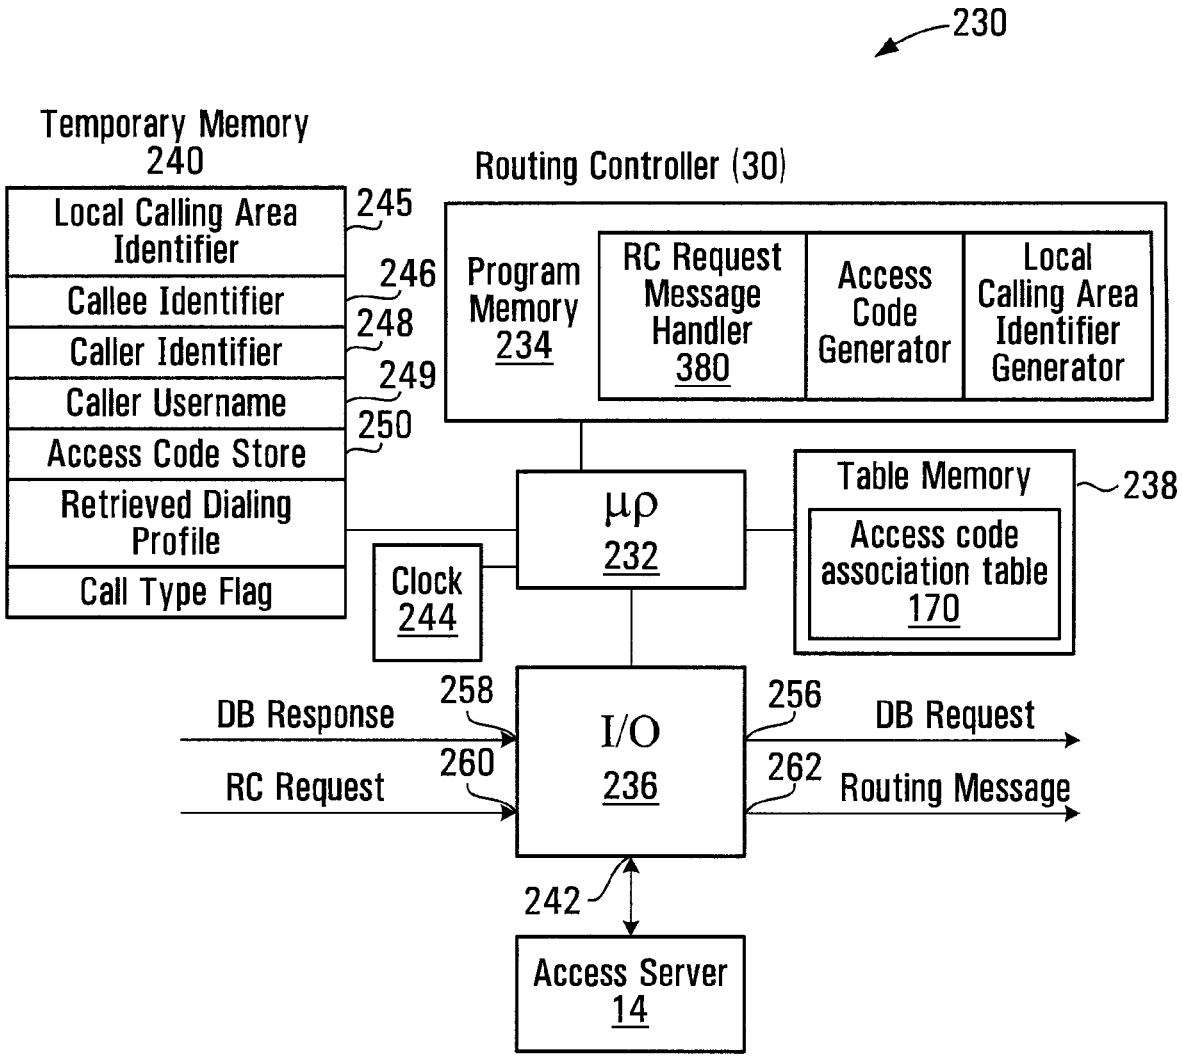
230
Temporary Memory
240
Local Calling Area Identifier
Callee Identifier
Caller Identifier
Caller Username
Access Code Store
Retrieved Dialing Profile
Call Type Flag
245
246
248
249
250
Routing Controller (30)
Program Memory 234
RC Request Message Handler 380
Access Code Generator
Local Calling Area Identifier Generator
μρ 232
Clock 244
Table Memory
238
Access code association table 170
DB Response
RC Request
258
260
I/O 236
256
262
DB Request
Routing Message
242
Access Server 14

FIG. 8

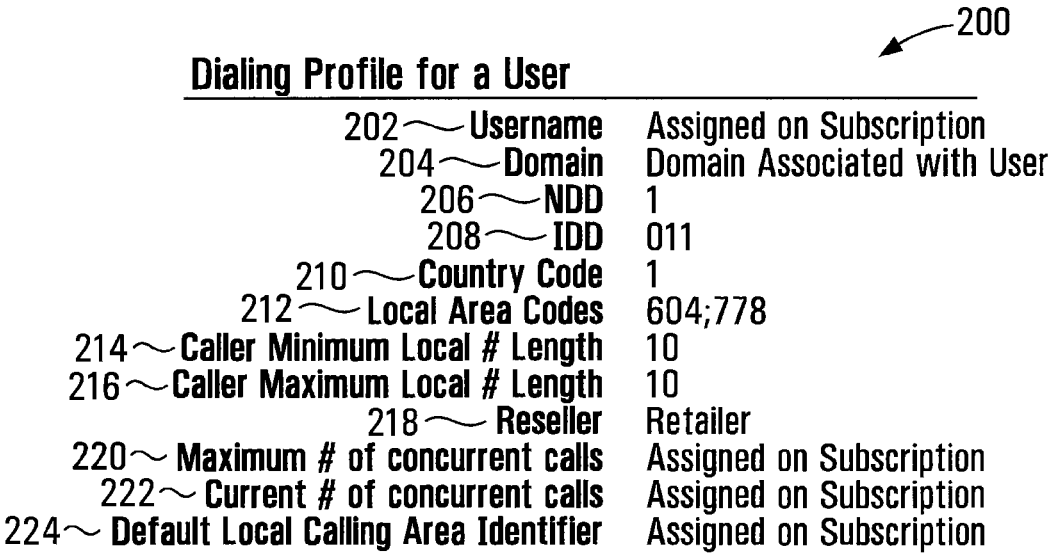
200
Dialing Profile for a User
202 Username
Assigned on Subscription
204 Domain
Domain Associated with User
206 NDD
1
208 IDD
011
210 Country Code
1
212 Local Area Codes
604;778
214 Caller Minimum Local # Length
10
216 Caller Maximum Local # Length
10
218 Reseller
Retailer
220 Maximum # of concurrent calls
Assigned on Subscription
222 Current # of concurrent calls
Assigned on Subscription
224 Default Local Calling Area Identifier
Assigned on Subscription

FIG. 9

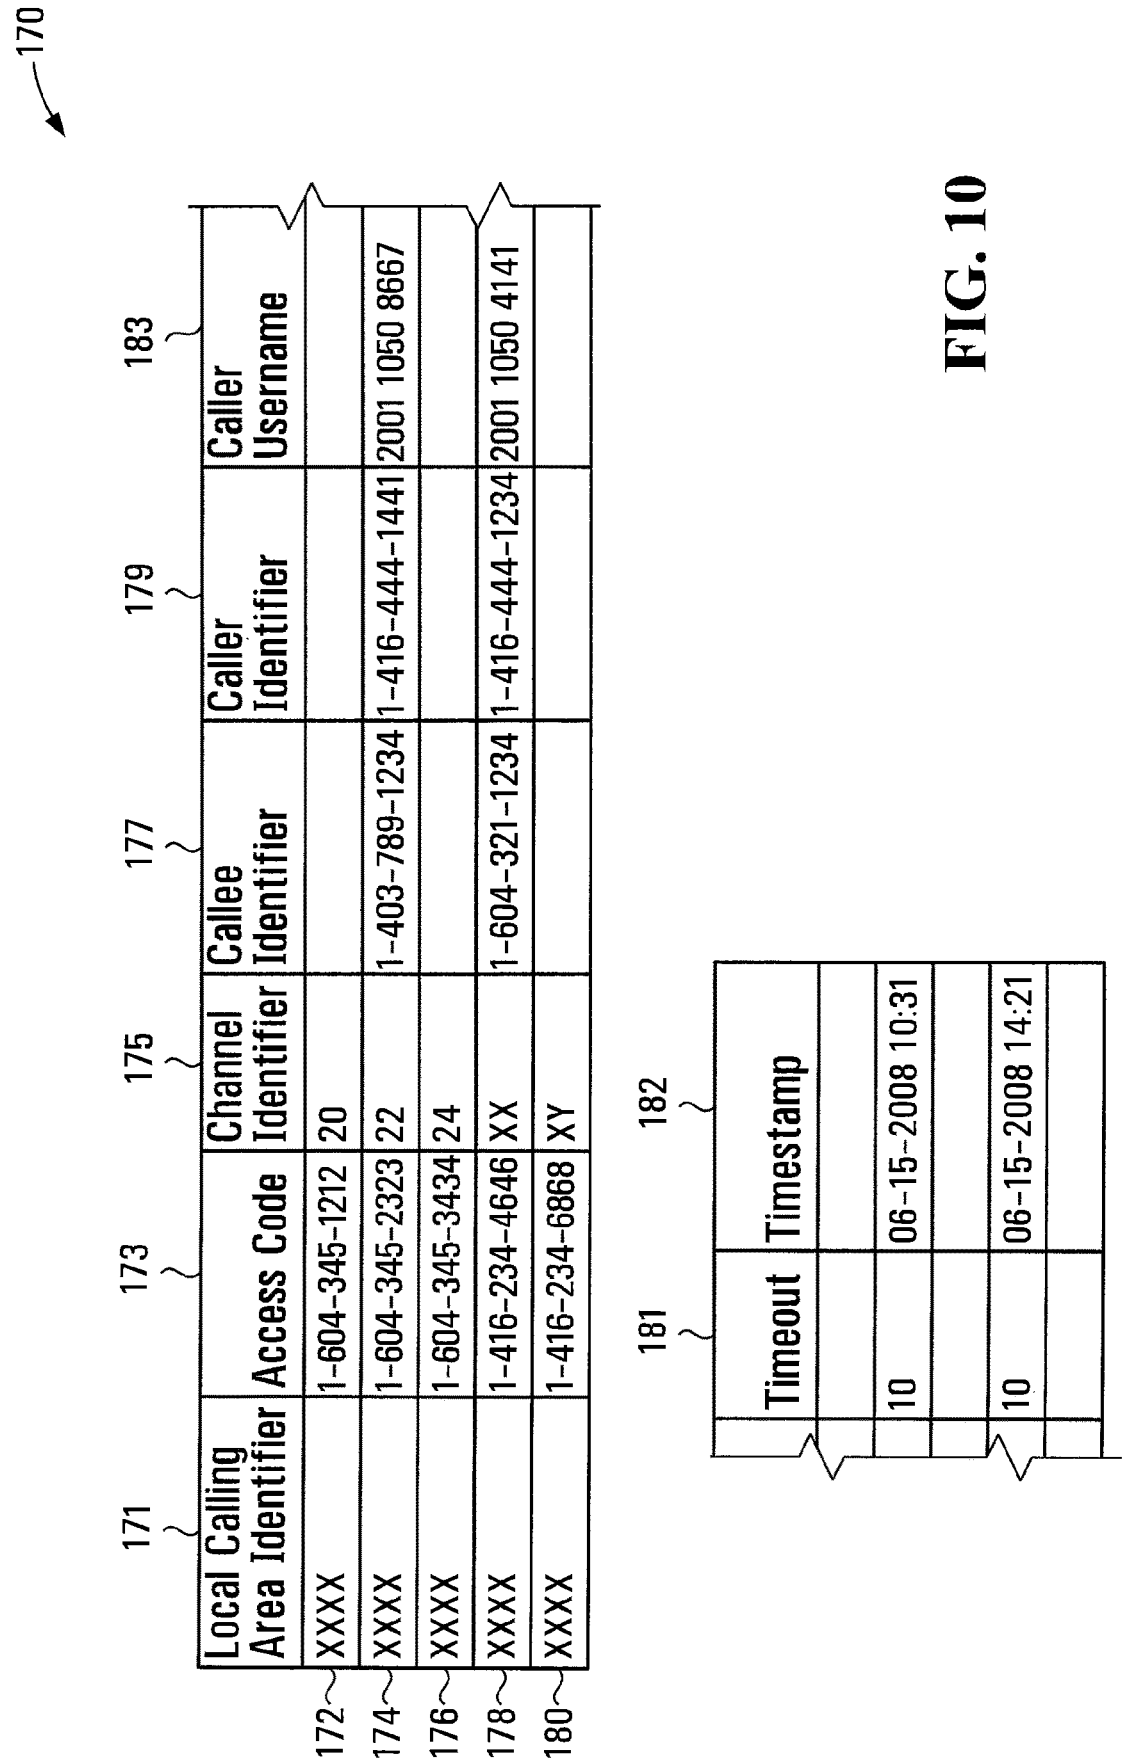
170
171
173
175
177
179
183
Local Calling Area Identifier
Access Code
Channel Identifier
Callee Identifier
Caller Identifier
Caller Username
XXXX
1-604-345-1212
20
1-604-345-2323
22
1-403-789-1234
1-416-444-1441
2001 1050 8667
1-604-345-3434
24
1-604-321-1234
1-416-444-1234
2001 1050 4141
1-416-234-4646
XX
1-416-234-6868
XY
172
174
176
178
180
181
182
Timeout
Timestamp
10
06-15-2008 10:31
10
06-15-2008 14:21

FIG. 10

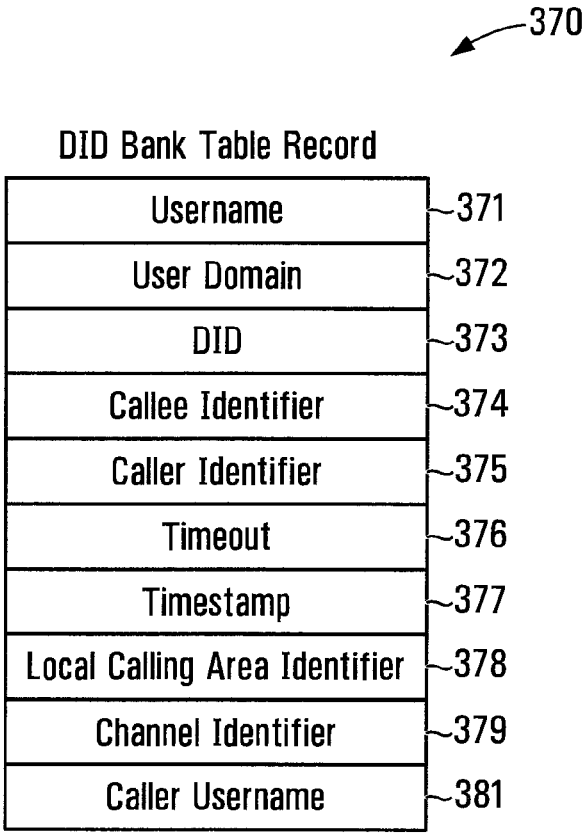
370
DID Bank Table Record
Username
371
User Domain
372
DID
373
Callee Identifier
374
Caller Identifier
375
Timeout
376
Timestamp
377
Local Calling Area Identifier
378
Channel Identifier
379
Caller Username
381

FIG. 11

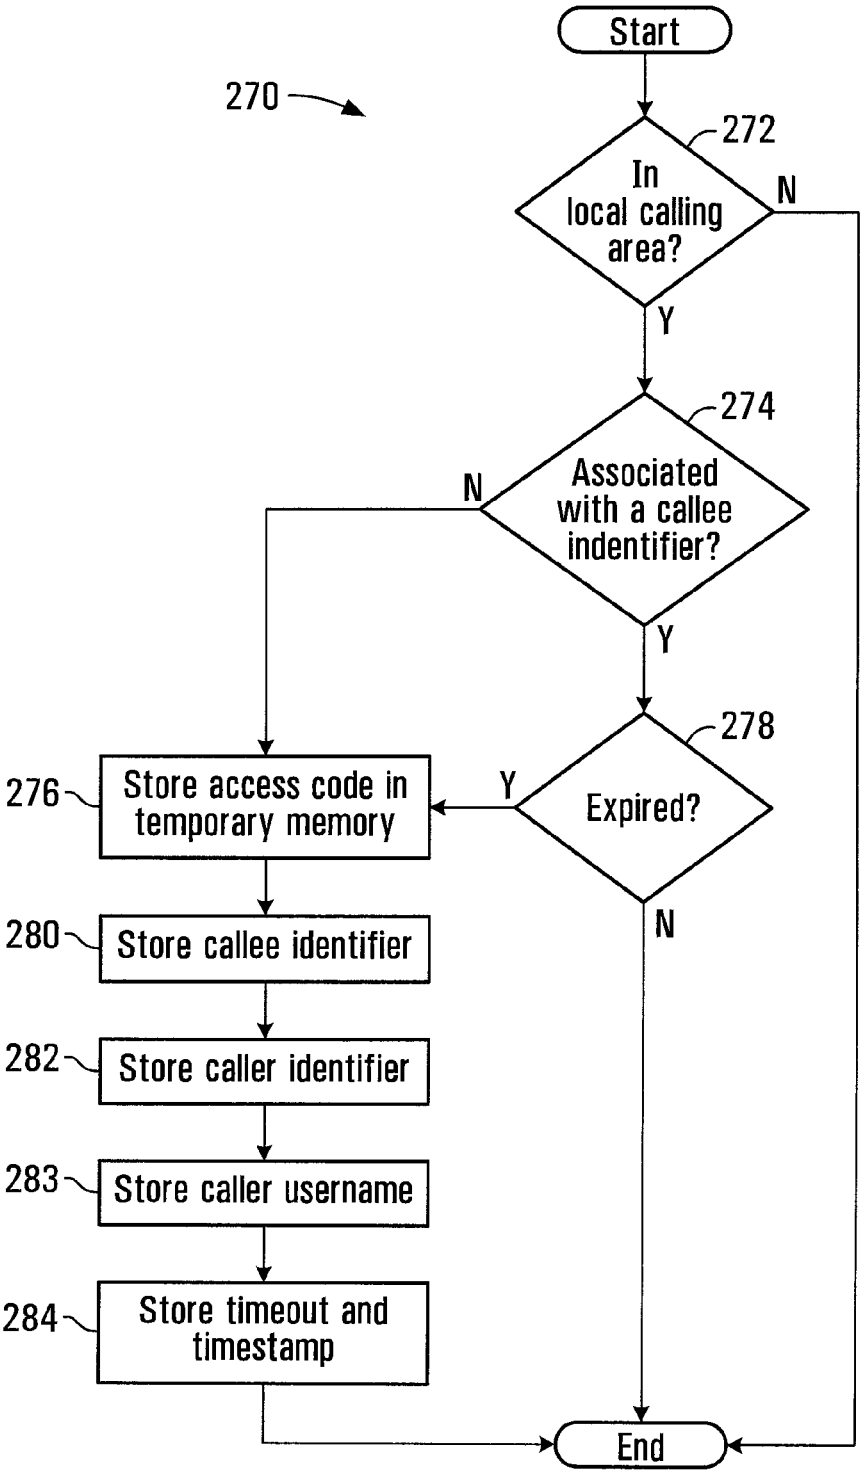
Start
270
272
In local calling area?
N
Y
274
Associated with a callee indentifier?
N
Y
278
Expired?
Y
N
276
Store access code in temporary memory
280
Store callee identifier
282
Store caller identifier
283
Store caller username
284
Store timeout and timestamp
End

FIG. 12

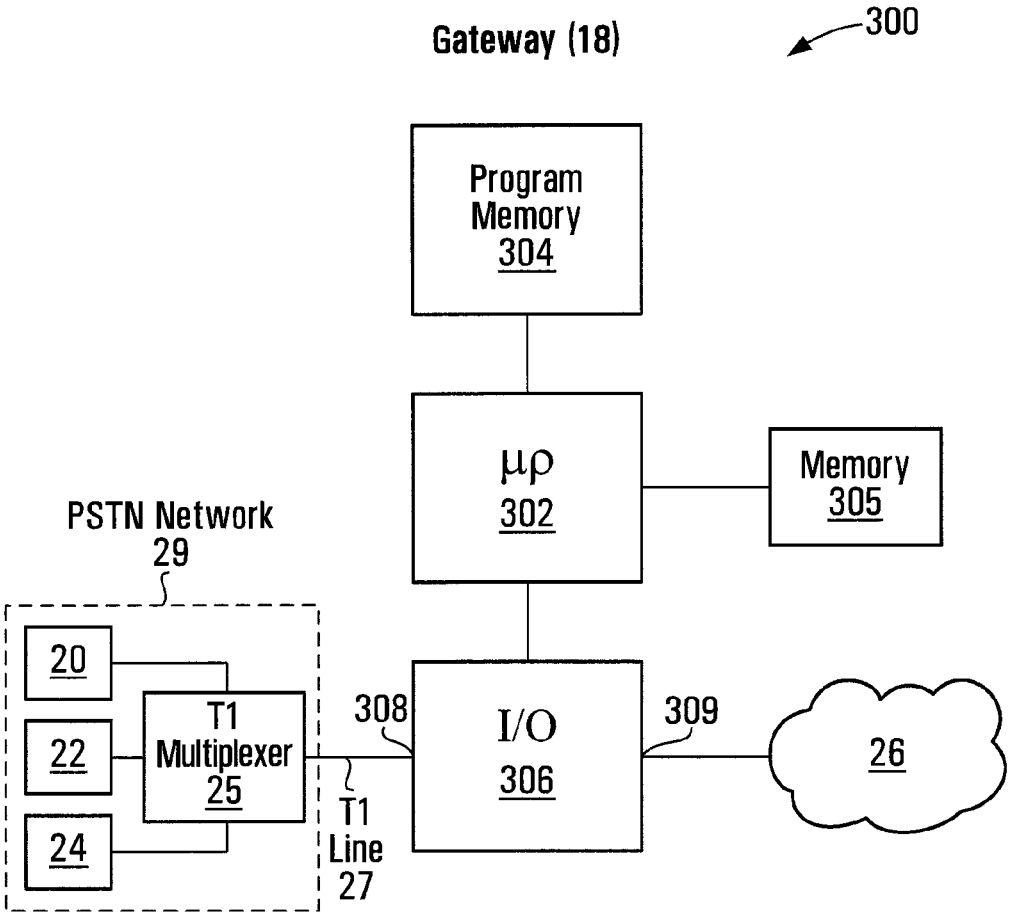

FIG. 13

310

SIP Invite Message

312	Caller Identifier	1-604-678-1234@20.14.102.5
314	Callee Identifier	1-604-345-1212
315	Digest Parameter	XXXXXXX
316	Call Identifer	FF10@20.14.102.5
317	IP Address	20.14.102.5
318	Gateway UDP Port	12378

FIG. 14

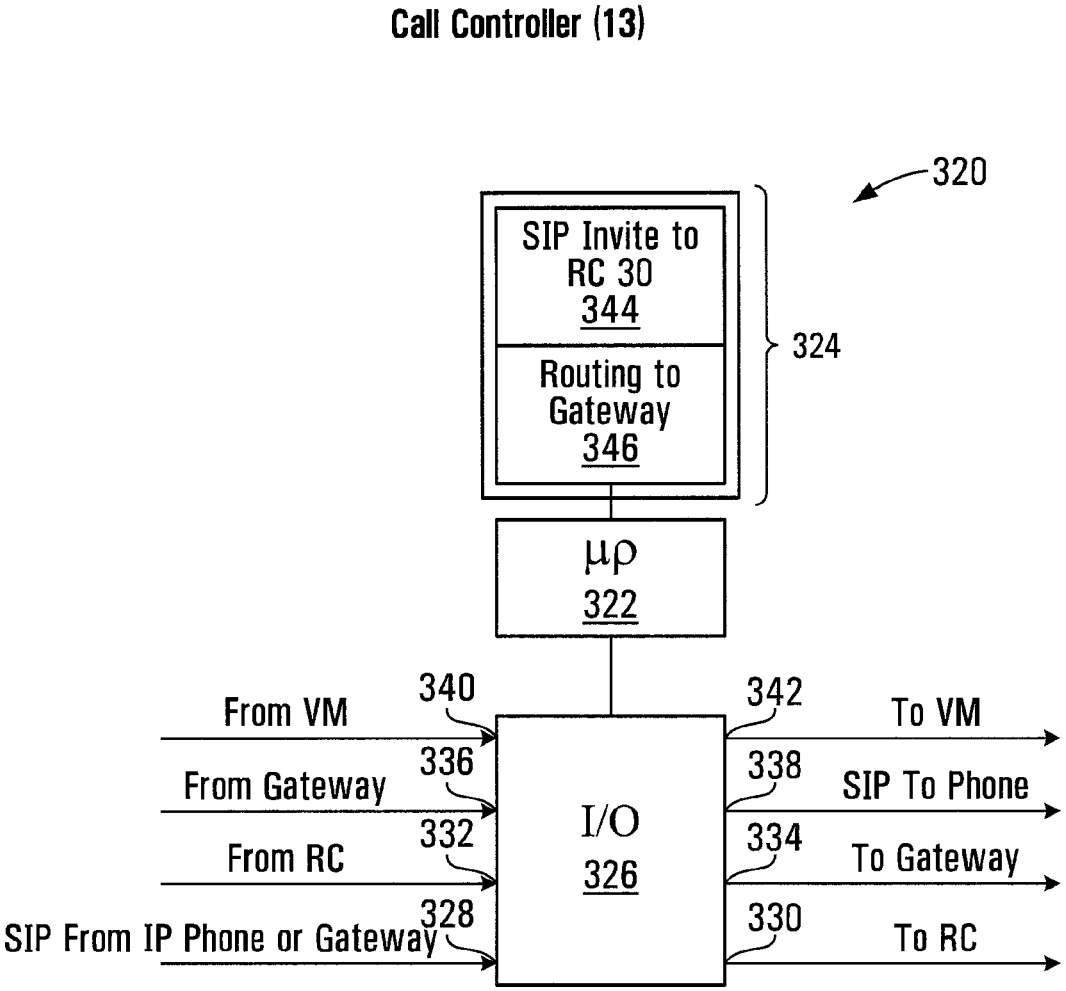
Call Controller (13)
320
SIP Invite to RC 30
344
Routing to Gateway
346
324
μρ
322
340
From VM
336
From Gateway
332
From RC
328
SIP From IP Phone or Gateway
I/O
326
342
To VM
338
SIP To Phone
334
To Gateway
330
To RC

FIG. 15

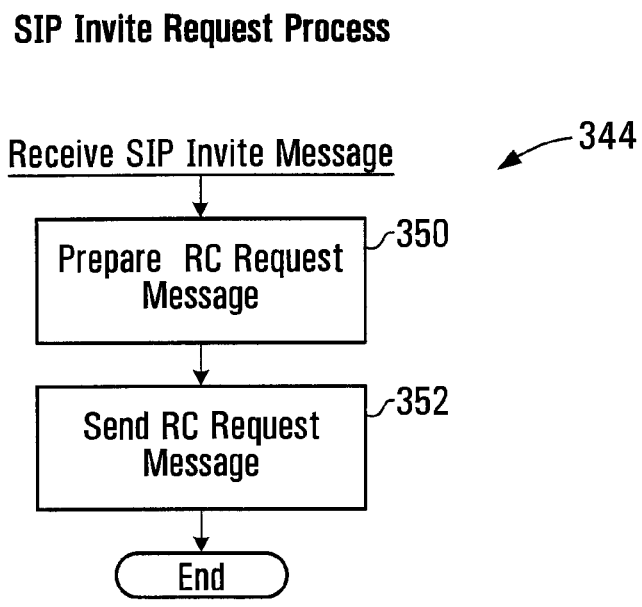
SIP Invite Request Process
Receive SIP Invite Message
344
Prepare RC Request Message
350
Send RC Request Message
352
End

FIG. 16

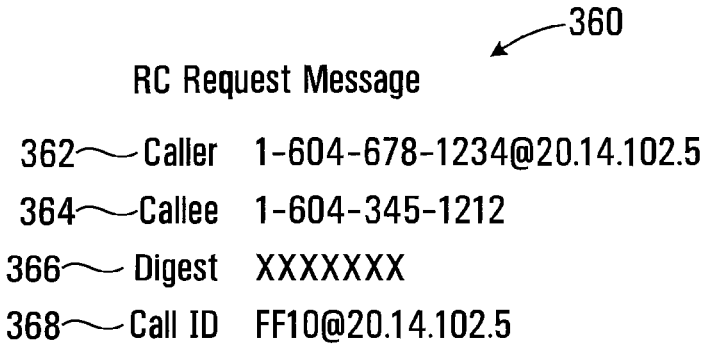
360
RC Request Message
362 Caller 1-604-678-1234@20.14.102.5
364 Callee 1-604-345-1212
366 Digest XXXXXXX
368 Call ID FF10@20.14.102.5

FIG. 17

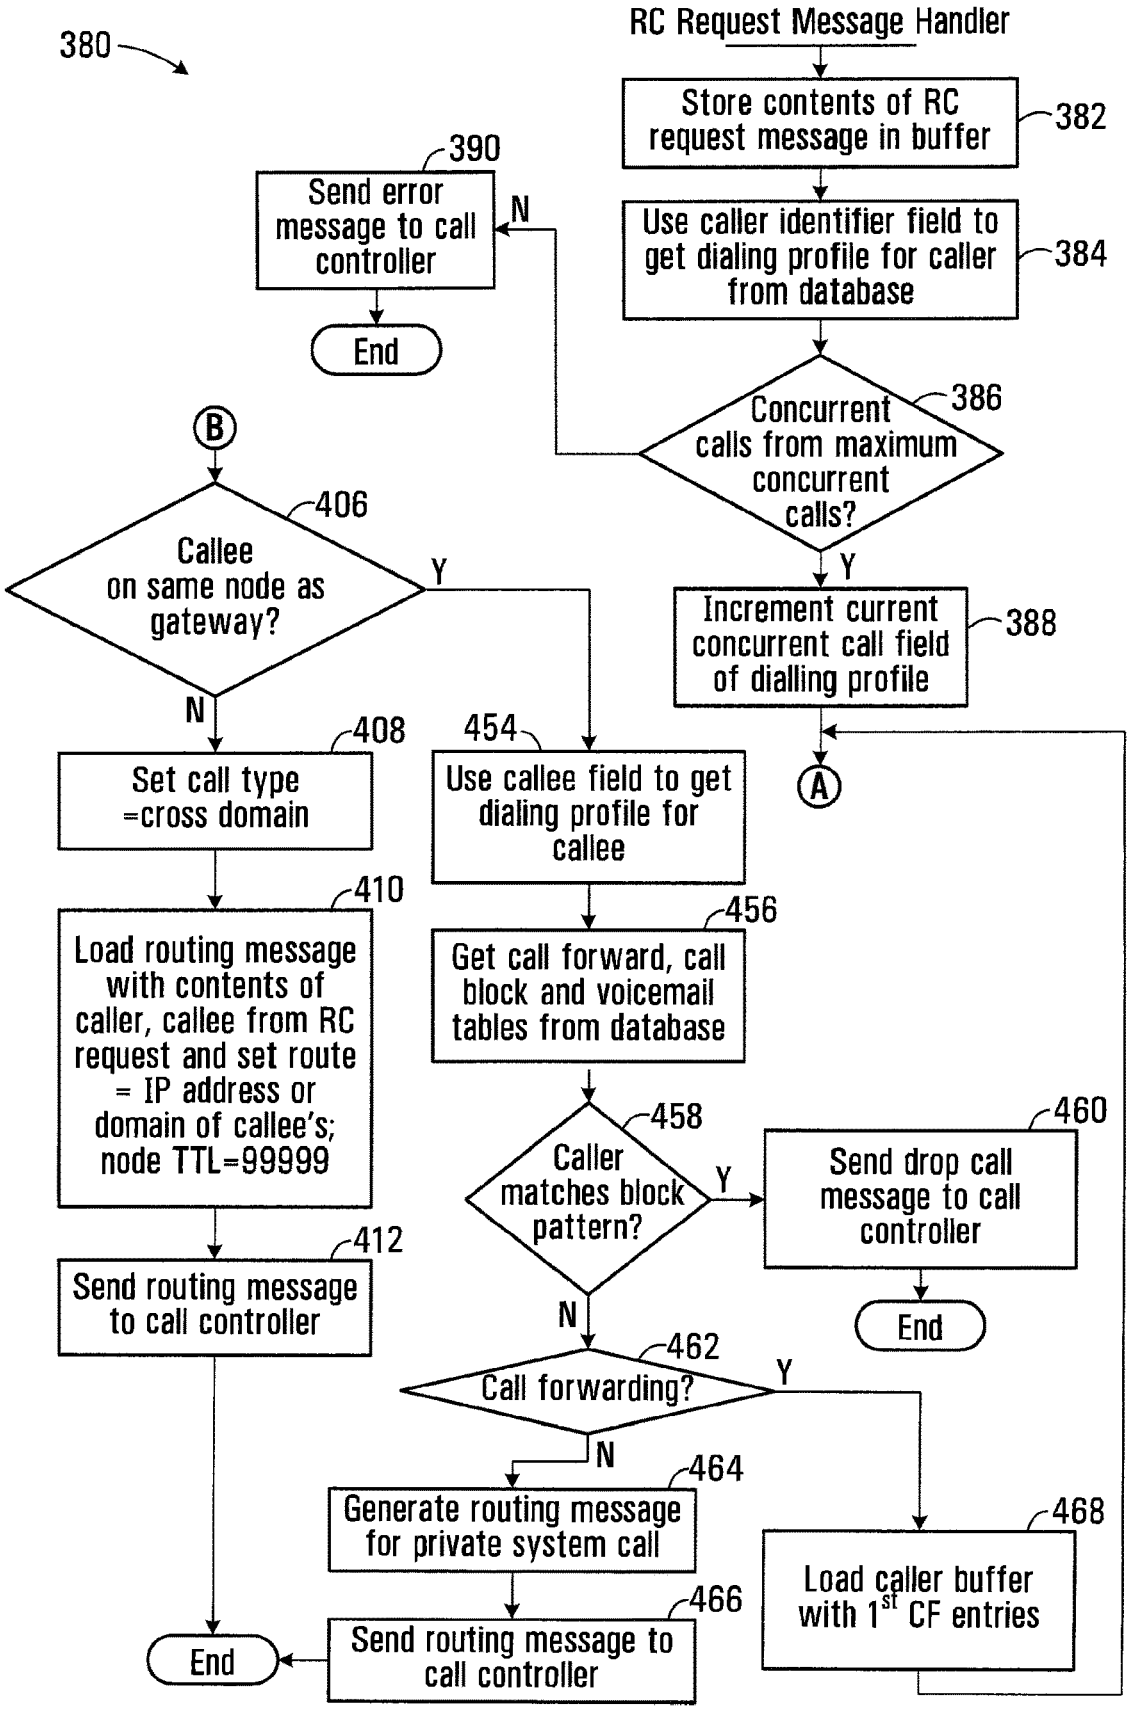
380
RC Request Message Handler
Store contents of RC request message in buffer
382
Use caller identifier field to get dialing profile for caller from database
384
Concurrent calls from maximum concurrent calls?
386
N
Y
Send error message to call controller
390
End
Increment current concurrent call field of dialling profile
388
A
B
Callee on same node as gateway?
406
Y
N
Set call type =cross domain
408
Load routing message with contents of caller, callee from RC request and set route = IP address or domain of callee's; node TTL=99999
410
Send routing message to call controller
412
454
Use callee field to get dialing profile for callee
456
Get call forward, call block and voicemail tables from database
Caller matches block pattern?
458
Y
N
Send drop call message to call controller
460
End
Call forwarding?
462
Y
N
Generate routing message for private system call
464
Send routing message to call controller
466
End
Load caller buffer with 1st CF entries
468

FIG. 18A

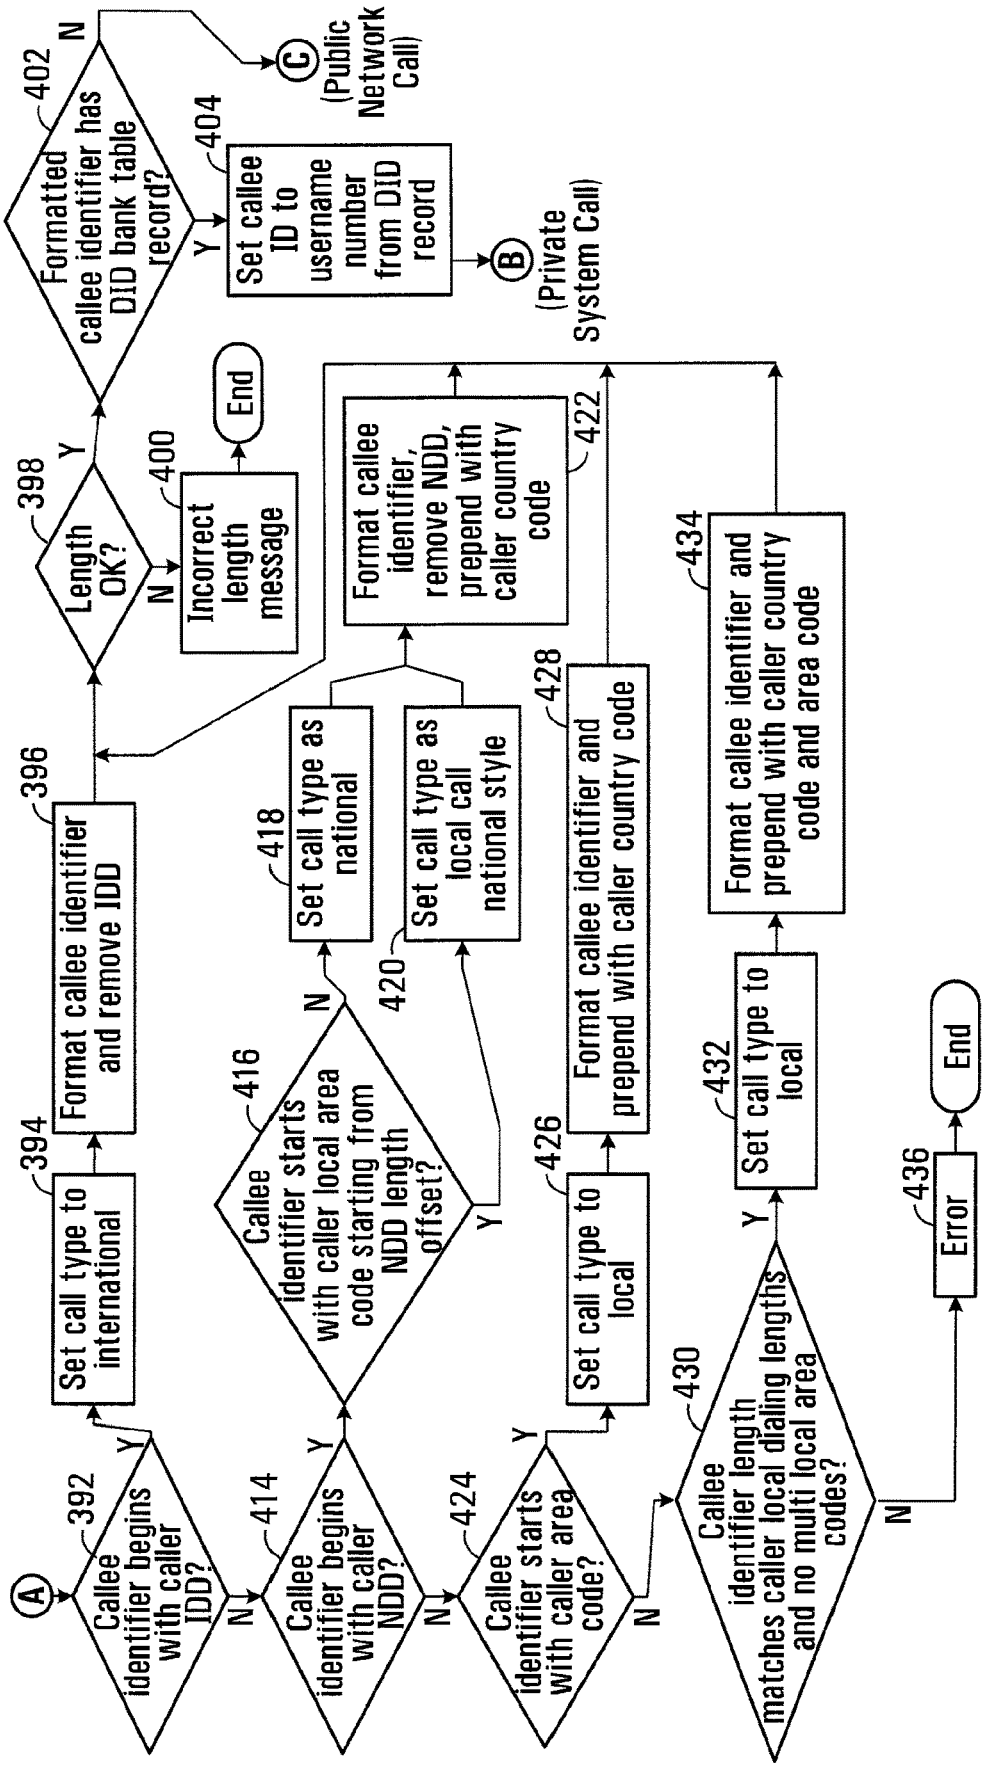
A
392
Callee identifier begins with caller IDD?
Y
N
394
Set call type to international
396
Format callee identifier and remove IDD
414
Callee identifier begins with caller NDD?
Y
N
416
Callee identifier starts with caller local area code starting from NDD length offset?
Y
N
418
Set call type as national
420
Set call type as local call national style
424
Callee identifier starts with caller area code?
Y
N
426
Set call type to local
428
Format callee identifier and prepend with caller country code
430
Callee identifier length matches caller local dialing lengths and no multi local area codes?
Y
N
432
Set call type to local
434
Format callee identifier and prepend with caller country code and area code
436
Error
End
398
Length OK?
Y
N
400
Incorrect length message
End
402
Formatted callee identifier has DID bank table record?
Y
N
404
Set callee ID to username number from DID record
B
(Private System Call)
C
(Public Network Call)
422
Format callee identifier, remove NDD, prepend with caller country code

FIG. 18B

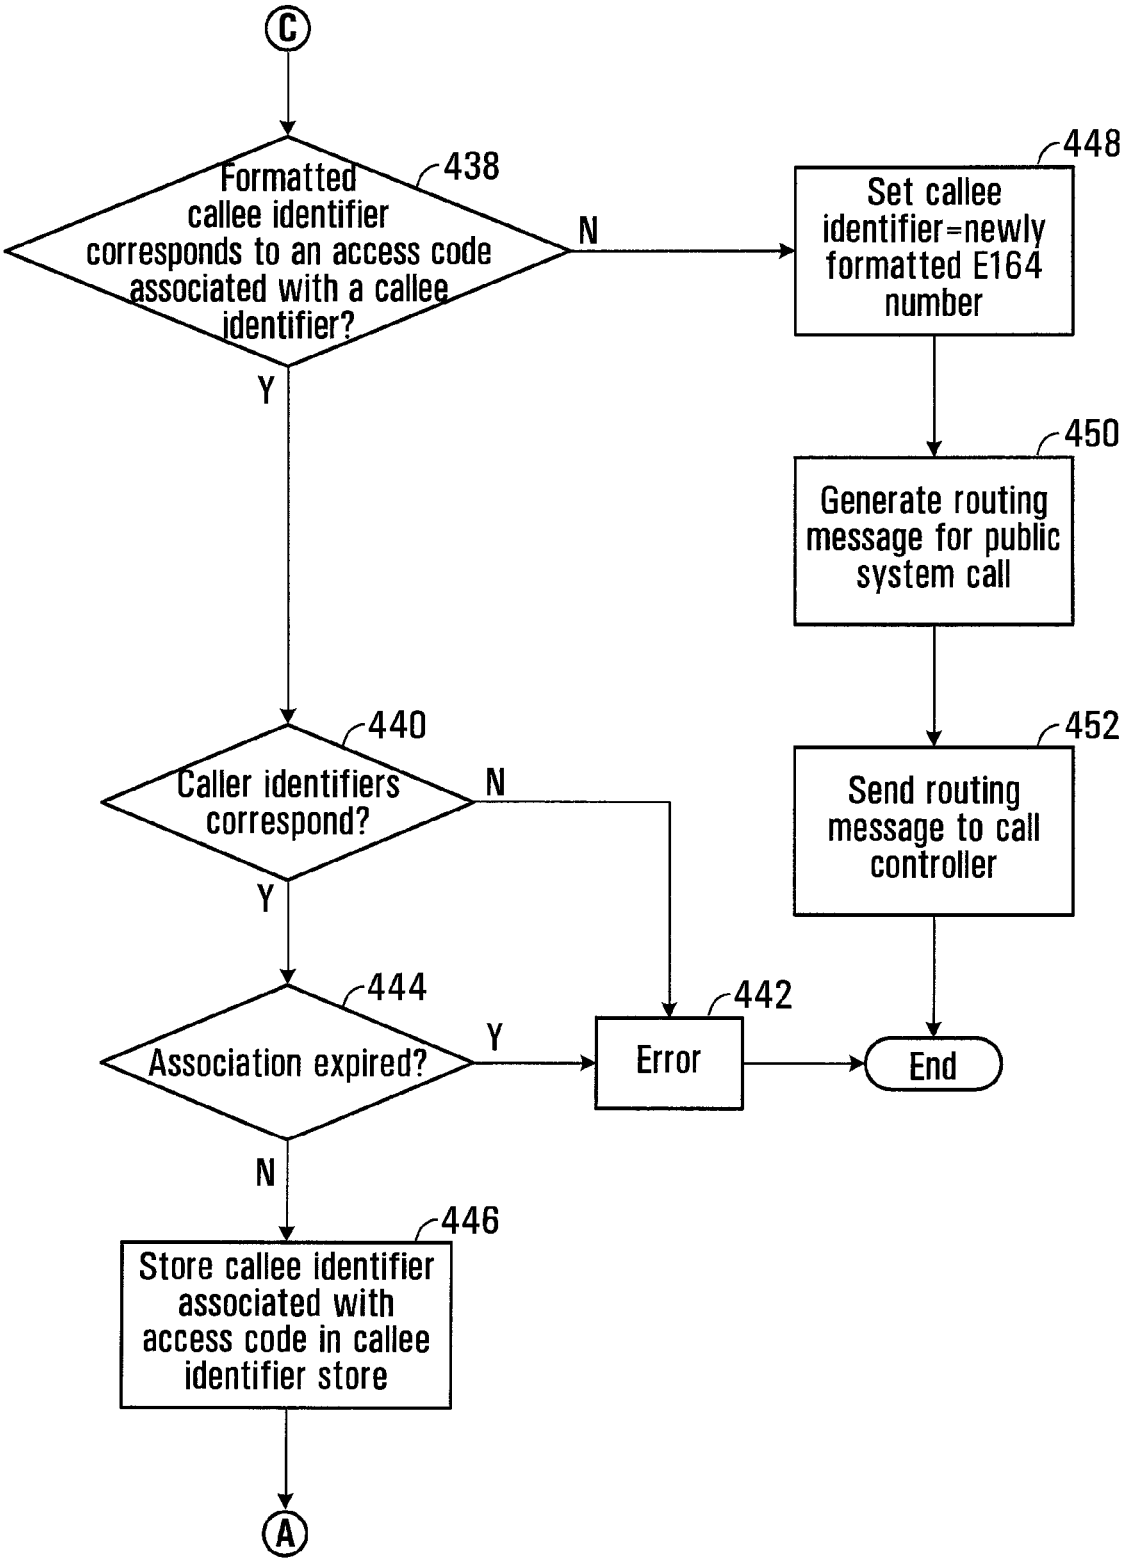
C
Formatted callee identifier corresponds to an access code associated with a callee identifier?
438
N
Y
448
Set callee identifier=newly formatted E164 number
450
Generate routing message for public system call
452
Send routing message to call controller
440
Caller identifiers correspond?
N
Y
444
Association expired?
Y
442
Error
End
N
446
Store callee identifier associated with access code in callee identifier store
A

FIG. 18C

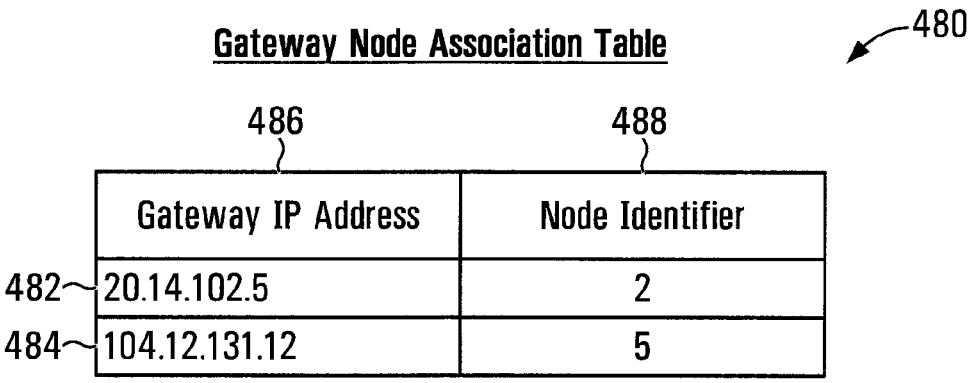
Gateway Node Association Table
480
486
488
Gateway IP Address
Node Identifier
482
20.14.102.5
2
484
104.12.131.12
5

FIG. 19

MOBILE GATEWAY

INCORPORATION BY REFERENCE TO ANY PRIORITY APPLICATIONS

This application is a continuation of U.S. application Ser. No. 13/056,277, filed Jan. 27, 2011, entitled "Mobile Gateway", which is a national phase entry of PCT/CA2009/001062, filed Jul. 28, 2009, which claims priority to U.S. Provisional Application No. 61/129,898, filed Jul. 28, 2008, all of which are incorporated by reference in their entireties.

BACKGROUND

Field

This invention relates generally to telecommunication, and more particularly to methods, systems, apparatuses, and computer readable media for initiating or enabling a call with a mobile telephone to a callee.

Description of the Related Technologies

Mobile telephone service providers often charge significant fees for long distance telephone calls, particularly when the mobile telephone is roaming in another mobile telephone service provider's network.

One known technique for avoiding the long distance charges of mobile telephone service providers is to use a "calling card". A "calling card" may permit the user of the mobile telephone to place a call to a local telephone number or to a less-expensive telephone number (such as a toll-free number, for example) instead of placing the call directly to the callee. The user may thus avoid the long distance charges of the mobile telephone service provider, which may be higher than the charges for using the "calling card". However, this technique can be cumbersome and undesirable, because it may require the user of the mobile telephone to follow a number of complicated or cumbersome steps in order to initiate a call to the callee, for example.

SUMMARY OF CERTAIN EMBODIMENTS

In accordance with one aspect there is provided a method of initiating a call to a callee using a mobile telephone. The method involves receiving, from a user of the mobile telephone, a callee identifier associated with the callee; transmitting an access code request message to an access server, the access code request message including the callee identifier; receiving an access code reply message from the access server in response to the access code request message, the access code reply message including an access code different from the callee identifier and associated with the callee identifier; and initiating a call with the mobile telephone using the access code to identify the callee.

Transmitting may involve transmitting the access code request message to the access server on a non-voice network.

Transmitting may involve transmitting a location identifier of a location associated with the mobile telephone to the access server.

Transmitting the location identifier may involve transmitting an IP address of the mobile telephone in a wireless IP network.

Transmitting the location identifier may involve transmitting an identifier of a wireless voice signal station in wireless communication with the mobile telephone.

Transmitting the location identifier may involve transmitting a user-configured identifier of a location associated with the mobile telephone.

Receiving the access code reply message may involve receiving the access code reply message from the access server on a non-voice network.

Receiving the access code reply message may involve receiving, in the access code reply message, an access code temporarily associated with the callee identifier.

Receiving the access code reply message may involve receiving, in the access code reply message, a telephone number identifying a channel operably configured to cooperate with an IP network to cause a call involving the mobile telephone and the callee to be routed through the IP network.

Initiating the call may involve engaging a routing controller to route the call on the IP network to the callee.

The method may further involve: receiving from the mobile telephone the access code request message; communicating with a routing controller to obtain from the routing controller the access code wherein the access code identifies a channel and is useable by the mobile telephone to cause the routing controller to establish a call to the callee using the channel; and transmitting the access code reply message to the mobile telephone.

In accordance with another aspect, there is provided a mobile telephone. The mobile telephone includes: provisions for receiving, from a user of the mobile telephone, a callee identifier associated with the callee; transmitting provisions for transmitting an access code request message to an access server, the access code request message including the callee identifier; provisions for receiving an access code reply message from the access server in response to the access code request message, the access code reply message including an access code different from the callee identifier and associated with the callee identifier; and provisions for initiating a call using the access code to identify the callee.

The transmitting provisions may include a non-voice network interface for transmitting the access code request message to the access server on a non-voice network.

The access code request message may further include a location identifier of a location associated with the mobile telephone.

The location identifier may include an IP address of the mobile telephone in a wireless IP network.

The location identifier may include an identifier of a wireless voice signal station in wireless communication with the mobile telephone.

The location identifier may include a user-configured identifier of a location associated with the mobile telephone.

The provisions for receiving an access code reply message may include a non-voice network interface for receiving the access code reply message on a non-voice network.

The access code may include a telephone number.

The means for initiating may involve a mobile telephone network interface.

In accordance with another aspect, there is provided a system for initiating a call to a callee. The system includes the mobile telephone, a routing controller, and an access server. The access server includes: provisions for receiving from the mobile telephone the access code request message; provisions for communicating with the routing controller to obtain from the routing controller the access code wherein the access code identifies a channel and is useable by the mobile telephone to cause the routing controller to establish a call to the callee using the channel; and provisions for transmitting the access code reply message including the access code to the mobile telephone.

In accordance with another aspect, there is provided a mobile telephone. The mobile telephone includes a processor circuit, a network interface in communication with the

processor circuit, and a computer readable medium in communication with the processor circuit and encoded with codes for directing the processor circuit to: receive, from a user of the mobile telephone, a callee identifier associated with the callee; cause an access code request message to be transmitted to an access server, the access code request message including the callee identifier; receive an access code reply message from the access server in response to the access code request message, the access code reply message including an access code different from the callee identifier and associated with the callee identifier; and initiate a call using the access code to identify the callee.

The network interface may include a non-voice network interface, and the codes for directing the processor circuit to cause the access code request message to be transmitted may include codes for directing the processor circuit to cause the access code request message to be transmitted to the access server using the non-voice network interface on a non-voice network.

The access code request message may further include a location identifier of a location associated with the mobile telephone.

The location identifier may include an IP address of the mobile telephone in a wireless IP network.

The location identifier may include an identifier of a wireless voice signal station in wireless communication with the mobile telephone.

The location identifier may include a user-configured identifier of a location associated with the mobile telephone.

The network interface may include a non-voice network interface, and the codes for directing the processor circuit to receive an access code reply message may include codes for directing the processor circuit to cause the access code reply message to be received from the access server using the non-voice network interface on a non-voice network.

The access code may include a telephone number identifying a channel operably configured to cooperate with an IP network to cause a call involving the mobile telephone and the callee to be routed through the IP network.

The network interface may include a mobile telephone network interface, and the codes for directing the processor circuit to initiate may include codes for directing the processor circuit to cause a call to be initiated using the mobile telephone network interface on a mobile telephone network.

In accordance with another aspect, there is provided a system for initiating a call to a callee. The system includes: the mobile telephone; a routing controller; and an access server comprising a processor circuit and a computer readable medium in communication with the processor circuit. The computer readable medium is encoded with codes for directing the processor circuit to: receive from the mobile telephone the access code request message; communicate with the routing controller to obtain from the routing controller the access code wherein the access code identifies a channel and is useable by the mobile telephone to cause the routing controller to establish a call to the callee using the channel; and transmit the access code reply message to the mobile telephone.

In accordance with another aspect, there is provided a computer readable medium encoded with codes for directing a processor circuit to: receive, from a user of a mobile telephone, a callee identifier associated with a callee; transmit an access code request message to an access server, the access code request message including the callee identifier; receive an access code reply message from the access server in response to the access code request message, the access code reply message including an access code different from the callee identifier and associated with the callee identifier; and initiate a call using the access code to identify the callee.

In accordance with another aspect, there is provided a method for enabling a mobile telephone to initiate a call to a callee through a channel. The method involves: receiving from the mobile telephone an access code request message including a callee identifier associated with the callee; communicating with a routing controller to obtain from the routing controller an access code identifying the channel, the access code being different from the callee identifier and useable by the mobile telephone to initiate a call to the callee using the channel; and transmitting an access code reply message including the access code to the mobile telephone.

Receiving may involve receiving the access code request message on a non-voice network.

The method may further involve causing the routing controller to produce the access code.

Producing may involve selecting the access code from a pool of access codes, where each access code in the pool of access codes identifies a respective telephone number.

The method may further involve determining a local calling area associated with the mobile telephone.

Determining may involve accessing a dialing profile associated with the caller, the dialing profile including a location field having contents identifying at least a default location of the caller.

Determining may involve receiving an IP address of the mobile telephone in a wireless IP network.

Determining may involve receiving an identifier of a wireless voice signal station in wireless communication with the mobile telephone.

Determining may involve receiving a user-configured identifier of a location associated with the mobile telephone.

Selecting may involve selecting an access code in the local calling area associated with the mobile telephone.

Each access code in the pool of access codes may further identify a respective channel operably configured to cooperate with an IP network to cause a call involving the mobile telephone and the callee to be routed through the IP network.

The method may further involve causing the routing controller to establish communication through the IP network in response to a call received on the channel.

Producing may further involve storing a caller identifier associated with the mobile telephone in association with the access code.

Causing the routing controller to establish communication may involve causing the routing controller to establish communication only if the caller identifier associated with the access code identifies the mobile telephone.

Producing may further involve storing the callee identifier in association with the access code.

Producing may further involve searching the pool of access codes for an access code associated with the callee identifier to identify the channel usable by the mobile telephone to initiate a call to the callee.

Producing may further involve storing, in association with the access code, a timestamp for use in determining when the usability of the access code to initiate a call to the callee will expire.

Causing the routing controller to establish communication may involve causing the routing controller to establish communication only if the usability of the access code to initiate a call to the callee has not expired.

Transmitting may involve transmitting the access code reply message on a non-voice network.

In accordance with another aspect, there is provided a system for enabling a mobile telephone to initiate a call to

a callee through a channel. The system includes: provisions for receiving from the mobile telephone an access code request message including a callee identifier associated with the callee; provisions for communicating with the routing controller to obtain from the routing controller an access code identifying the channel, the access code being different from the callee identifier and useable by the mobile telephone to initiate a call to the callee using the channel; and provisions for transmitting an access code reply message including the access code to the mobile telephone.

The provisions for receiving may include a non-voice network interface for receiving the access code request message on a non-voice network.

The system may further include provisions for producing the access code.

The provisions for producing may include a processor circuit operably configured to select the access code from a pool of access codes, where each access code in the pool of access codes identifies a respective telephone number.

The processor circuit may be operably configured to determine a local calling area associated with the mobile telephone.

The processor circuit may be operably configured to determine a local calling area associated with the mobile telephone using a dialing profile associated with the caller, the dialing profile including a location field having contents identifying at least a default location of the caller.

The processor circuit may be operably configured to determine a local calling area associated with the mobile telephone using an IP address of the mobile telephone in a wireless IP network.

The processor circuit may be operably configured to determine a local calling area associated with the mobile telephone using an identifier of a wireless voice signal station in wireless communication with the mobile telephone.

The processor circuit may be operably configured to determine a local calling area associated with the mobile telephone using a user-configured identifier of a location associated with the mobile telephone.

The processor circuit may be operably configured to select an access code in the local calling area associated with the mobile telephone.

Each access code in the pool of access codes may further identify a respective channel operably configured to cooperate with an IP network to cause a call involving the mobile telephone and the callee to be routed through the IP network.

The processor circuit may be operably configured to establish communication through the IP network in response to a call received on the channel.

The processor circuit may be operably configured to store a caller identifier associated with the mobile telephone in association with the access code.

The processor circuit may be operably configured to cause the routing controller to establish communication only if the caller identifier associated with the access code identifies the mobile telephone.

The processor circuit may be operably configured to store the callee identifier in association with the access code.

The processor circuit may be operably configured to search the pool of access codes for an access code associated with the callee identifier to identify the channel usable by the mobile telephone to initiate a call to the callee.

The processor circuit may be operably configured to store, in association with the access code, a timestamp for use in determining when the usability of the access code to initiate a call to the callee will expire.

The processor circuit may operably configured to establish communication only if the usability of the access code to initiate a call to the callee has not expired.

The provisions for transmitting may include a non-voice network interface for transmitting the access code reply message on a non-voice network.

In accordance with another aspect, there is provided a system for enabling a mobile telephone to initiate a call to a callee through a channel. The system includes a processor circuit, a network interface in communication with the processor circuit, and a computer readable medium in communication with the processor circuit and encoded with codes for directing the processor circuit to: receive from the mobile telephone an access code request message including a callee identifier associated with the callee; communicate with the routing controller to obtain from the routing controller an access code identifying the channel, the access code being different from the callee identifier and useable by the mobile telephone to initiate a call to the callee using the channel; and cause an access code reply message including the access code to be transmitted to the mobile telephone.

The network interface may include a non-voice network interface, and the codes for directing the processor circuit to receive may include codes for directing the processor circuit to cause the access code request message to be received using the non-voice network interface on a non-voice network.

The computer readable medium may be further encoded with codes for directing the processor circuit to cause the access code to be produced.

The codes for directing the processor circuit to cause the access code to be produced may cause the access code to be selected from a pool of access codes, where each access code in the pool of access codes identifies a respective telephone number.

The computer readable medium may be further encoded with codes for directing the processor circuit to cause to be determined a local calling area associated with the mobile telephone.

The codes for directing the processor circuit to cause to be determined may cause a dialing profile associated with the caller to be accessed, the dialing profile including a location field having contents identifying at least a default location of the caller.

The codes for directing the processor circuit to cause to be determined may cause to be received an IP address of the mobile telephone in a wireless IP network.

The codes for directing the processor circuit to cause to be determined may cause to be received an identifier of a wireless voice signal station in wireless communication with the mobile telephone.

The codes for directing the processor circuit to cause to be determined may cause to be received a user-configured identifier of a location associated with the mobile telephone.

The codes for directing the processor circuit to cause the access code to be produced may further cause to be selected an access code in the local calling area associated with the mobile telephone.

Each access code in the pool of access codes may further identify a respective channel operably configured to cooperate with an IP network to cause a call involving the mobile telephone and the callee to be routed through the IP network.

The computer readable medium may be further encoded with codes for directing the processor circuit to cause communication through the IP network to be established in response to a call received on the channel.

The codes for directing the processor circuit to cause the access code to be produced may cause a caller identifier associated with the mobile telephone to be stored in association with the access code.

The codes for directing the processor circuit to cause communication to be established may cause communication to be established only if the caller identifier associated with the access code identifies the mobile telephone.

The codes for directing the processor circuit to cause the access code to be produced may cause the callee identifier to be stored in association with the access code.

The codes for directing the processor circuit to cause the access code to be produced may cause the pool of access codes to be searched for an access code associated with the callee identifier to identify the channel usable by the mobile telephone to initiate a call to the callee.

The codes for directing the processor circuit to cause the access code to be produced may cause a timestamp for use in determining when the usability of the access code to initiate a call to the callee will expire, to be stored in association with the access code.

The codes for directing the processor circuit to cause communication to be established may cause communication to be established only if the usability of the access code to initiate a call to the callee has not expired.

The network interface may include a non-voice network interface, and the codes for directing the processor circuit to transmit include codes for directing the processor circuit to cause the access code reply message to be transmitted using the non-voice network interface on a non-voice network.

In accordance with another aspect, there is provided a computer readable medium encoded with codes for directing a processor circuit to: receive from the mobile telephone an access code request message including a callee identifier associated with the callee; communicate with the routing controller to obtain from the routing controller an access code identifying the channel, the access code being different from the callee identifier and useable by the mobile telephone to initiate a call to the callee using the channel; and cause an access code reply message including the access code to be transmitted to the mobile telephone.

Other aspects and features will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

In drawings which illustrate embodiments,

FIG. **1** is a block diagram of a system for enabling a mobile telephone to initiate a call through a channel to a callee in accordance with a first embodiment in the invention;

FIG. **2** is a block diagram of mobile telephone shown in FIG. **1**;

FIG. **3** is a flow chart of a process executed by the mobile telephone shown in FIG. **1**;

FIG. **4** is a schematic representation of an access code request message transmitted between the mobile telephone and an access server shown in FIG. **1**;

FIG. **5** is a schematic representation of an access code reply message transmitted between the mobile telephone and the access server shown in FIG. **1**;

FIG. **6** is a block diagram of the access server shown in FIG. **1**;

FIG. **7** is a flow chart of a process executed by the access server shown in FIG. **1**;

FIG. **8** is a block diagram of a routing controller shown in FIG. **1**;

FIG. **9** is a tabular representation of a dialing profile stored in a database accessible by the routing controller illustrated in FIG. **1**;

FIG. **10** is a tabular representation of an access code association table stored in memory accessible by the routing controller shown in FIG. **1**;

FIG. **11** is a schematic representation of a DID bank table record stored in a database shown in FIG. **1**;

FIG. **12** is a flow chart of a process executed by the routing controller illustrated in FIG. **1**;

FIG. **13** is a block diagram of a gateway shown in FIG. **1**;

FIG. **14** is a tabular representation of an SIP invite message transmitted between the gateway and a call controller illustrated in FIG. **1**;

FIG. **15** is a block diagram of the call controller illustrated in FIG. **1**;

FIG. **16** is a flow chart of a process executed by the call controller illustrated in FIG. **1**;

FIG. **17** is a tabular representation of an RC request message transmitted between the call controller and the routing controller illustrated in FIG. **1**;

FIGS. **18**A-**18**C are a flow chart of a process executed by the routing controller illustrated in FIG. **1**; and

FIG. **19** is a tabular representation of a gateway node association table stored in the database illustrated in FIG. **1**.

DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

Referring to FIG. **1**, a system for enabling a mobile telephone to initiate a call to a callee is shown generally at **10**. The system **10** includes a first node **11**, a second node **21**, and a mobile telephone **12**.

The first and second nodes **11** and **21** in the illustrated embodiment may support "voice-over-IP" (VoIP) calls between telephones and/or videophones using the Internet Protocol (IP), as described in PCT Publication No. WO 2008/052340, which is hereby incorporated by reference in its entirety herein. In the embodiment shown, the first node **11** is located in a geographical area, such as Vancouver, British Columbia, Canada, for example, and the second node **21** is located in London, England, for example. Different nodes may be located in different geographical regions throughout the world to provide telephone/videophone service to subscribers in respective regions. These nodes may be in communication with each other by high speed/high data throughput links including optical fiber, satellite, and/or cable links illustrated generally at **17**, forming a backbone to the system. These nodes may alternatively, or in addition, be in communication with each other through conventional internet services.

In the embodiment shown, the first node **11** provides telephone/videophone service to western Canadian customers from Vancouver Island to Ontario. Another node (not shown) may be located in Eastern Canada to provide services to subscribers in that area, for example.

Other nodes of the type shown may also be employed within the geographical area serviced by a node to provide for call load sharing, for example, within a region of the geographical area serviced by the node. However, in general, all nodes may be similar and have the properties described in connection with the first node **11**.

In this embodiment, the first node **11** includes a call controller (CC) **13**, an access server **14**, a routing controller (RC) **30**, a database **23**, a voicemail server **19**, and a media

relay **28**. Each of these may be implemented as separate modules on a common computer system or by separate computers, for example. The voicemail server **19** need not be included in the node and can be provided by a third party service provider. Although the access server **14** is illustrated as being part of the first node **11**, access servers in alternative embodiments may be separate from the node and may be in communication with one or more nodes, for example.

The mobile telephone **12** is configured to place calls over a mobile telephone network, illustrated generally at **15**, in a manner well-known in the art. Furthermore, the mobile telephone **12** and the access server **14** are configured to communicate with each other, preferably on a non-voice network illustrated generally at **16**, such as a "WiFi" wireless IP network or a General Packet Radio Service (GPRS) network, for example. However, in alternative embodiments, the mobile telephone **12** and the access server **14** may communicate with each other over other networks, such as a mobile telephone network using Short Message Service (SMS) messages, for example.

The system **10** further includes a gateway **18** in communication with at least one, and preferably a plurality of, channels, which are illustrated schematically at **20**, **22**, and **24**, to which the mobile telephone **12** may initiate a call over the mobile telephone network **15**. The channels **20**, **22**, and **24** maybe telephone lines in a Public Switched Telephone Network (PSTN) **29**. The channels **20**, **22**, and **24** maybe associated with PSTN telephone numbers in a local calling area associated with the mobile telephone **12**, and thus these channels preferably depend on a geographical location of the mobile telephone. The expression "local calling area" herein refers generally to a set of telephone numbers, typically defined by a geographical region, to which telephone calls may be placed by callers within the local calling area at either no additional charge or at a lower additional charge than would be required for calls to numbers that are outside of the local calling area. However, it will be appreciated that in other embodiments, the gateway **18** may be in communication with any number of channels, which need not be PSTN telephone lines. Also, in the illustrated embodiment, the channels **20**, **22**, and **24** are associated with telephone numbers for Vancouver, British Columbia, Canada and the surrounding area, although it will be appreciated that these channels may include PSTN telephone lines associated with other areas, for example, which may not necessarily be in a local calling area associated with the mobile telephone **12**.

In the illustrated embodiment, each of the channels **20**, **22**, and **24** is configured by a PSTN service provider (which, in Canada, may be Bell Canada or Telus, for example) to direct calls that are received on the channels to the gateway **18**. In the illustrated embodiment, the PSTN service provider has configured the channels **20**, **22**, and **24** to communicate with a T1 multiplexer **25**, which multiplexes the channels **20**, **22**, and **24** in a manner known in the art onto one or more T1 lines **27** that are in communication with the gateway **18**. The gateway **18** is in communication with an IP network shown generally at **26**. The channels **20**, **22**, and **24** are thus configured to cooperate with the IP network **26** (via the gateway **18** in the illustrated embodiment) to cause a call involving the mobile telephone **12** and the callee to be routed through the IP network in response to a call received at one of the channels.

Also, in the illustrated embodiment, the access server **14** is in communication with the routing controller **30** of the first node **11**, and the routing controller **30** is configurable to associate a callee identifier with one of the channels **20**, **22**, and **24**, as described below. A callee identifier associated with one of the channels **20**, **22**, and **24** may be a telephone number of a PSTN telephone **32** that is in communication with the IP network **26** through a gateway **34**, or it may be a telephone number of a VoIP telephone **36** that is directly in communication with the IP network **26**, for example. Other routing controllers **30** of other nodes, such as the second node **21**, for example, may also associate callee identifiers with other channels that are in communication with other gateways (not shown).

Mobile Telephone

Referring to FIG. **2**, in this embodiment, the mobile telephone (**12**) includes a processor circuit shown generally at **50**. The processor circuit **50** includes a microprocessor **52**, a program memory **54**, an input/output (I/O) port **56**, parameter memory **58**, and temporary memory **60**. The program memory **54**, I/O port **56**, parameter memory **58**, and temporary memory **60** are all in communication with the microprocessor **52**. The processor circuit **50** may alternatively include a plurality of processors, a plurality of program memories, a plurality of temporary memories, and/or a plurality of I/O ports, or these components may alternatively be combined into a single device. However, for simplicity, the components of the processor circuit **50** are illustrated as shown in the example of FIG. **2**.

In the illustrated embodiment, the I/O port **56** includes a dialing input **62** for receiving a callee identifier from a key pad, for example, or from a voice recognition unit, or from pre-stored callee identifiers stored in the parameter memory **58**, for example. For illustration purposes only, a myriad of possible dialing functions for providing a callee identifier are represented by the block entitled dialing function **64**. A callee identifier may be a telephone number of a callee, for example.

The I/O port **56** also includes a handset interface **66** for receiving and producing signals to and from a handset **68** that may be placed close to the user's ear and mouth, for producing and receiving audible signals for and from the user. It will be appreciated that alternatively, the handset **68** may include a camera and video screen, for example, and that video or other types of signals may be transmitted additionally or alternatively to audible signals.

The I/O port **56** also includes a non-voice network interface **70** for transmitting information to, and receiving information from, the non-voice network **16** illustrated in FIG. **1**, for example, and preferably interfaces with a high-speed internet connection.

The I/O port **56** in the illustrated embodiment further includes a mobile telephone network interface **72** for transmitting signals to and receiving signals from a mobile telephone service provider over a network such as a Global System for Mobile communications (GSM) or a Code Division Multiple Access (CDMA) network, such as the mobile telephone network **15** illustrated in FIG. **1**, for example. Again, for simplicity, a mobile telephone network interface is illustrated, although it will be appreciated that video signals or other signals may be handled similarly when the mobile telephone (**12**) is facilitating communication of one or more of these types of signals. It will also be appreciated that alternatively, the non-voice network interface **70** and mobile telephone network interface **72** need not be distinct, but may be a single interface for communication over a single network, for example, or may be configured to communicate over a plurality of different networks, for example.

In the illustrated embodiment, the parameter memory **58** includes a username field **74** and a password field **76**, although it will be appreciated that the username and pass-

word may not be necessary, or may be input by the user as required, for example. The parameter memory **58** in the illustrated embodiment also includes a caller identifier field **78** for storing a caller identifier, which may be a telephone number associated with the mobile telephone (**12**) for identifying a "channel" such as a telephone line assigned to the mobile telephone that may be used to call back to the mobile telephone, for example. Generally, the contents of the username field **74**, the password field **76**, and the caller identifier field **78** are set once when the user first subscribes to the system.

The usernames referred to herein, such as the username in the username field **74**, preferably include a twelve digit number such as 2001 1050 8667, for example, wherein the left-most digit is a continent code (such as "2" to indicate North America, for example), followed by a three-digit country code (such as "001" to indicate Canada and the United States, for example), a four-digit dealer code (such as "1050", for example), and a unique four-digit number code (such as "8667", for example), as discussed more generally in PCT Publication No. 2008/052340. Therefore, a prefix of a username referred to herein preferably indicates a geographical region associated with the user, or with the access code, and more preferably indicates a node associated with the user or access code.

The program memory **54** stores blocks of codes for directing the microprocessor **52** to carry out the functions of the mobile telephone (**12**), which are illustrated by example below.

Referring to FIGS. **2** and **3**, a flow chart representing functions performed by blocks of code that direct the microprocessor **52** to initiate a call with the mobile telephone **12** to a callee is shown generally at **100**. The blocks shown in FIG. **3** generally represent codes that may be stored in the program memory **54** for example, for directing the microprocessor **52** to perform various functions relating to initiating a call with the mobile telephone (**12**) to a callee. The actual code to implement each block may be written in any suitable programming language, such as Java, C, and/or C++, for example.

The process **100** begins at **102**, in response to an interrupt produced at or for the microprocessor **52** by the dialing function **64**. Upon initiation of the process **100**, block **104** directs the microprocessor **52** to obtain a callee identifier from the dialing function **64** at the dialing input **62** of the I/O port **56** in the illustrated embodiment. The callee identifier is associated with a desired callee, and may be a telephone number of the callee, for example. The microprocessor **52** thus receives, from a user of the mobile telephone (**12**), a callee identifier associated with a callee.

Block **106** directs the microprocessor **52** to transmit, using the non-voice network interface **70** in the illustrated embodiment, an access code request message, the access code request message including the callee identifier obtained at block **104**, to the access server **14** (illustrated in FIG. **1**). In general, preferably block **106** directs the microprocessor **52** to cause an access code request message to be transmitted to the access server **14** over a non-voice network, such as an internet, using WiFi or GPRS technology for example. However, it will be appreciated that block **106** may direct the microprocessor **52** to transmit an access code request message to the access server **14** using any suitable technique, which may alternatively include a voice network, for example.

Referring to FIG. **4**, an exemplary access code request message is shown generally at **110**. The access code request message **110** includes a username field **112**, a password field **114**, a callee identifier field **116**, and a caller identifier field **118**. In the illustrated embodiment, values for the username, password, and caller identifier fields **112**, **114**, and **118** are retrieved from the username, password, and caller identifier fields **74**, **76**, and **78** respectively in the parameter memory **58** of the processor circuit **50** (illustrated in FIG. **2**), and a value for the callee identifier field **116** is obtained from the dialing function **64** in block **104**, and may be stored in the temporary memory (**60**), for example. It will be appreciated that the username field **112**, password field **114**, and caller identifier field **118** are not essential, although these fields are preferable in order to identify the user of the mobile telephone for billing purposes, for example.

Referring to FIGS. **1** and **4**, it will be appreciated that in order to minimize charges from the mobile telephone service provider of the mobile telephone **12**, the channels **20**, **22**, **24** will preferably be local or relatively inexpensive telephone lines associated with a geographical location, more particularly a pre-defined local calling area, associated with the mobile telephone **12**. Therefore, the exemplary access code request message **110** further includes a location identifier field **119**. The location identifier stored in the location identifier field **119** preferably identifies a location of the mobile telephone **12** for use in determining a local calling area associated with the mobile telephone **12**.

For example, the location identifier in the location identifier field **119** may include an IP address of the mobile telephone **12** in a wireless IP network, such as the non-voice network **16** to which the non-voice network interface **70** shown in FIG. **2** is connected, because this IP address may be an indicator of a geographical location of the mobile telephone **12**. The location identifier may also or alternatively include an identifier of a wireless voice signal station in wireless communication with the mobile telephone. In the illustrated embodiment, the wireless voice signal station is part of the mobile telephone network **15** that is in communication with the mobile telephone **12** through the mobile telephone network interface **72** illustrated in FIG. **2**. In still other embodiments, the location identifier may include a user-configured identifier of a geographical location or local calling area where the mobile telephone **12** is or may be situated. The location identifier may thus be pre-determined and stored in the parameter memory **58** shown in FIG. **2** or may be acquired from non-voice network or wireless voice signal station or from user input, for example. Therefore, in summary, the location identifier in the location identifier field **119** may include one or more of an IP address of the mobile telephone **12** in a wireless IP network, an identifier of a wireless voice signal station in wireless communication with the mobile telephone, and a user-configured identifier.

As described below, the location identifier in the location identifier field **119** may be used to determine a local calling area associated with the mobile telephone **12**, within which local calling area channels (illustrated as **20**, **22**, and **24** in FIG. **1**) are available to the mobile telephone **12** for the lowest cost to the user. However, it will be appreciated that the location identifier may only approximately identify a local calling area, and may not necessarily identify the lowest cost channel (illustrated as **20**, **22**, and **24** in FIG. **1**) for the mobile telephone **12**. It will also be appreciated that in other embodiments, the location identifier field **119** may be omitted.

Referring back to FIG. **3**, the process **100** continues at block **130**, which directs the microprocessor (**52**) to receive an access code reply message from the access server (**14**) in response to the access code request message that was transmitted at block **106**.

Referring to FIG. **5**, an exemplary access code reply message is shown generally at **140**. The access code reply message **140** includes an access code field **142** and a timeout field **144**. In the illustrated embodiment, the access code field **142** stores an access code which is a telephone number associated with a telephone line associated with one of the channels **20**, **22**, or **24** in FIG. **1**. It will be appreciated that the access code is different from the callee identifier in the callee identifier field **116** shown in FIG. **4**, in that the access code identifies a channel, other than that provided by the callee identifier provided by the dialing function **64** in FIG. **2**, that the mobile telephone (**12**) can use to initiate a call to the callee. It will be appreciated that use of the access code facilitates avoidance of long distance or roaming charges that a mobile telephone service provider would charge for a call placed directly using the callee identifier using conventional calling processes, for example.

Still referring to FIG. **5**, the timeout field **144** in the illustrated embodiment stores a value that indicates a period of time, for example a number of minutes, during which the access code in the access code field **142** is associated with the callee identifier in the callee identifier field **116** of the exemplary access code request message **110** illustrated in FIG. **4**, such that the access code is only temporarily associated with the callee identifier. In one embodiment, the value stored in the timeout field **144** indicates 10 minutes, for example. It will be appreciated that in other embodiments, the timeout field **144** may not be necessary, but preferably it is included.

In the illustrated embodiment, the program codes in block **130** direct the microprocessor **52** to receive the access code reply message over a non-voice network, such as a WiFi or GPRS network (illustrated at **16** in FIG. **1**) via the non-voice network interface **70** shown in FIG. **2**. However, it will be appreciated that the access code reply message may be received on any suitable network, even a voice network, for example.

Referring back to FIGS. **2** and **3**, block **149** directs the microprocessor **52** to initiate a call with the mobile telephone (**12**) on the mobile telephone network **15** (illustrated in FIG. **1**) using the access code received in the access code field **142** of the access code reply message **140** (shown in FIG. **5**) to identify the callee. In the illustrated embodiment, the codes in block **149** direct the microprocessor **52** to initiate a call to the channel (**20**, **22**, or **24**) identified by the access code, using the mobile telephone network interface **72** of the I/O port **56** of the mobile telephone (**12**), to engage the mobile telephone network (**15**).

Referring to FIG. **1**, in the embodiment shown, the access code in the access code field (**142**) is a telephone number identifying a channel **20**, **22**, or **24** that is in communication with the gateway **18** to the IP network **26**. Through the gateway **18**, the channel **20**, **22**, or **24** is thus operably configured to cooperate with the IP network **26** to cause a call from the mobile telephone **12** to the callee to be routed through the IP network. Routing the call through the IP network may involve engaging the routing controller **30** to route the call on the IP network **26** to the callee, as described below. However, it will be appreciated that in other embodiments, the access code need not be a telephone number, but may be any code identifying a channel through which the mobile telephone **12** can initiate a call. Alternatively, if the mobile telephone is capable of voice over IP communications, the access code may be used to identify an IP address in the IP network to which the call is routed. In this embodiment, the IP address may act as the access code. The process **100** shown in FIG. **3** is then ended.

Access Server

Referring to FIG. **6**, the access server (**14**) includes a processor circuit shown generally at **150**. The processor circuit **150** includes a microprocessor **152**, program memory **154**, an I/O port **156**, parameter memory **158**, and temporary memory **160**. The program memory **154**, I/O port **156**, parameter memory **158**, and temporary memory **160** are all in communication with the microprocessor **152**. The processor circuit **150** may alternatively include a plurality of microprocessors or I/O ports, for example, and the components of the illustrated processor circuit **150** may also alternatively be combined into a single device.

The program memory **154** stores blocks of codes for directing the microprocessor **152** to carry out the functions of the access server **14**. The I/O port **156** includes a non-voice network interface **162** for communicating with the non-voice network **16** illustrated in FIG. **1**. The I/O port **156** also includes a routing controller interface **164** for interfacing with the routing controller **30** illustrated in FIG. **1**.

Referring to FIGS. **6** and **7**, a flow chart of blocks of code for directing the microprocessor **152** of the access server (**14**) to provide an access code to the mobile telephone (**12**) is shown generally at **190**. The blocks **190** in FIG. **7** generally represent codes that may be stored in the program memory **154** for directing the microprocessor **152** to perform various functions to provide the access to the mobile telephone (**12**) to enable the mobile telephone to place a call through a channel (**20**, **22**, or **24**).

The process **190** begins at **192**, in response to an interrupt created by or for the microprocessor **152** when it receives an access code request message **110** (as illustrated in FIG. **4**) from the mobile telephone (**12**). In the illustrated embodiment, the access code request message (**110**) is received via the non-voice network interface **162** through a non-voice network (**16**) such as a WiFi or GPRS network, for example. However, it will be appreciated that other embodiments may use different techniques for receiving the access code request message (**110**) from the mobile telephone (**12**).

The process **190** continues at block **196**, which directs the microprocessor **152** to communicate with the routing controller **30** to obtain from the routing controller an access code identifying a channel (illustrated as **20**, **22**, or **24** in FIG. **1**) in communication with the gateway (**18**), wherein the access code is different from the callee identifier in the callee identifier field **116** (shown in FIG. **4**) and is usable by the mobile telephone (**12**) to initiate a call to the callee using the channel, as further described below. Therefore, block **196** preferably causes an access code to be produced by retransmitting the access code request message **110** illustrated in FIG. **4** that was received at **192** from the mobile telephone (**12**), to the routing controller **30** through the routing controller interface **164** of the I/O port **156**.

The process **190** continues at block **198**, which directs the microprocessor **152** to transmit an access code reply message (**140**), including the access code obtained by block **196**, to the mobile telephone (**12**). An exemplary access code reply message is shown in FIG. **5**. In the illustrated embodiment, an access code reply message (**140**) is produced by the routing controller **30** in a manner described below in response to the access code request message (**110**) that was transmitted to the routing controller at block **196**, and the access code reply message (**140**) is received from the routing controller through the routing controller interface **164** of the I/O port **156**. Block **198** then causes the access code reply message that was received from the routing controller to be retransmitted to the mobile telephone (**12**). In the illustrated

embodiment, the codes in block **198** direct the microprocessor **152** to transmit the access code reply message (**140**) using the non-voice network interface **162** to the non-voice network **16**, which may be a WiFi or GPRS network, for example. However, it will be appreciated that other embodiments may employ other types of networks for communicating the access code reply message (**140**) to the mobile telephone (**12**). The process **190** is then ended.

In summary, referring to FIG. **1**, the access server **14** generally acts as an interface to the routing controller **30** for relaying access code request messages and access code reply messages between the mobile telephone **12** and the routing controller. Therefore, it will be appreciated that in alternative embodiments, the access server **14** and the routing controller **30** need not be separate, but may, for example, be combined in a single component.

Routing Controller (RC)

Referring to FIG. **1**, generally, the routing controller **30** executes a process to facilitate communication between callers and callees. The function of a routing controller generally in a VoIP system is described in PCT Publication No. WO 2008/052340.

Referring to FIG. **8**, the routing controller (**30**) includes a processor circuit shown generally at **230**. The processor circuit **230** includes a microprocessor (or more generally a processor) **232**, program memory **234**, an I/O port **236**, table memory **238**, temporary memory **240**, and a clock **244**. The program memory **234**, I/O port **236**, table memory **238**, temporary memory **240**, and clock **244** are all in communication with the processor **232**. The processor circuit **230** may include a plurality of microprocessors, for example, and the aforementioned components of the processor circuit **230** may be combined, for example. The program memory **234** includes blocks of code for directing the processor **232** to carry out the functions of the routing controller (**30**), and the I/O port **236** includes an access server interface **242** for communicating with the access server **14**.

In the illustrated embodiment as described above, the access server (**14**) transmits (at block **196** illustrated in FIG. **7**) an access code request message (**110**) to the routing controller (**30**) in order to obtain from the routing controller (**30**) an access code. When an access code request message (**110**) is received at the access server interface **242**, the processor **232** preferably stores certain values from the access code request message in stores in the temporary memory **240** for ease of retrieval. In particular, the temporary memory **240** includes a callee identifier store **246** for storing the callee identifier from the callee identifier field **116** in the access code request message **110** illustrated in FIG. **4**, a caller identifier store **248** for storing the caller identifier that was stored in the caller identifier field **118** of the access code request message **110** illustrated in FIG. **4**, a caller username store **249** for storing the caller username that was stored in the caller username field **112** of the access code request message **110** illustrated in FIG. **4**, and an access code store **250** for storing an access code that is selected when the routing controller (**30**) receives an access code request message (**110**). The temporary memory **240** also includes a local calling area identifier store **245** for storing an identifier of a local calling area associated with the mobile telephone (**12**). The clock **244** generally maintains and stores a representation of a current date and time.

The I/O port **236** further includes a database request port **256** through which a request to the database (**23** in FIG. **1**) can be made, and also includes a database response port **258** for receiving a reply from the database (**23**). The I/O port **236** further includes a routing controller (RC) request message input **260** for receiving an RC request message (illustrated in FIG. **17**) from the call controller (**13** in FIG. **1**) and includes a routing message output **262** for sending a routing message back to the call controller **13**. The I/O port **236** thus acts to receive a caller identifier and a callee identifier contained in an RC request message from the call controller, the RC request message being received in response to initiation of a call by a subscriber of the system, as described below.

The program memory **234** includes blocks of codes for directing the processor **232** to carry out various functions of the routing controller (**30**). One of these blocks includes an RC request message handler **380** which directs the routing controller (**30**) to produce a routing message in response to a received RC request message, an example of which is illustrated in FIG. **17**. The RC request message handler process is shown in greater detail at **380** in FIGS. **18**A through **18**C. Another of these blocks in the program memory **234** includes an access code generator, which is described at **270** in FIG. **12**, and which directs the routing controller (**30**) to produce an access code as directed by the program codes in block **196** shown in FIG. **7**. Yet another of these blocks in the program memory **234** includes a local calling area identifier generator, which directs the routing controller (**30**) to produce a local calling area identifier using the location identifier from the location identifier field **119** of the access code request message **110** illustrated in FIG. **4**.

Local Calling Area Identifier Generator

Referring to FIG. **1**, it will be appreciated that preferably, a call made by the mobile telephone **12** using the access code obtained from the access server **14** will be a local call for the mobile telephone **12**, based on a geographical location of the mobile telephone. Therefore, blocks in the program memory **234** include a local calling area identifier generator, which directs the routing controller **30** to produce a local calling area identifier.

For example, the local calling area identifier generator may direct the microprocessor **152** to access a dialing profile associated with the caller. The dialing profile may be identified using the username in the username field **112** in the access code request message **110** illustrated in FIG. **4**, and to store in the local calling area identifier field **245** a default location of the caller retrieved from the dialing profile associated with the caller.

Referring to FIG. **9**, an exemplary dialing profile is illustrated generally at **200** and includes a username field **202**, a domain field **204**, and calling attributes comprising a national dialing digits (NDD) field **206**, an international dialing digits (IDD) field **208**, a country code field **210**, a local area codes field **212**, a caller minimum local number length field **214**, a caller maximum local number length field **216**, a reseller field **218**, a maximum number of concurrent calls field **220**, a current number of concurrent calls field **222**, and a default local calling area identifier field **224**. Therefore, in some embodiments, the local calling area identifier generator directs the microprocessor **152** to determine a local calling area associated with the mobile telephone (**12**) by retrieving the default local calling area identifier from the default local calling area identifier field **224** of the dialing profile **200**.

Effectively, the dialing profile **200** is a record identifying calling attributes of the caller identified by the username in the username field **202**. More generally, dialing profiles **200** represent calling attributes of respective users, and are discussed in more detail in PCT publication No. WO 2008/052340. As described in PCT publication No. WO 2008/052340, a dialing profile of the type shown in FIG. **9**, and

also other records such as direct-in-dial (DID) records, call blocking records, call forwarding records, and voicemail records, may be created whenever a user registers with the system or agrees to become a subscriber to the system.

Alternatively, the local calling area identifier generator may generate a local calling area identifier to be stored in the local calling area identifier store **245** using the location identifier from the location identifier field **119** of the access code request message **110** illustrated in FIG. **4**. As described above, the location identifier field (**119**) may store one or more of an IP address of the mobile telephone (**12**) in a wireless IP network, an identifier of a wireless voice signal station in wireless communication with the mobile telephone, and a user-configured identifier. One or more of these values may be used to identify a local calling area that is or is likely to be associated with the mobile telephone (**12**) in order to generate a local calling area identifier to be stored in the local calling area identifier store **245**.

For example, it has been found that services available from web sites such as http://www.ip2location.com/ and http://www.serviceobjects.com/products/dots_ipgeo.asp, for example, can produce a name of a location, and also latitude and longitude values, associated with an IP address. Using this information derived from an IP address, or other information from the location identifier field (**119**), a local calling area may be identified by hierarchical jurisdictional designations (such as country, province, and city in Canada or country, state, and city in the United States) and encoded as codes identifying the local calling area. These codes may then be stored in the local calling area identifier store **245**.

Access Code Association Table

In the illustrated embodiment, the table memory **238** (shown in FIG. **8**) includes an access code association table **170**, an example of which is illustrated in FIG. **10**, for associating access codes with callee identifiers, caller identifiers, caller usernames, timeouts, and timestamps. Although the routing controller (**30**) is illustrated in this embodiment as a separate component from the access server (**14**), it will be appreciated that in other embodiments, the routing controller (**30**) may be part of or integrated with the access server (**14**), and in these other embodiments, the access code association table **170** may be part of or integrated with the access server.

Referring to FIGS. **1** and **10**, the access code association table **170** generally includes a plurality of records, each having an access code field **173** storing an access code. The access codes in the access code association table **170** may thus form a pool of access codes, where each access code may identify a respective telephone number. In the illustrated embodiment, the access codes in the access code fields **173** of records of the access code association table **170** identify respective channels (illustrated by example only as **20**, **22**, and **24**) that are operably configured to cooperate with the IP network **26** via the gateway **18** to cause a call involving the mobile telephone **12** to be routed through the IP network.

Referring to FIG. **10**, the exemplary access code association table **170** includes records **172**, **174**, **176**, **178**, and **180**, each having respective fields for storing a local calling area identifier **171**, an access code **173**, a channel identifier **175**, a callee identifier **177**, a caller identifier **179**, a caller username **183**, a timeout **181**, and a timestamp **182**. Generally, a record in the access code association table **170** will be created for each access code that identifies a channel (such as the channels **20**, **22**, and **24** illustrated in FIG. **1**) that is configured or configurable to establish communication through a gateway (such as the gateway **18** illustrated in FIG. **1**) to an IP network (**26** in FIG. **1**) in response to a call received at the channel. When a record is created in respect of a channel, the local calling area identifier field **171** is preferably initialized with an identifier of a local calling area associated with the channel, the access code field **173** is preferably initialized with an access code associated with the channel, and the channel identifier field **175** is preferably initialized with an identifier of the channel. The remaining fields (for storing a callee identifier **177**, a caller identifier **179**, a caller username **183**, a timeout **181**, and a timestamp **182**) are preferably initialized with default "null" values when a record is created. The fields for storing a local calling area identifier **171**, an access code **173**, a channel identifier **175** preferably remain generally constant during ordinary operation of the access code association table **170**, although the values stored in the fields for storing a callee identifier **177**, a caller identifier **179**, a caller username **183**, a timeout **181**, and a timestamp **182** may vary as described below. It will be appreciated that in some embodiments, one or more of the fields for storing a local calling area identifier **171**, a channel identifier **175**, a caller identifier **179**, a caller username **183**, a timeout **181**, and a timestamp **182** may not be required and be omitted.

As noted above, the local calling area identifier field **171** is preferably initialized with an identifier of a local calling area associated with the channel. The local calling area identifier field **171** preferably stores codes that are encoded in the same manner as the codes in the local calling area identifier store **245**, as described above, so that an access code in the local calling area identified by the codes in the local calling area identifier store **245** may be identified by searching the access code association table **170** for an access code associated with a local calling area identifier in the associated local calling area identifier field **171** that matches the local calling area identifier in the local calling area identifier store **245**. It has been found that information available from web sites such as http://en.wikipedia.org/wiki/List_of_NANP_area_codes, and services available from web sites such as http://www.serviceobjects.com/demos/PhoneExchangeDemo.asp, for example, may be used to determine a local calling area identifier associated with a given access code where, for example, the access code is a PSTN telephone number.

In the exemplary access code association table **170**, the access codes in the access code fields **173** are telephone numbers for PSTN lines, three of which are in the 604 area code in Vancouver, British Columbia, Canada, and two of which are in the 416 area code in Toronto, Ontario, Canada. It will be appreciated that the access code association table **170** is an example only, and other access code association tables may include any number of access codes, which need not be PSTN telephone numbers, and which need not be limited to particular geographical areas.

In the exemplary access code association table **170**, the access code field **173** in the record **174** stores an access code 1-604-345-2323, which may be a local telephone number for Vancouver, British Columbia, Canada, and the callee identifier field **177** of the record **174** stores a callee identifier 1-403-789-1234, which may be a telephone number for a callee in Calgary, Alberta, Canada for example, thereby associating the callee identifier 1-403-789-1234 with the access code 1-604-345-2323. Furthermore, the caller identifier field **179** of the record **174** stores a caller identifier 1-416-444-1441 and the caller username field **183** stores a caller username 2001 1050 8667, thereby associating the caller identifier 1-416-444-1441 and caller username 2001 1050 8667 with the aforementioned access code and callee

identifier. The caller identifier 1-416-444-1441 may be associated with a mobile telephone normally geographically located in Toronto, Ontario, Canada, but which may be in Vancouver and is therefore using a Vancouver-based access code to place a call to a Calgary-based number, for example. In the example record **174**, the timestamp field **182** indicates that the callee identifier 1-403-789-1234, the caller identifier 1-416-444-1441, and the caller username 2001 1050 8667 were associated with the access code 1-604-345-2323 on Jun. 15, 2008 at 10:31 am, and the timeout field **181** indicates that this association is to expire 10 minutes after the time indicated in the timestamp field.

Likewise, the exemplary record **178** indicates that the callee identifier 1-604-321-1234, the caller identifier 1-416-444-1234, and the caller username 2001 1050 4141 were associated with the access code 1-416-234-4646 on Jun. 15, 2008 at 2:21 pm, and the timeout field **181** of the record **178** indicates that this association is to expire within 10 minutes of the time in the timestamp field **182**.

It will also be appreciated that the access code association table **170** may, in other embodiments, be substituted with other data structures or storage media. For example, in alternative embodiments, as described below, a DID record of the type shown at **370** in FIG. **11** may associate an access code with a callee identifier and with other information such as a caller identifier, a timeout value, and a timestamp value, additionally or alternatively to the access code association table **170**.

DID Bank Table Records

As described in PCT Publication No. 2008/052340, a DID bank table record may be created and stored in a DID bank table in the database (**23** in FIG. **1**) when a user registers with the system, to associate the username of the user and a host name of the node with which the user is associated, with a number on the PSTN network formatted in compliance with the E.164 standard set by the International Telecommunication Union (ITU). However, as explained below, DID records may, in some embodiments, also associate usernames and host names with respective access codes, and may also associate access codes with respective callee identifiers and with other information such as caller identifiers, timeout values, and timestamp values.

Referring to FIG. **11**, an exemplary DID bank table record is shown generally at **370**, and includes a username field **371**, a user domain field **372**, and a DID field **373**. The username field **371** may store a username of a user of the system, in which case the user domain field **372** stores a host name of the node with which the user is associated, and the DID field **373** stores an E.164 number on the PSTN network associated with the user. Exemplary host names stored in the user domain field **372** include sp.yvr.digifonica.com for Vancouver, British Columbia, Canada and sp.lhr.digifonica-.com for London England, for example, as described in PCT Publication No. 2008/052340. If the user has multiple telephone numbers, then multiple records of the type shown at **370** would be included in the DID bank table, each having the same username and user domain, but different DID field **373** contents reflecting the different telephone numbers associated with that user.

However, DID fields **373** of DID bank table records **370** may also store access codes, in which case the username field **371** may store a username associated with the access code. In these DID bank table records **370**, the user domain field **372** stores a host name of the node with which the access code is associated. Therefore, DID bank table records **370** may, in some embodiments, associate usernames and host names with respective access codes.

The exemplary DID bank table record **370** further includes a callee identifier field **374**, a caller identifier field **375**, a timeout field **376**, a timestamp field **377**, a local calling area identifier field **378**, a channel identifier field **379**, and a caller username field **381**, which may be used in an analogous manner to the callee identifier field **177**, the caller identifier field **179**, the timeout field **181**, the timestamp field **182**, the local calling area identifier field **171**, the channel identifier field **175**, and the caller username field **183** respectively of the access code association table **170** illustrated in FIG. **10**. The DID bank table records **370** may thus associate access codes with respective local calling area identifiers, callee identifiers, caller identifiers, caller usernames, timeouts, and timestamps, although the caller identifier field **375**, timeout field **376**, timestamp field **377**, local calling area identifier field **378**, channel identifier field **379**, and caller username field **381** may not be necessary, and one or more of these fields may be omitted in some embodiments.

Furthermore, it will be appreciated that the callee identifier field **374**, caller identifier field **375**, timeout field **376**, and timestamp field **377** of the DID bank table record **370** may be omitted for DID table records that are not in respect of access codes, but rather are in respect of telephone numbers of users of the system, for example, as described in PCT Publication No. 2008/052340. The callee identifier field **374**, caller identifier field **375**, timeout field **376**, and timestamp field **377** of the DID bank table record **370** may also be omitted in embodiments where the access code association table **170** includes records with these types of fields.

For simplicity, the following description is directed to embodiments wherein an access code association table **170** associates access codes with respective callee identifiers, caller identifiers, timeout values, and timestamp values. However, it will be appreciated that the processes described herein for records in the access code association table **170** may additionally or alternatively be applied to DID bank table records **370** in an analogous manner.

Access Code Generator

Referring back to FIGS. **1**, **4**, and **8** in the illustrated embodiment as described above, the access server **14** transmits (at block **196** illustrated in FIG. **7**) an access code request message **110** to the routing controller **30** in order to obtain from the routing controller **30** an access code. When an access code request message **110** is received at the access server interface **242**, the processor **232** preferably authenticates the user by making various enquiries of databases to which it has access, to determine whether or not the password in the password field **114** of the access code request message **110** matches a password stored in the database in association with the username in the username field **112**. Various functions may be used to pass encryption keys or hash codes back and forth to ensure that the transmittal of passwords is secure. If the user is successfully authenticated, the processor **232** then preferably produces an access code.

Referring to FIGS. **8** and **12**, a process for producing an access code is shown generally at **270**. Essentially the process **270** determines whether the access code in a given record (referred to below as the "currently addressed record") in the access code association table shown at **170** in FIG. **10** is within the local calling area identified by the local calling area identifier store **245**, and whether the access code is currently available for association with a callee identifier. In order to produce an access code in response to receiving an access code request message (**110**) from the access server (**14**), the processor **232** of the routing controller (**30**) pref-

erably searches the pool of access codes in the access code association table (**170**) to identify an access code identifying a channel usable by the mobile telephone (**12**) to initiate a call to the callee, using the process **270** until an available access code in the local calling area identified by the local calling area identifier store **245** is identified. The access code generator thus preferably selects an access code from the pool of access codes in the access code association table (**170**), and preferably selects an access code in a local calling area associated with the mobile telephone (**12**).

Starting with the first record in the access code association table, the process **270** begins at block **272**, which directs the processor **232** of the routing controller (**30**) to determine whether the access code in the currently addressed record of the access code association table **170** is associated with the same local calling area as the mobile telephone (**12**) as identified by the contents of the local calling area identifier store **245**. If at block **272** the access code of the currently addressed record is not associated with the same local calling area as the mobile telephone (**12**), the process **270** ends, the next record in the access code association table **170** is addressed, and the process is repeated for the next record in the access code association table.

However, if at block **272** the access code of the currently addressed record is associated with the same local calling area as the mobile telephone (**12**), or if the access code request message **110** (illustrated in FIG. **4**) did not include a local calling area identifier, then the process **270** continues at block **274**, which directs the processor **232** to determine whether the access code of the currently addressed record is associated with a callee identifier. To do this, the processor **232** determines whether the callee identifier field (**177**) of the currently addressed record stores a "null" value that was assigned to it on initialization, or whether the callee identifier field instead stores a callee identifier. In other words the processor checks to see whether the currently addressed record has already been in use.

If at block **274** the callee identifier field (**177**) of the currently addressed record in the access code association table (**170**) does store a callee identifier and not the "null" value that was assigned to the callee identifier field on initialization (for example, records **174** and **178** in FIG. **10**), then the access code of that record is associated with a callee identifier, and the process **270** continues at block **278**, which directs the processor **232** to determine whether the association of the callee identifier with the access code has expired. In the illustrated embodiment, the codes at block **278** direct the processor **232** to determine whether the sum of the contents of the timestamp field (**182**) and of the timeout field (**181**) in the currently addressed record of the access code association table **170** (shown in FIG. **10**) is less than the current time represented by the clock **244**. If at block **278** the sum of the timeout and timestamp fields in the currently addressed record of the access code association table **170** is less than the time represented by the clock **244**, then the association of the callee identifier with the access code is not expired and the process **270** ends, the next record in the access code association table (**170**) is addressed, and the process **270** is repeated for the next record in the access code association table.

However, if at block **278** the sum of the contents of the timeout and timestamp fields (**181** and **182**) in the currently addressed record of the access code association table (**170**) is not less than the time represented by the clock **244**, then the association of the callee identifier with the access code has expired, and the process **270** continues at block **276** which directs the processor **232** to store the contents of the access code field **173** of the currently addressed record in the access code store **250** of the temporary memory **240** of the routing controller **30**.

Referring to FIGS. **8**, **10**, and **12**, if at block **274** the callee identifier field in the currently addressed record does not store a callee identifier but stores instead the "null" value that was assigned to the callee identifier field on initialization (for example, records **172**, **176**, and **180**), then the access code of that record is not associated with a callee identifier, and the process **270** continues at block **276**, which directs the processor **232** to store the access code from the access code field **173** of the currently addressed record, in the access code store **250** in the temporary memory **240**.

After the selected access code is stored in the access code store **250** at block **276**, the process **270** continues at block **280**, which directs the processor **232** to store the callee identifier from the callee identifier store **246** in the callee identifier field **177** of the currently addressed record, thereby creating an association of the callee identifier with the selected access code.

The process **270** then continues at block **282**, which directs the processor **232** to store the caller identifier from the caller identifier store **248** (which identifies the mobile telephone **12** shown in FIG. **1**) in the caller identifier field **179** of the currently addressed record of the access code association table **170**, thereby also storing the caller identifier in association with the selected access code.

The process **270** then continues at block **283**, which directs the processor **232** to store the caller username from the caller username store **249** in the caller username field **183** of the currently addressed record of the access code association table **170**, thereby also storing the caller username in association with the selected access code.

The process **270** then continues at block **284**, which directs the processor **232** to store timeout and timestamp values in the timeout and timestamp fields **181** and **182** of the currently addressed record of the access code association table **170**, thus further storing, in association with the selected access code, a timestamp for use in determining when the usability of the access code to initiate a call to the callee will expire. A default value, such as 10 minutes, for example may be stored in the timeout field **181** of the currently addressed record. Also, the current time indicated by the clock **244** is preferably stored in the timestamp field **182** of the currently addressed record.

In alternative embodiments, the access code association table (**170**) might not include fields for a caller identifier, caller username, a timeout, or a timestamp. In these embodiments, one or more of blocks **282**, **283**, and **284** described above are not necessary, and one or more of the caller identifier store **248** and the caller username store **249** may be omitted.

In summary, the access code generator in the illustrated embodiment responds to receiving an access code request message **110** illustrated in FIG. **4** from the access server (**14**) by first authenticating the user, and then by searching through a pool of access codes, using the process **270** shown in FIG. **12**, to identify an access code that is associated with the local calling area identified by the local calling area identifier store (**245**) and that is not previously and validly associated with another callee identifier. It will be appreciated that in alternative embodiments, different data structures and algorithms may be preferable for identifying an access code that meets the aforementioned criteria. For example, in accordance with conventional database design that is well-known in the art, the records illustrated in the access code association table **170** illustrated in FIG. **10** may

alternatively be organized in a binary tree according to the value in the local calling area identifier field **171**, or in separate tables for respective local calling area identifiers, for example, in order to enable a more efficient search of the access code association table for an access code that satisfies the aforementioned criteria. Therefore, the access code association table (**170**) and the process **270** illustrated in FIG. **12** are examples only, and one of ordinary skill in the art will readily appreciate numerous alternative data structures and algorithms.

Gateway

Referring to FIG. **13**, in this embodiment, the gateway (**18**) includes a processor circuit shown generally at **300**, which includes a microprocessor **302**. The processor circuit **300** also includes a program memory **304**, a memory **305**, and an I/O port **306**, all of which are in communication with the microprocessor **302**. The processor circuit **300** may include multiple processors etc., and the aforementioned components of the processor circuit **300** may alternatively be combined.

The I/O port **306** includes a channel interface **308**, which, in the illustrated embodiment, is in communication with the channels **20**, **22**, and **24** that were also illustrated in FIG. **1**. Where, as in the illustrated embodiment, the channels **20**, **22**, and **24** are PSTN telephone lines in the PSTN network **29**, the channel interface **308** may, for example, be a T1 port for communication with one or more T1 lines (illustrated at **27** in FIG. **1**) of a PSTN service provider, in a manner well-known in the art. The I/O port in the illustrated embodiment also includes an internet interface **309** for interfacing with the Internet Protocol (IP) network **26** illustrated in FIG. **1**. The program memory **304** stores blocks of codes for directing the microprocessor **302** to carry out the functions of the gateway (**18**). It has been found that the AS5350 Universal Gateway available from Cisco Systems, Inc. of San Jose, Calif. may, for example, be suitable as the gateway (**18**).

Referring back to FIG. **1**, and also still to FIG. **13**, when a call is received on one of the channels **20**, **22**, or **24**, the microprocessor **302** causes the I/O port **306** to use the internet interface **309** to send a Session Initiation Protocol (SIP) Invite message to a pre-determined node with which the gateway **18** is associated, which in the illustrated embodiment is the first node **11**. Generally, the gateway **18** will be associated with a node that is geographically closest to the gateway, in order to minimize transmission times over the IP network **26**. In response to the SIP Invite message, the call controller **13** sends an RC request message to the routing controller **30** which makes various enquiries of the database **23** to produce a routing message that is sent back to the call controller **13**. The call controller **13** then communicates with the media relay **28** to cause a communications link including an audio path (and a videopath if a videophone call) to be established through the media relay to the same node, a different node, or to a communications supplier gateway as shown generally at **34** to carry audio, and where applicable, video traffic to the call recipient or callee.

Referring to FIG. **14**, an exemplary SIP Invite message is shown generally at **310** and includes a caller identifier field **312**, a callee identifier field **314**, a digest parameter field **315**, a call identifier field **316**, an IP address field **317**, and a gateway UDP port field **318**. Examples of values for the fields in the SIP Invite message **310** are shown for illustration purposes only in FIG. **14**. The caller identifier in the caller identifier field **312** is preferably in the form of the telephone number of the caller followed by the "@" symbol, which in turn is followed by the IP address of the gateway (**18**) in the IP network (**26**). The caller identifier may be determined by retrieving calling line identification (CLID) information from the signal provided by the PSTN network (**29**) to the gateway (**18**) for example. Where the caller identification information is not available to the gateway (**18**), the caller identifier in the caller identifier field **312** preferably includes a pre-assigned number (such as 11111, for example) indicating that the caller identification information was not available, followed by the "@" symbol and then by the IP address of the gateway (**18**).

The callee identifier in the callee identifier field **314** is the access code identifying the channel (**20**, **22**, or **24** in the example of FIG. **1**) on which the call was placed, and which was received from the access server (**14**). In the illustrated example, the access code is the PSTN telephone number 1-604-345-1212 corresponding to the channel **20** illustrated in FIG. **1**, and to the access code stored in the access code field **173** of the record **172** in the exemplary access code association table **170** illustrated in FIG. **10**.

The digest parameter in the digest parameter field **315** is generated by the gateway (**18**) and may uniquely identify the SIP session that is initiated with the SIP Invite message **310**.

The call identifier in the call identifier field **316** is, in the illustrated embodiment, a four-digit hexadecimal number generated by the gateway (**18**) to identify the call, followed by the "@" symbol, which in turn is followed by the IP address of the gateway.

The IP address in the IP address field **317** is the IP address of the gateway (**18**) in the IP network (**26**), and the gateway UDP port number in the gateway UDP port field **318** includes a UDP port identifier identifying a UDP port at which the audio/video path will be terminated at the gateway (**18**).

It should be noted that throughout the description of the embodiments of this invention, the IP/UDP addresses of all elements such as the gateway (**18**) will be assumed to be valid IP/UDP addresses directly accessible via the Internet or a private IP network, for example, depending on the specific implementation of the system. As such, it will be assumed, for example, that the gateway (**18**) will have an IP/UDP address directly accessible by the call controllers and the media relays on their respective nodes, and those addresses will not be obscured by Network Address Translation (NAT) or similar mechanisms. In other words, the IP/UDP information contained in SIP messages (for example the SIP Invite message or the RC Request message which will be described below) will match the IP/UDP addresses of the IP packets carrying these SIP messages.

It will be appreciated that in many situations, the IP addresses assigned to various elements of the system may be in a private IP address space, and thus not directly accessible from other elements. Furthermore, it will also be appreciated that NAT is commonly used to share a "public" IP address between multiple devices, for example between home PCs and IP telephones sharing a single Internet connection. For example, the gateway (**18**) may be assigned an IP address such as 192.168.0.5. This address is located in so called "non-routable" (IP) address space and cannot be accessed directly from the Internet. In order for this device to communicate with other computers located on the Internet, the IP address has to be converted into a "public" IP address, for example 24.14.102.5 assigned by the Internet Service Provider, by a device performing NAT, typically a router. In addition to translating the IP address, NAT typically also translates UDP port numbers, for example an audio path originating at the gateway (**18**) and using a UDP port 12378 at its private IP address, may have be translated to a UDP

port 23465 associated with the public IP address of the NAT device. In other words, when a packet originating from the gateway (**18**) arrives at an Internet-based node, the source IP/UDP address contained in the IP packet header will be 24.14.102.5:23465, whereas the source IP/UDP address information contained in the SIP message inside this IP packet will be 192.168.0.5:12378. The mismatch in the IP/UDP addresses may cause a problem for SIP-based VoIP systems because, for example, a node will attempt to send messages to a private address but the messages will never get there.

Call Controller

Referring to FIG. **15**, the call controller (**13**) includes a processor circuit shown generally at **320**. The processor circuit **320** includes a microprocessor **322**, program memory **324**, and an I/O port **326**. The program memory **324** and the I/O port **326** are in communication with the microprocessor **322**. The processor circuit **320** may include a plurality of microprocessors, a plurality of program memories, and a plurality of I/O ports to be able to handle a large volume of calls. However, for simplicity, the processor circuit **320** will be described as having only one microprocessor **322**, program memory **324**, and I/O port **326**, it being understood that there may be more.

Generally, the I/O port **326** includes an input **328** for receiving messages such as the SIP Invite message from the gateway (**18**) or from a VoIP telephone (**36** in FIG. **1**, for example). The I/O port **326** also has an RC request message output **330** for transmitting an RC request message to the routing controller **30** of FIG. **1**, an RC message input **332** for receiving routing messages from the routing controller **30**, a gateway output **334** for transmitting messages to the gateway **18** and/or **34** shown in FIG. **1** to advise the gateway **18** and/or **34** to establish an audio path, for example, and a gateway input **336** for receiving messages from the gateway **18** and/or **34**. The I/O port **326** further includes a SIP output **338** for transmitting messages to the gateway (**18** and/or **34**) or VoIP telephone (**36**, for example) to advise the gateway **18** and/or **34** or IP telephone of the IP addresses of the gateways which will establish the audio/video path. The I/O port **326** further includes a voicemail server input and output **340** and **342** respectively for communicating with the voicemail server **19** shown in FIG. **1**.

While certain inputs and outputs have been shown as separate, it will be appreciated that some may be a single IP address and IP port. For example, the messages sent to the routing controller (**30**) and received from the routing controller (**30**) may be transmitted and received on the same single IP port.

The program memory **324** includes blocks of code for directing the microprocessor **322** to carry out various functions of the call controller (**13**). For example, these blocks of code include a first block **344** for causing the processor circuit **320** to execute a SIP Invite to RC Request process to produce an RC Request Message in response to a received SIP Invite message. In addition, there is a Routing Message to Gateway message block **346** which causes the processor circuit **320** of the call controller to produce a gateway query message in response to a received routing message from the routing controller (**30**).

Referring to FIGS. **15** and **16**, the SIP Invite to RC Request process is shown in more detail at **344**. On receipt of a SIP Invite message of the type shown in FIG. **14**, block **350** directs the processor circuit **320** to produce an RC Request Message. Block **352** then directs the processor circuit **320** to cause the RC Request Message to be sent to the routing controller **30** illustrated in FIG. **1**.

Referring to FIG. **17**, an exemplary RC request message is shown generally at **360** and includes a caller identifier field **362**, a callee identifier field **364**, a digest parameters field **366**, and a call identifier field **368**. These fields may be populated with the contents of the caller identifier field **312**, callee identifier field **314**, digest parameter field **315**, and call identifier field **316** respectively of the SIP Invite message **310** illustrated in FIG. **14**. In other embodiments, the RC request message may further include a type field (not shown) containing a type code to indicate whether the call is from a third party or from a system subscriber. Other variations of an RC request message are explained in PCT Publication No. WO 2008/052340. A type field (not shown) in the RC request message **360** may be advantageous in embodiments where SIP Invite messages may also be received from an IP telephone that is using VoIP software to make a voice call. However, in the embodiments that are illustrated herein, SIP Invite messages originate from the gateway (**18**), and therefore a type designation is not necessary and may be omitted from the RC request message **360**. In embodiments where a SIP Invite message may be received from an IP telephone, the SIP invite to RC request process shown in FIG. **16** may require additional steps, as illustrated in FIG. 5 of PCT Publication No. WO 2008/052340.

RC Request Message Handler

As illustrated in FIG. **8**, the program memory **234** includes an RC request message handler **380** which directs the routing controller (**30**) to produce a routing message in response to a received RC request message (**360**). Referring to FIG. **18**A, the RC request message handler **380** begins with a first block **382** that directs the RC processor circuit (**230**) to separately store the contents of the callee identifier field **364** and caller identifier field **362** of the RC request message (**360**) in the callee identifier store **246** and the caller identifier store **248** respectively of FIG. **8**.

Block **384** then directs the RC processor circuit (**230**) to use the contents of the caller username store **249** to locate and retrieve from the database (**23**) a dialing profile **200** associated with the caller, as described above and illustrated in FIG. **9**, for example. The retrieved dialing profile may then be stored in the temporary memory **240**, for example.

The RC request message handler **380** continues at block **386**, which directs the processor circuit (**230**) of the routing controller to determine whether the contents of the current number of concurrent calls field **222** of the dialing profile **200** shown in FIG. **9** are less than the contents of the maximum number of concurrent calls field **220** of the dialing profile for the caller and, if so, block **388** directs the processor circuit to increment the contents of the current number of concurrent calls field **222** and the processor circuit (**230**) is directed to point A in FIG. **18**B. If the contents of the current number of concurrent calls field **222** are equal to or greater than the contents of the maximum number of concurrent calls field **220**, then block **390** directs the processor circuit (**230**) to send an error message back to the call controller (**13**) to cause the call controller to notify the caller that the maximum number of concurrent calls has been reached and no further calls can exist concurrently, including the presently requested call.

Assuming that block **386** allows the call to proceed, the RC processor circuit (**230**) is directed to perform certain checks on the callee identifier in the callee identifier field **246** in FIG. **8**. These checks are shown in greater detail in FIG. **18**B.

Referring to FIG. **18**B, the RC processor circuit (**230**) is directed to a first block **392** that causes it to determine

whether a digit pattern of the callee identifier includes a pattern that matches the contents of the international dialing digits (IDD) field **208** in the dialing profile **200** (shown in FIG. **9**) associated with the caller. If so, then block **394** directs the RC processor circuit (**230**) to set a call type code identifier variable maintained by the processor to indicate that the call is an international call, and block **396** directs the processor to produce a reformatted callee identifier by reformatting the callee identifier into a predefined digit format. In this embodiment, this is done by removing the pattern of digits matching the IDD field contents (**208**) of the caller dialing profile **200** to effectively shorten the callee identifier. Then, block **398** directs the RC processor circuit (**230**) to determine whether or not the callee identifier has a length which meets criteria establishing it as a number compliant with the E.164 Standard set by the ITU. If the length does not meet these criteria, then block **400** directs RC processor circuit (**230**) to send back to the call controller (**13**) a message indicating the length is not correct. The process **380** is then ended. At the call controller **13**, routines (not shown) stored in the program memory **324** may direct the processor circuit (**320** of FIG. **15**) to respond to the incorrect length message by transmitting a message back to the mobile telephone (**12** shown in FIG. **1**) to indicate that an invalid number has been dialed.

If the length of the amended callee identifier meets the criteria set forth at block **398**, then block **402** directs the RC processor circuit (**230**) to make a database request to the database (**23**) to determine whether or not the amended callee identifier is found in the DID field (**373**) of a record such as shown in FIG. **11** in the DID bank table. If at block **402** the RC processor circuit (**230**) receives a response from the database (**23**) indicating that the reformatted callee identifier produced at block **396** is found in the DID field (**373**) of a record in the DID bank table, then the callee is a subscriber to the system and the call is classified as a private network call by directing the processor to block **404**, which directs the RC processor circuit (**230**) to copy the contents of the corresponding username field (**371** in FIG. **11**) from the callee DID bank table record (**370** in FIG. **11**) into the callee identifier store (**246** in FIG. **8**). Thus, the RC processor circuit (**230**) locates a subscriber username associated with the reformatted callee identifier. The processor (**232**) is then directed to point B in FIG. **18**A.

Calls to Subscribers in Different Nodes

Referring back to FIG. **1**, as noted above, the gateway **18** is preferably associated with a pre-determined node, which in the illustrated embodiment is the first node **11**. Referring back to FIG. **18**A, block **406** directs the processor (**232** of FIG. **8**) to execute a process to determine whether or not the node associated with the reformatted callee identifier in the callee identifier store (**246** in FIG. **8**, which, at block **404**, was set to be a username of the callee) is the same node that is associated with the gateway **18** illustrated in FIG. **1**.

To do this, the processor (**232**) may, for example, identify a node associated with the gateway (**18**) by using an IP address associated with the gateway to determine a node identifier of the gateway. An IP address associated with the gateway (**18**) may, for example, be obtained from either the caller identifier field **362** or the call identifier field **368** of the RC request message **360** illustrated in FIG. **17**, as each of these fields includes a portion following an "@" symbol that indicates an IP address of the gateway. In order to determine a node identifier associated with the gateway (**18**) using the IP address associated with gateway (**18**), the processor **232** (illustrated in FIG. **8**) may access a gateway node association table stored in the database **23** (illustrated in FIG. **1**).

Referring to FIG. **19**, an exemplary gateway node association table is shown generally at **480**. The exemplary gateway node association table **480** includes first and second records **482** and **484**, each having a respective gateway IP address field **486** and a respective node identifier field **488**. It will be appreciated that the exemplary gateway node association table **480** is an example for illustration purposes only. The values in the gateway IP address fields **486** are preferably initialized when a gateway (such as the gateway **18** illustrated in FIG. **1**) is installed as part of the system (**10**), and are preferably updated as the IP addresses of the respective gateways may change from time to time. The values in the node identifier fields **488** are also preferably initialized when a gateway (such as the gateway **18** illustrated in FIG. **1**) is installed as part of the system (**10**).

As indicated above, the reformatted callee identifier in the callee identifier store (**246** in FIG. **8**) was set at block **404** in FIG. **18**B to be a username of the callee from the username field **371** (illustrated in FIG. **11**), and in this embodiment, a prefix of the username of the callee preferably indicates a node associated with the callee. In the illustrated embodiment, the left-most digit in the username of the callee is a continent code, which is a sufficient prefix to identify a node associated with the callee. However, it will be appreciated that in other embodiments, other prefixes or other information may identify the associated node. Preferably, the values in the node identifier fields **488** correspond to the prefixes of the usernames in the username fields **371** (illustrated in FIG. **11**), so that the node associated with the callee is the same node that is associated with the gateway **18** illustrated in FIG. **1** if the prefix of the username of the callee matches the node identifier associated with the gateway (**18**). Therefore, in the illustrated embodiment, if the reformatted callee identifier in the callee identifier store (**246** in FIG. **8**) is 2001 1050 8667, for example, then in the example of FIG. **19**, the node associated with the callee is the same node as the node identified by the continent code "2" that is associated with the gateway associated with the IP address 20.14.102.5 in the record **482**, but is not the same node as the node identified by the continent code "5" that is associated with the gateway associated with the IP address 104.12.131.12 in the record **484**.

Referring back to FIG. **18**A, if at block **406** the prefix of the username of the callee does not match the node identifier associated with the gateway (**18**), then the call is a "cross-domain" call, and block **408** in FIG. **18**A directs the processor (**232** in FIG. **8**) to set a call type flag in the temporary memory (**240** in FIG. **8**) to indicate the call is a cross-domain call. Then, block **410** of FIG. **18**A directs the processor (**232** of FIG. **8**) to produce a routing message identifying an address on the private network with which the callee identified by the contents of the callee ID buffer is associated and to set a time to live for the call at a maximum value of 99999, for example. Routing messages and time to live values, and also a method of determining the node in the system with which the callee is associated, are further described in PCT Publication No. WO 2008/052340. Once a routing message is produced at block **410**, block **412** directs the processor (**232** in FIG. **8**) to cause the routing message to be sent to the call controller **13** shown in FIG. **1**, and the process ends.

Referring back to FIG. **18**B, if at block **392**, the callee identifier stored in the callee identifier store (**246** in FIG. **8**) does not begin with an international dialing digit, then block **414** directs the processor (**232**) to determine whether or not the callee identifier begins with the same national dial digit code as assigned to the caller. To do this, the processor (**232**) is directed to refer to the retrieved caller dialing profile as

shown in FIG. **9**. In FIG. **9**, the national dialing digit code **206** is the number 1. Thus, if the callee identifier begins with the number 1, then the processor (**232**) is directed to block **416** in FIG. **18**B.

Block **416** directs the processor (**232** of FIG. **8**) to examine the callee identifier to determine whether or not the digits following the NDD digit identify an area code that is the same as any of the area codes identified in the local area codes field **212** of the caller dialing profile **200** shown in FIG. **9**. If not, block **418** of FIG. **18**B directs the processor (**232**) to set the call type flag to indicate that the call is a national call. If the digits following the NDD digit identify an area code that is the same as a local area code associated with the caller as indicated by the caller dialing profile, block **420** directs the processor (**232**) to set the call type flag to indicate a local call, national style. After executing block **418** or **420**, block **422** directs the processor (**232**) to format the callee identifier into a pre-defined digit format to produce a re-formatted callee identifier by removing the national dialed digit and prepending a caller country code identified by the country code field **210** of the caller dialing profile shown in FIG. **9**. The processor (**232**) is then directed to block **398** of FIG. **18**B to perform other processing as already described above.

If at block **414**, the callee identifier does not begin with a national dialed digit, block **424** directs the processor (**232**) to determine whether the callee identifier begins with digits that identify the same area code as the caller. Again, the reference for this is the retrieved caller dialing profile shown in FIG. **9**. The processor (**232**) determines whether or not the first few digits of the callee identifier identify an area code corresponding to the contents of any area code identifier stored in the local area code field **212** of the retrieved caller dialing profile **200** (illustrated in FIG. **9**). If so, then block **426** directs the processor (**232**) to set the call type flag to indicate that the call is a local call. It should be noted that the call will not necessarily be a local call in every case where the first few digits of the callee identifier identify an area code corresponding to the contents of an area code identifier stored in the local area code field **212** (illustrated in FIG. **9**), and other determinations of when a call is to be considered local may be appropriate. However, it has been found that the determination described above for block **424** is satisfactory for some purposes. Next, block **428** directs the processor (**232**) to format the callee identifier into a pre-defined digit format to produce a reformatted callee identifier by prepending the caller country code to the callee identifier, the caller country code being determined from the country code field **210** of the retrieved caller dialing profile **200** shown in FIG. **9**. The processor (**232**) is then directed to block **398** for further processing as described above.

If at block **424**, the callee identifier does not start with the same area code as the caller, block **430** directs the processor (**232** of FIG. **8**) to determine whether the number of digits in the callee identifier, i.e. the length of the callee identifier, is within the range of digits indicated by the caller minimum local number length field **214** and the caller maximum local number length field **216** of the retrieved caller dialing profile **200** shown in FIG. **9**, and whether there is more than one area code identifier stored in the local area code field **212** of the retrieved caller dialing profile. If the number of digits in the callee identifier is within the aforementioned range and there is only one area code identifier stored in the local area code field (**212**), then block **432** directs the processor (**232**) to set the call type flag to indicate a local call and block **434** directs the processor (**232**) to format the callee identifier into a pre-defined digit format to produce a reformatted callee identifier by prepending to the callee identifier the caller country code (as indicated by the country code field **210** of the retrieved caller dialing profile **200** shown in FIG. **9**) followed by the caller area code as indicated by the local area code stored in the local area code field **212** of the caller dialing profile **200** shown in FIG. **9**. The processor (**232**) is then directed to block **398** of FIG. **18**B for further processing as described above.

If at block **430**, the callee identifier has a length that does not fall within the range specified by the caller minimum local number length field (**214** in FIG. **9**) and the caller maximum local number length field (**216** in FIG. **9**), or if there is more than one area code identifier stored in the local area code field **212** of the retrieved caller dialing profile **200** illustrated in FIG. **9**, then block **436** directs the processor (**232**) to send an error message back to the call controller (**13**), and the process ends.

In alternative embodiments, such as those illustrated in PCT Publication No. WO 2008/052340, an additional block (**402** in FIG. **8**B of PCT Publication No. WO 2008/052340) may determine whether the callee identifier is a valid username. However, in the embodiment disclosed herein, the callee identifier is assumed to be a telephone number of the callee, and not a username.

From FIG. **18**B, it will be appreciated that there are certain groups of blocks of codes that direct the processor **232** in FIG. **8** to determine whether the callee identifier has certain features such as an international dialing digit, a national dialing digit, an area code and a length that meet certain criteria, and cause the processor **232** to reformat the callee identifier stored in the callee identifier store **246** in FIG. **8**, as necessary into a predetermined target format including only a country code, area code, and a normal telephone number, for example, to cause the callee identifier to be compatible with the E.164 number plan standard in this embodiment. This enables block **402** in FIG. **18**B to have a consistent format of callee identifiers for use in searching through the DID bank table records **370** of the type shown in FIG. **11** to determine how to route calls to subscribers on the same system. Effectively, therefore blocks **392**, **414**, **424**, and **430** establish call classification criteria for classifying the call as a public network call or a private network call. Block **402** classifies the call, depending on whether or not the formatted callee identifier has a DID bank table record, and this depends on how the call classification criteria are met.

Calls to Non-Subscribers

Not all calls will be to subscribers, and this will be detected by the processor **232** of FIG. **8** when it executes block **402** in FIG. **18**B, and does not find a DID bank table record (**370** illustrated in FIG. **11**) that is associated with the callee, in the DID bank table. When this occurs, the call is classified as a public network call, by directing the processor (**232**) to point C in FIG. **18**C.

Referring to FIG. **18**C, block **438** directs the processor (**232**) to determine whether the formatted callee identifier in the callee identifier store **246** in FIG. **8** corresponds to an access code in the access code field **173** of a record in the access code association table **170** illustrated in FIG. **10** that is associated with a callee identifier. Because the callee identifier in the callee identifier store **246** in FIG. **8** has been formatted as described above with reference to FIG. **18**B, block **438** may involve determining whether an access code in the access code field **173** of a record of the access code association table **170** (illustrated in FIG. **10**) matches the formatted callee identifier in the callee identifier store **246** in FIG. **8**, and also whether a callee identifier (as opposed to the

"null" value assigned on initialization) is stored in the callee identifier field **177** in association with the access code. As noted above, for simplicity, this description is directed to embodiments wherein an access code association table **170** associates access codes with respective callee identifiers, caller identifiers, timeout values, and timestamp values, although it will be appreciated that the processes described herein for records in the access code association table **170** may additionally or alternatively be applied to DID bank table records **370** in an analogous manner.

If at block **438** the formatted callee identifier in the callee identifier store **246** in FIG. **8** is the same as an access code in the access code field (**173**) of a record of the access code association table **170** illustrated in FIG. **10** that is associated with a callee identifier, then block **440** directs the processor (**232**) to determine whether the caller identifier in the caller identifier store **248** (illustrated in FIG. **8**) is the same as the caller identifier in the caller identifier field (**179**) of the record of the access code association table (**170**), and thus whether the caller identifier in the caller identifier field (**179**) of the record of the access code association table (**170**) identifies the mobile telephone identified by the caller identifier in the caller identifier store **248**. If not, then block **442** directs the processor (**232**) to send an error message to the call controller (**13**), and the process ends.

But if at block **440** the caller identifier in the caller identifier store **248** (illustrated in FIG. **8**) corresponds to the caller identifier in the caller identifier field (**179**) of the record of the access code association table (**170**), then the routing controller (**30**) will produce a routing message that will cause the call controller to establish communication through the IP network (**26**) to the callee in response to a call received at a channel (**20**, **22**, or **24**). Preferably, block **444** includes codes that direct the processor (**232**) to determine whether the association of the access code with the callee identifier has expired, and thus whether the usability of the access code to initiate a call to the callee has expired, in the manner described above for block **278** in FIG. **12**. If at block **444** the association of the access code with the callee identifier has expired, then block **442** directs the processor (**232**) to send an error message to the call controller (**13**), and the process ends. Thus the routing controller produces a routing message that causes the call controller to establish the call only when the association of the access code with the callee identifier has not expired.

It will be appreciated that in alternative embodiments, one or more of the caller identifier, timeout, and timestamp fields **179**, **181**, and **182** may be omitted from the access code association table **170** illustrated in FIG. **10**, and in these embodiments, one or more of the blocks **440**, **442**, and **444** may also be omitted.

If at block **444** the association of the access code with the callee identifier has not expired, or if one or both of blocks **440** and **444** is omitted, then block **446** directs the processor (**232**) to store the callee identifier from the callee identifier field **177** of the record of the access code association table (**170**) in the callee identifier store **246** illustrated in FIG. **8**. The processor (**232**) is then directed to point A in FIG. **18**B to repeat the steps illustrated in FIG. **18**B using the callee identifier retrieved from the callee identifier field (**177**) in the record of the access code association table (**170**).

However, if at block **438** the formatted callee identifier in the callee identifier store **246** in FIG. **8** does not correspond to an access code in a record of the access code association table **170** illustrated in FIG. **10** that is associated with a callee identifier, then block **448** of FIG. **18**B causes the processor (**232**) to set the contents of the callee identifier store **246** of FIG. **8** to be the newly formatted callee identifier, i.e., a number compatible with the E.164 standard. Then, block **450** of FIG. **18**B directs the processor (**232**) to generate a routing message identifying a gateway to the public network usable by the call controller (**13**) to establish a "public system" call. In one embodiment, block **450** includes codes that, for example, direct the processor (**232**) to search a database of route or master list records and to search a database of supplier records to identify at least one supplier operable to supply a communications link for the call, and to load a routing message buffer with supplier information, time to live values, and timeout values. An example of an implementation of these steps is described with reference to blocks **410**, **412**, **560**, **562**, **563**, **564**, **566**, and **571** in FIGS. **8**B and **8**D in PCT Publication No. WO 2008/052340. Next, block **452** directs the processor **232** of FIG. **10** to send the routing message to the call controller **13** in FIG. **1**, and the process ends.

Calls to Subscribers within the Same Node

Referring back to FIG. **18**A, if at block **406**, the prefix of the username of the callee matches the node identifier associated with the gateway (**18**), then the call is on one domain, and block **454** directs the processor (**232**) to use the callee identifier in the callee identifier store **246** illustrated in FIG. **8** (which, at block **404**, was set to be a username of the callee) to locate and retrieve a dialing profile for the callee. The dialing profile may be of the type shown in FIG. **9**, for example. Block **456** of FIG. **18**A then directs the processor **232** of FIG. **8** to get call block, call forward, and voicemail records from the database **23** of FIG. **1**, based on the username identified in the callee dialing profile retrieved by the processor at block **454**. Exemplary call block, call forward, and voicemail records are described in PCT Publication No. WO 2008/052340.

Then block **458** directs the processor **232** of FIG. **8** to determine whether or not the caller identifier received in the RC request message matches a block pattern stored in the call block record associated with the callee and retrieved at block **454**. If the caller identifier matches a block pattern, then block **460** directs the processor to send a drop call or non-completion message to the call controller (**13**) and the process is ended. If the caller identifier does not match a block pattern associated with the callee, then block **462** directs the processor (**232**) to determine whether or not call forwarding is required, as described in PCT Publication No. WO 2008/052340.

If at block **462**, the call forwarding record for the callee indicates that no call forwarding is required, then the processor (**232**) is directed to block **464**, which directs the processor (**232**) to generate a routing message identifying an address on the private network, associated with the callee for a "private system" call. In one embodiment, block **464** includes codes that, for example, direct the processor (**232**) to store, in a routing message buffer, a username and domain of the callee, time to live values, and an IP address of the current node, to determine whether or not the user identified by the callee identifier has paid for voicemail service and if so, to store voicemail information in the routing message buffer. An example of an implementation of these steps is described with reference to blocks **609**, **620**, **640**, **642**, and **644** in FIGS. **8**A and **8**C in PCT Publication No. WO 2008/052340, which is incorporated herein by reference. Next, block **466** directs the processor **232** of FIG. **8** to cause the routing message to be sent to the call controller **13** in FIG. **1**, and the process ends.

But if at block **462**, the call forwarding record for the callee indicates that call forwarding is required, then block

468 directs the processor (232) to search a dialing profile table to find a dialing profile record as shown in FIG. 9, for the user identified by the destination number field of the call forward record, as illustrated in PCT Publication No. WO 2008/052340. The processor (232) is further directed to store the username and domain for that user and a time to live value in a routing message buffer, an example of which is described in PCT Publication No. WO 2008/052340. This process is repeated for each call forwarding record associated with the callee identified by the callee identifier store 246 in FIG. 8 to add to the routing message buffer all call forwarding usernames and domains associated with the callee.

Referring to FIGS. 1, 18A, and 18C, the routing message sent at one of blocks 412, 452, and 466 is received at the call controller 13 and the call controller interprets the receipt of the routing message as a request to establish a call. Referring to FIG. 15, the program memory 324 of the call controller 13 includes a routing to gateway routine depicted generally at 346.

Where a routing message received at the call controller 13 is of the type produced at block 464 shown in FIG. 18A, indicating that the callee is a system subscriber on the same node as the gateway (18) (such as a user of the VoIP telephone 36 illustrated in FIG. 1), the routing to gateway routine 346 may direct the microprocessor 322 to cause a message to be sent back through the IP network 26 shown in FIG. 1 to the VoIP telephone (36), using the IP address of the VoIP telephone (36) that is available from the callee username.

Alternatively, if the routing message received at the call controller 13 is of the type produced at block 410 shown in FIG. 18A, identifying a domain associated with another node in the system, the call controller 13 may send a SIP invite message along the high speed/high data throughput link 17 in communication with the other node. The other node may function as explained above and in PCT Publication No. WO 2008/052340, in response to receipt of a SIP invite message.

If the routing message received at the call controller 13 is of the type produced at block 450 shown in FIG. 18C, indicating that the callee is not a subscriber to the system (such as a user of the PSTN telephone 32 that is in communication with the IP network 26 through the gateway 34 as illustrated in FIG. 1), the call controller sends one or more SIP invite messages to the suppliers identified in the routing message to identify the IP address of a supplier that is able to carry the call, such as the IP address of the gateway 34 illustrated in the example of FIG. 1. A process for identifying the IP address of a supplier that is able to carry the call is given in PCT Publication No. WO 2008/052340, which is incorporated herein by reference. In some cases, the gateway of the supplier that is able to carry the call will be the gateway 18 illustrated in FIG. 1, that is, the same gateway through which the caller telephone (12) initiated the call. For simplicity, the following description assumes that the gateways 18 and 34 are distinct gateways. It will be understood that in some cases, they may be the same gateway, but in these cases, the following steps may still be applied.

Referring to FIG. 1, the IP address of the gateway 34 is sent in a message from the call controller 13 to the media relay 28, which responds with a message indicating an IP address to which the gateway 18 should send its audio/video traffic, and an IP address to which the gateway 34 should send its audio/video for the call. The call controller conveys the IP address at which the media relay 28 expects to receive audio/video from the gateways 18 and 34, to the gateways 18 and 34 in one or more messages. The gateway 18 replies to the call controller 13 with an IP address at which it would like to receive audio/video, and the call controller conveys that IP address to the media relay 28. The call may then be conducted between the caller and callee through the media relay 28 and the gateways 18 and 34.

If the call controller 13 receives a routing message of the type produced at block 464 shown in FIG. 18A, indicating that the callee is a system subscriber on the same node as the gateway (18) (such as a user of the VoIP telephone 36 illustrated in FIG. 1), and which has at least one call forwarding number and/or a voicemail number, the call controller attempts to establish a call to the callee VoIP telephone 36 by seeking from the callee telephone a message indicating an IP address to which the media relay 28 should send audio/video. If no such message is received from the callee telephone, no call is established. If no call is established within a pre-determined time, the call controller 13 attempts to establish a call with the next user identified in the call routing message in the same manner. This process is repeated until all call forwarding possibilities have been exhausted, in which case the call controller communicates with the voicemail server 19 identified in the routing message to obtain an IP address to which the media relay 28 should send audio/video and the remainder of the process mentioned above for establishing IP addresses at the media relay and the caller telephone is carried out to establish audio/video paths to allowing the caller to leave a voicemail message with the voicemail server.

When an audio/video path through the media relay 28 is established, a call timer maintained by the call controller 13 preferably logs the start date and time of the call and logs the call ID and an identification of the route (i.e., audio/video path IP address) for later use in billing.

Terminating the Call

Referring back to FIG. 1, in the event that the caller terminates a call, the gateway 18 sends a SIP bye message to the call controller 13. Similarly, in the event that the callee terminates the call, the gateway 34 or the VoIP telephone 36 of the callee sends a SIP bye message to the call controller 13. Exemplary SIP bye messages are described in PCT Publication No. WO 2008/052340. The SIP bye message is received at the call controller 13, and the call controller executes a process that involves decrementing the contents of the current number of concurrent calls field 222 dialing profile 200 of the caller as illustrated in FIG. 9, generating an RC call stop message (not shown), sending the RC call stop message to the routing controller 30, and sending a "bye" message to the party that did not terminate the call. An exemplary RC call stop message, and an example of how these steps may be implemented, are described in PCT Publication No. WO 2008/052340, which is incorporated herein by reference.

When the routing controller 30 receives the RC call stop message from the call controller 13, the routing controller executes an RC call stop message process that involves making various updates to subscriber, reseller, and supplier account records (not shown) following the call. Examples of subscriber, reseller, and supplier account records, and of updates to subscriber, reseller, and supplier account records, are described in PCT Publication No. WO 2008/052340, which is incorporated herein by reference.

While specific embodiments of the invention have been described and illustrated, such embodiments should be considered illustrative of the invention only and not as limiting the invention.

What is claimed is:

1. A method of establishing communications between a wireless device and a destination node of a communications network, the method comprising:

receiving from a user of the wireless device a destination node identifier associated with the destination node;

transmitting an access code request message to an access server, the access code request message including the destination node identifier and a location identifier identifying a geographical location of the wireless device;

receiving an access code reply message from the access server in response to the access code request message, the access code reply message including an access code based on the location identifier in the access code request message, the access code identifying a communications channel on a gateway through which communications between the wireless device and the destination node can be conducted, the access code being distinct from the destination node identifier; and

in response to receiving the access code reply message, causing the wireless device to use the access code received in the access code reply message to initiate communications from the wireless device to the destination node through the channel identified by the access code, wherein the access code is based on the location identifier transmitted in the access code request message and enables the communications to be established from the wireless device to the destination node through the channel on the gateway identified by the access code.

2. The method of claim **1**, wherein transmitting comprises transmitting the access code request message to the access server on a non-voice network.

3. The method of claim **1**, wherein transmitting comprises transmitting the access code request message as a Short Messaging Service (SMS) message.

4. The method of claim **1**, wherein transmitting comprises transmitting the access code request message on a voice network.

5. The method of claim **4**, wherein transmitting the access code request message on a voice network comprises transmitting the access code request message as a Short Messaging Service (SMS) message.

6. The method of claim **1**, wherein the location identifier comprises an Internet Protocol (IP) address of the wireless device in a wireless Internet Protocol (IP) network.

7. The method of claim **1**, wherein the location identifier comprises an identifier of a wireless voice signal station in wireless communication with the wireless device.

8. The method of claim **1**, wherein the location identifier comprises a user-configured identifier of a location associated with the wireless device.

9. The method of claim **1**, wherein receiving the access code reply message comprises receiving the access code reply message from the access server on a non-voice network.

10. The method of claim **1**, wherein receiving the access code reply message comprises receiving the access code reply message as a Short Messaging Service (SMS) message.

11. The method of claim **1**, wherein receiving comprises receiving the access code reply message on a voice network.

12. The method of claim **11**, wherein receiving the access code reply message on a voice network comprises receiving the access code reply message as a Short Messaging Service (SMS) message.

13. The method of claim **1**, wherein receiving the access code reply message comprises receiving, in the access code reply message, an access code temporarily associated with the destination node identifier.

14. The method of claim **1**, wherein receiving the access code reply message comprises receiving, in the access code reply message, a telephone number or an Internet Protocol (IP) address.

15. The method of claim **14**, wherein establishing communications between the wireless device and the destination node comprises engaging a routing controller to route the call on a public switched telephone network (PSTN) or an IP network to the destination node.

16. The method of claim **1** further comprising:

receiving at the access server, the access code request message from the wireless device;

causing the access server to communicate with a routing controller to obtain from the routing controller the access code, wherein the access code identifies a communications channel associated with the location identifier and wherein the access code is useable by the wireless device in a subsequent communication to cause the routing controller to establish a call to the destination node using the communications channel; and

causing the access server to transmit the access code reply message to the wireless device.

17. The method of claim **16**, wherein transmitting the access code reply message comprises transmitting the access code reply message as a Short Messaging Service (SMS) message.

18. The method of claim **16**, wherein transmitting the access code reply message comprises transmitting the access code reply message on a voice network.

19. The method of claim **18**, wherein transmitting the access code reply message on a voice network comprises transmitting the access code request message as a Short Messaging Service (SMS) message.

20. A wireless apparatus comprising:

means for receiving from a user of the wireless apparatus a destination node identifier associated with a destination node with which the user wishes to communicate;

means for transmitting an access code request message to an access server, the access code request message including the destination node identifier and a location identifier identifying a geographical location of the wireless apparatus;

means for receiving an access code reply message from the access server in response to the access code request message, the access code reply message including an access code based on the location identifier in the access code request message, the access code identifying a communications channel on a gateway through which communications between the wireless apparatus and the destination node can be conducted, the access code being distinct from the destination node identifier; and

means for causing the wireless apparatus to establish communications with the destination node through the communications channel identified by the access code in the access code reply message, the access code being based on the location identifier transmitted in the access code request message.

21. The apparatus of claim **20**, wherein the means for transmitting comprises a non-voice network interface for transmitting the access code request message to the access server on a non-voice network.

22. The apparatus of claim 20, wherein the means for transmitting includes means for transmitting the access code request message as a Short Messaging Service (SMS) message.

23. The apparatus of claim 20, wherein the means for transmitting comprises means for transmitting the access code request message on a voice network.

24. The apparatus of claim 23, wherein the means for transmitting the access code request message on a voice network comprises means for transmitting the access code request message as a Short Messaging Service (SMS) message.

25. The apparatus of claim 20, wherein the location identifier comprises an Internet Protocol (IP) address of the wireless apparatus in a wireless IP network.

26. The apparatus of claim 20, wherein the location identifier comprises an identifier of a wireless voice signal station in wireless communication with the wireless apparatus.

27. The apparatus of claim 20, wherein the location identifier comprises a user-configured identifier of a location associated with the wireless apparatus.

28. The apparatus of claim 20, wherein the means for receiving an access code reply message comprises a non-voice network interface for receiving the access code reply message on a non-voice network.

29. The apparatus of claim 20, wherein the means for receiving the access code request message comprises means for receiving the access code request message as a Short Messaging Service (SMS) message.

30. The apparatus of claim 20, wherein the means for receiving the access code request message comprises means for receiving the access code request message on a voice network.

31. The apparatus of claim 30, wherein the means for receiving the access code request message on a voice network comprises means for receiving the access code request message as a Short Messaging Service (SMS) message.

32. The apparatus of claim 20, wherein the access code includes a telephone number or an IP address.

33. The wireless apparatus of claim 20, wherein the means for causing the wireless apparatus to establish communications comprises a mobile telephone network interface.

34. A system for enabling roaming by a wireless apparatus, the system comprising the wireless apparatus of claim 20 and further comprising:

a routing controller;

the access server, wherein the access server comprises:

means for receiving from the wireless apparatus the access code request message;

means for communicating with the routing controller to obtain from the routing controller the access code wherein the access code identifies a communications channel associated with the location identifier and wherein the access code is useable by the wireless apparatus to cause the routing controller to establish a call to the destination node using the communications channel; and

means for transmitting the access code reply message including the access code to the wireless apparatus.

35. The system of claim 34, wherein the means for transmitting the access code reply message comprises means for transmitting the access code reply message as a Short Messaging Service (SMS) message.

36. The system of claim 34, wherein the means for transmitting the access code reply message comprises means for transmitting the access code reply message on a voice network.

37. The system of claim 36, wherein the means for transmitting the access code reply message on a voice network comprises means for transmitting the access code request message as a Short Messaging Service (SMS) message.

38. A wireless apparatus comprising:

a processor circuit comprising at least one processor;

a network interface in communication with the processor circuit; and

a non-transitory computer readable medium having computer executable codes stored thereon for directing the processor circuit to:

receive from a user of the wireless apparatus a destination node identifier associated with a destination node with which the user wishes to communicate;

transmit an access code request message to an access server, the access code request message including the destination node identifier and a location identifier identifying a geographical location of the wireless apparatus;

receive an access code reply message from the access server in response to the access code request message, the access code reply message including an access code based on the location identifier in the access code request message, the access code identifying a communications channel on a gateway through which communications between the wireless apparatus and the destination node can be conducted, the access code being distinct from the destination node identifier; and

initiate communications from the wireless apparatus, via the network interface, using the access code based on the location identifier, to establish communications between the wireless apparatus and the destination node through the communications channel identified by the access code.

39. The apparatus of claim 38, wherein the network interface comprises a non-voice network interface, and wherein the codes for directing the processor circuit to cause the access code request message to be transmitted include codes for directing the processor circuit to cause the access code request message to be transmitted to the access server using the non-voice network interface on a non-voice network.

40. The apparatus of claim 38, wherein the codes for directing the processor circuit to cause an access code to be transmitted to the access code server include codes for directing the processor circuit to cause the access code request message to be transmitted as a Short Messaging Service (SMS) message.

41. The apparatus of claim 38, wherein the network interface comprises a voice network interface and wherein the codes for directing the processor circuit to cause an access code to be transmitted to the access code server include codes for directing the processor circuit to cause the access code request message to be transmitted on a voice network.

42. The apparatus of claim 41, wherein the codes for directing the processor circuit to cause an access code to be transmitted to the access code server include codes for directing the processor circuit to cause the access code request message to be transmitted as a Short Messaging Service (SMS) message on the voice network.

43. The wireless apparatus of claim 38, wherein the location identifier comprises an Internet Protocol (IP) address of the wireless apparatus in a wireless IP network.

44. The wireless apparatus of claim 38, wherein the location identifier comprises an identifier of a wireless voice signal station in wireless communication with the wireless apparatus.

45. The wireless apparatus of claim 38, wherein the location identifier comprises a user-configured identifier of a location associated with the wireless apparatus.

46. The wireless apparatus of claim 38, wherein the network interface comprises a non-voice network interface, and wherein the codes for directing the processor circuit to receive an access code reply message include codes for directing the processor circuit to cause the access code reply message to be received from the access server using the non-voice network interface on a non-voice network.

47. The wireless apparatus of claim 38, wherein the access code includes a telephone number or an IP address.

48. The wireless apparatus of claim 38, wherein the network interface comprises a mobile telephone network interface, and wherein the codes for directing the processor circuit to establish communications between the wireless apparatus and the destination node to include codes for directing the processor circuit to cause a call to be initiated using the mobile telephone network interface on a mobile telephone network.

49. A system for enabling roaming by a wireless apparatus, the system comprising the wireless apparatus of claim 38 and further comprising:

a routing controller; and

an access server comprising a processor circuit and a computer readable medium in communication with the processor circuit, the computer readable medium encoded with codes for directing the processor circuit of the access server to:

receive the access code request message from the wireless apparatus;

communicate with the routing controller to obtain from the routing controller the access code wherein the access code identifies a communications channel associated with the location identifier and wherein the access code is useable by the wireless apparatus to cause the routing controller to establish a call to the destination node using the communications channel; and

transmit the access code reply message to the wireless apparatus.

50. A non-transitory computer readable medium having stored thereon computer executable codes for directing a processor circuit of a wireless device to establish communications with a destination node on a network, the codes comprising codes for directing the processor circuit to:

cause the wireless device to receive from a user of the wireless device a destination node identifier associated with the destination node;

cause the wireless device to transmit an access code request message to an access server, the access code request message including the destination node identifier and a location identifier identifying a geographical location of the wireless device;

cause the wireless device to receive an access code reply message comprising an access code identifying an Internet Protocol (IP) address based on the location identifier in the access code request message, the access code representing a communications channel of a network element in the network through which communications between the wireless device and the destination node can be conducted, the communications channel being associated with the geographical location of the wireless device, the access code being distinct from the destination node identifier; and

cause the wireless device to use the access code comprising the Internet Protocol (IP) address based on the location identifier to establish communications between the wireless device and the destination node through the communications channel of the network element identified by the access code.

51. A method for enabling a wireless device to establish communications with a destination node, the method comprising:

receiving from the wireless device an access code request message including a destination node identifier associated with the destination node and a location identifier identifying a geographical location of the wireless device;

in response to receiving the access code request message, causing a routing controller to produce an access code identifying a communications channel on a gateway through which communications between the wireless device and the destination node can be conducted, the access code being based on the location identifier of the access code request message received from the wireless device, wherein the access code is useable by the wireless device to initiate communications with the destination node through the communications channel; and

transmitting, to the wireless device, an access code reply message including the access code based on the location identifier, to cause the wireless device to use the access code to initiate communications with the destination node through the communications channel.

52. The method of claim 51, wherein receiving comprises receiving the access code request message on a non-voice network.

53. The method of claim 51, wherein receiving the access code request message comprises receiving the access code request message as a Short Messaging Service (SMS) message.

54. The method of claim 51, wherein receiving comprises receiving the access code request message on a voice network.

55. The method of claim 54, wherein receiving the access code request message on a voice network comprises receiving the access code request message as a Short Messaging Service (SMS) message.

56. The method of claim 51, wherein the routing controller is operably configured to route a call between the wireless device and the destination node when the wireless device uses the access code to establish communications between the wireless device and the destination node.

57. The method of claim 51, wherein causing the routing controller to produce the access code comprises causing the access code to be selected from a pool of access codes.

58. The method of claim 57 further comprising determining from the location identifier a local calling area associated with the wireless device and causing the access server to select an access code associated with a calling area matching the local calling area associated with the wireless device.

59. The method of claim 57, further comprising accessing a location field of a dialing profile associated with the wireless device when a local calling area cannot be determined from the location identifier and determining a local calling area associated with the wireless device from the

contents of the location field and selecting an access code associated with a calling area matching the local calling area associated with the wireless device.

60. The method of claim **51**, wherein the location identifier comprises an Internet Protocol (IP) address of the wireless device in a wireless IP network.

61. The method of claim **51**, wherein the location identifier comprises an identifier of a wireless voice signal station in wireless communication with the wireless device.

62. The method of claim **51**, wherein the location identifier comprises a user-configured identifier of a location associated with the wireless device.

63. The method of claim **57**, wherein at least one of the access codes in the pool of access codes identifies an IP network address as a possible communications channel through which the communications can be conducted.

64. The method of claim **51**, wherein the access code identifies an IP network address as a possible communications channel through which the communications can be conducted, the method further comprising enabling communications between the wireless device and the destination node to be established through an IP network in response to a call received at the IP network address from the wireless device using the access code identifying the IP network address.

65. The method of claim **57**, wherein at least one of the access codes identifies a telephone number as a possible communications channel through which the communications can be conducted.

66. The method of claim **65**, further comprising enabling communications between the wireless device and the destination node to be established through a public switched telephone network (PSTN) in response to a call received at the telephone number from the wireless device using the access code identifying the telephone number.

67. The method of claim **51**, wherein the access code request message includes a caller identifier and wherein the method further comprises associating the caller identifier included in the access code request message with the access code produced by the routing controller.

68. The method of claim **64**, further comprising enabling the routing controller to facilitate communications in response to use of the access code by the wireless device only if the caller identifier associated with the access code used by the wireless device to establish communications with the destination node identifies the wireless device.

69. The method of claim **67**, further comprising associating the destination node identifier included in the access code request message with the access code produced by the routing controller.

70. The method of claim **69**, wherein the associating the caller identifier and the destination node identifier with the selected access code occurs only when:

a) the access code is not already associated with a destination node identifier; or

b) the access code is already associated with another destination node identifier, and a timeout value associated with the another destination node identifier has expired.

71. The method of claim **51**, further comprising causing a timestamp to be associated with the access code, for use in determining when the usability of the access code to initiate a call to the destination node will expire, and causing the timestamp to be included in the access code reply message transmitted to the wireless device.

72. The method of claim **71**, further comprising causing communications to be permitted between the wireless device and the destination node when the wireless device seeks to establish a call to the destination node using the access code transmitted in the access code reply message when the timestamp associated with the access code indicates the usability of the access code has not expired, and causing the communications to be prevented when the timestamp indicates the usability of the access code has expired.

73. The method of claim **51**, wherein transmitting comprises transmitting the access code reply message on a non-voice network.

74. The method of claim **51**, wherein transmitting the access code reply message comprises transmitting the access code reply message as a Short Messaging Service (SMS) message.

75. The method of claim **51**, wherein transmitting comprises transmitting the access code reply message on a voice network.

76. The method of claim **75**, wherein transmitting the access code reply message on a voice network comprises transmitting the access code reply message as a Short Messaging Service (SMS) message.

77. An apparatus for enabling a wireless device to establish communications with a destination node, the apparatus comprising:

means for receiving from the wireless device an access code request message including a destination node identifier associated with the destination node and a location identifier identifying a geographical location of the wireless device;

means for causing a routing controller to produce an access code identifying a communications channel on a gateway through which communications between the wireless device and the destination node can be conducted, in response to receiving the access code request message, such that the access code is produced based on the location identifier of the access code request message received from the wireless device and such that the access code is useable by the wireless device to initiate communications with the destination node through the communications channel; and

means for transmitting an access code reply message including the access code to the wireless device, wherein the access code in the access code reply message is based on the location identifier and is used by the wireless device to initiate communications with the destination node through the communications channel on the gateway.

78. The apparatus of claim **77**, wherein the means for receiving comprises a non-voice network interface for receiving the access code request message on a non-voice network.

79. The apparatus of claim **77**, wherein the means for receiving the access code request message comprises means for receiving the access code request message as a Short Messaging Service (SMS) message.

80. The apparatus of claim **77**, wherein the means for receiving comprises means for receiving the access code request message on a voice network.

81. The apparatus of claim **80**, wherein the means for receiving the access code request message on a voice network comprises means for receiving the access code request message as a Short Messaging Service (SMS) message.

82. The apparatus of claim **77**, further comprising the routing controller and wherein routing controller is operably configured to route a call between the wireless device and the destination node.

83. The apparatus of claim 82, wherein the routing controller is operably configured to select the access code from a pool of access codes.

84. The apparatus of claim 83, wherein the routing controller is operably configured to determine a local calling area associated with the wireless device from the location identifier and to select an access code associated with a calling area matching the local calling area associated with the wireless device.

85. The apparatus of claim 83, further comprising:

a dialing profile associated with the wireless device, the dialing profile including a location field; and

wherein the routing controller is operably configured to determine a local calling area associated with the wireless device from the contents of the location field and to select an access code associated with a calling area matching the local calling area associated with the wireless device, when a local calling area associated with the wireless device cannot be determined from the location identifier.

86. The apparatus of claim 77, wherein the location identifier includes an Internet Protocol (IP) address of the wireless device in a wireless IP network.

87. The apparatus of claim 77, wherein the location identifier includes an identifier of a wireless voice signal station in wireless communication with the wireless device.

88. The apparatus of claim 77, wherein the location identifier includes a user-configured identifier of a location associated with the wireless device.

89. The apparatus of claim 83, wherein at least one of the access codes in the pool of access codes identifies an IP network address as a possible communications channel through which the communications can be conducted.

90. The apparatus of claim 77, wherein the access code identifies an IP network address as a possible communications channel through which the communications can be conducted, and wherein the routing controller is operably configured to enable communications between the wireless device and the destination node to be established through an IP network in response to a call received at the IP network address from the wireless device using the access code identifying the IP network address.

91. The apparatus of claim 83, wherein at least one of the access codes in the pool of access codes identifies a telephone number as a possible communications channel through which the communications can be conducted.

92. The apparatus of claim 91, wherein the routing controller is operably configured to enable communications between the wireless device and the destination node to be established through a public switched telephone network (PSTN) in response to a call received at the telephone number from the wireless device using the access code identifying the telephone number.

93. The apparatus of claim 83, wherein the access code request message includes a caller identifier and wherein the routing controller is operably configured to associate the caller identifier with the selected access code.

94. The apparatus of claim 93, wherein the routing controller is operably configured to facilitate communications between the wireless device and the destination node in response to use of the access code by the wireless device only if the caller identifier associated with the access code used by the wireless device to establish communications with the destination node identifies the wireless device.

95. The apparatus of claim 93, wherein the routing controller is operably configured to associate the destination node identifier included in the access code request message with the selected access code.

96. The apparatus of claim 95, wherein the routing controller is operably configured to associate the caller identifier and the destination node identifier with the selected access code only when:

a) the access code is not already associated with a destination node identifier; or

b) the access code is already associated with another destination node identifier, and a timeout value associated with the another destination node identifier has expired.

97. The apparatus of claim 82, wherein the routing controller is operably configured to associate a timestamp with the access code, for use in determining when the usability of the access code to initiate a call to the destination node will expire, and to cause the timestamp to be included in the access code reply message transmitted to the wireless device.

98. The apparatus of claim 97, wherein the routing controller is operably configured to enable communications to be established between the wireless device and the destination node when the wireless device seeks to establish a call to the destination node using the access code transmitted in the access code reply message when the timestamp associated with the access code indicates the usability of the access code has not expired and to prevent the communications from being established when the timestamp indicates the usability of the access code has expired.

99. The apparatus of claim 77, wherein the means for transmitting comprises a non-voice network interface for transmitting the access code reply message on a non-voice network.

100. The apparatus of claim 77, wherein the means for transmitting the access code reply message comprises means for transmitting the access code reply message as a Short Messaging Service (SMS) message.

101. The apparatus of claim 77, wherein the means for transmitting comprises means for transmitting the access code reply message on a voice network.

102. The apparatus of claim 101, wherein the means for transmitting the access code reply message on a voice network comprises means for transmitting the access code reply message as a Short Messaging Service (SMS) message.

103. An apparatus for enabling a wireless device to establish communications with a destination node, the apparatus comprising:

a processor circuit including at least one processor;

a network interface in communication with the processor circuit; and

a non-transitory computer readable medium having stored thereon computer executable codes for directing the at least one processor to:

receive from the wireless device an access code request message including a destination node identifier associated with the destination node and a location identifier identifying a geographical location of the wireless device;

cause a routing controller to produce an access code identifying a communications channel on a gateway through which communications between the wireless device and the destination node can be conducted, in response to receiving the access code request message, such that the access code is produced based on the location identifier of the access code request message received from the wireless device and such

that the access code is useable by the wireless device to initiate communications with the destination node through the communications channel; and

transmit an access code reply message including the access code to the wireless device, wherein the access code in the access code reply message is based on the location identifier and is used by the wireless device to initiate communications with the destination node through the communication channel.

104. The apparatus of claim **103**, wherein the network interface comprises a non-voice network interface, and wherein the codes for directing the processor circuit to receive include codes for directing the processor circuit to cause the access code request message to be received using the non-voice network interface on a non-voice network.

105. The apparatus of claim **103**, wherein the codes includes codes for directing the processor circuit to receive the access code request message as a Short Messaging Service (SMS) message.

106. The apparatus of claim **103**, wherein the codes include codes for directing the processor circuit to receive the access code request message on a voice network.

107. The apparatus of claim **106**, wherein the codes include codes for directing the processor circuit to receive the access code request message as a Short Messaging Service (SMS) message.

108. The apparatus of claim **103** further comprising the routing controller.

109. The apparatus of claim **108**, wherein the routing controller is operably configured to cause the access code to be selected from a pool of access codes, wherein none of the access codes in the pool of access codes identifies a respective telephone number.

110. The apparatus of claim **109**, wherein the routing controller is operably configured to determine from the location identifier a local calling area associated with the wireless device and to select an access code associated with a calling area matching the local calling area associated with the wireless device.

111. The apparatus of claim **109**, wherein the routing controller is operably configured to access a location field of a dialing profile associated with the wireless device when a local calling area cannot be determined from the contents of the location identifier and to determine a local calling area associated with the wireless device from the contents of the location field and to select an access code associated with a calling area matching the local calling area associated with the wireless device.

112. The apparatus of claim **103**, wherein the location identifier comprises an Internet Protocol (IP) address of the wireless device in a wireless IP network.

113. The apparatus of claim **103**, wherein the location identifier comprises an identifier of a wireless voice signal station in wireless communication with the wireless device.

114. The apparatus of claim **103**, wherein the location identifier comprises a user-configured identifier of a location associated with the wireless device.

115. The apparatus of claim **109**, wherein at least one of the access codes in the pool of access codes identifies an IP network address as a possible communications channel through which the communications can be conducted.

116. The apparatus of claim **103**, wherein the access code identifies an IP network address as a possible communications channel through which the communications can be conducted, and wherein the routing controller is operably configured to enable communications between the wireless device and the destination node to be established through an IP network in response to a call received at the IP network address from the wireless device using the access code identifying the IP network address.

117. The apparatus of claim **108**, wherein the routing controller is operably configured to cause the access code to be selected from a pool of access codes, and wherein at least one of the access codes in the pool of access codes identifies a telephone number as a possible communications channel through which the communications can be conducted.

118. The apparatus of claim **117**, wherein the routing controller is operably configured to enable communications between the wireless device and the destination node to be established through a public switched telephone network (PSTN) in response to a call received at the telephone number from the wireless device using the access code identifying the telephone number.

119. The apparatus of claim **108**, wherein the access code request message includes a caller identifier and wherein the routing controller is operably configured to associate the caller identifier included in the access code request message with an access code selected by the routing controller.

120. The apparatus of claim **119**, wherein the routing controller is operably configured to facilitate communications between the wireless device and the destination node in response to the access code used by the wireless device only if the caller identifier associated with the access code used by the wireless device to establish communications with the destination node identifies the wireless device.

121. The apparatus of claim **119**, wherein the routing controller is operably configured to associate the destination node identifier included in the access code request message with the selected access code.

122. The apparatus of claim **121**, wherein the routing controller is operably configured to associate the caller identifier and the destination node identifier with the selected access code only when:

a) the access code is not already associated with another destination node identifier; or

b) the access code is already associated with a destination node identifier, and a timeout value associated with the another destination node identifier has expired.

123. The apparatus of claim **122**, wherein the routing controller is operably configured to associate a timestamp with the access code, for use in determining when the usability of the access code to initiate a call to the destination node will expire, and to cause the timestamp to be included in the access code reply message.

124. The apparatus of claim **103**, wherein the routing controller is operably configured to enable communications to be established between the wireless device and the destination node when the wireless device seeks to establish a call to the destination node using the access code transmitted in the access code reply message when a timestamp associated with the access code indicates that usability of the access code has not expired and to prevent the communications from being established when the timestamp indicates that the usability of the access code has expired.

125. The apparatus of claim **103**, wherein the network interface comprises a non-voice network interface, and wherein codes for directing the processor circuit to transmit include codes for directing the processor circuit to cause the access code reply message to be transmitted using the non-voice network interface on a non-voice network.

126. The apparatus of claim **103**, wherein the codes include codes for directing the processor circuit to cause the

access code reply message to be transmitted as a Short Messaging Service (SMS) message.

127. The apparatus of claim **103**, wherein the codes include codes for directing the processor circuit to cause the access code reply message to be transmitted on a voice network.

128. The apparatus of claim **127**, wherein the codes include codes for directing the processor circuit to cause the access code reply message to be transmitted as a Short Messaging Service (SMS) message.

129. A non-transitory computer readable medium encoded with computer executable codes for directing a processor circuit of a wireless device to establish communications with a destination node, the codes comprising codes for directing the processor circuit to:

receive from the wireless device an access code request message including a destination node identifier associated with the destination node and a location identifier identifying a geographical location of the wireless device;

cause a routing controller to produce an access code comprising an Internet Protocol (IP) network address identifying a communications channel on a gateway through which communications between the wireless device and the destination node can be conducted, in response to receiving the access code request message, such that the access code is produced based on the location identifier of the access code request message received from the wireless device and such that the access code is useable by the wireless device to initiate communications with the destination node through the communications channel; and

transmit an access code reply message including the access code to the wireless device, wherein the Internet Protocol (IP) address of the access code is based on the location identifier and is used by the wireless device to initiate communications with the destination node through the communication channel on the gateway.

130. A method of operating an apparatus for enabling a wireless device to establish communications with a destination node, the method comprising:

receiving from the wireless device a request message including a destination node identifier associated with the destination node and a location identifier associated with a geographical location of the wireless device, wherein the location identifier comprises a first Internet Protocol (IP) address associated with the wireless device;

in response to receiving the request message, producing an access code identifying a second Internet Protocol (IP) address associated with an IP network communication device through which communications between the wireless device and the destination node can be conducted, wherein the access code is produced based on the location identifier received from the wireless device, wherein the access code is useable by the wireless device to initiate communications with the destination node through the IP network communication device; and

transmitting a reply message including the access code to the wireless device, wherein the second Internet Protocol (IP) address is based on the location identifier and is used by the wireless device to initiate communications with the destination node through a communication channel on the IP network communication device.

131. The method of claim **130** wherein the access code is produced based on the destination node identifier.

132. The method of claim **131** wherein the destination node identifier comprises a phone number associated with the destination node.

133. The method of claim **130** further comprising, if the destination node is a PSTN telephone on the public switched telephone network (PSTN), establishing communications from the wireless device to a communications supplier gateway operable to connect to the PSTN telephone via the public switched telephone network (PSTN).

134. The method of claim **51**, wherein causing the routing controller to produce the access code further comprises:

determining, from the location identifier, a current location of the wireless device; and

searching an access code association database table to identify an access code associated with the current location of the wireless device but not presently associated with communications to any destination node, to produce the access code transmitted in the access code reply message.

135. The method of claim **1** wherein the access code request message is transmitted from the wireless device via a WiFi network and the access code reply message is received by the wireless device via the WiFi network.

136. The method of claim **1**, wherein the destination node identifier and the location identifier are transmitted at the same time.

137. The method of claim **51**, wherein the access code is based on an area code corresponding to a location identified by the location identifier.

138. The method of claim **51**, wherein the access code reply message identifies an Internet Protocol (IP) network address of the communications channel through which the communications can be conducted, wherein the access code is useable by the wireless device to initiate the communications with the destination node through the communications channel.

139. The apparatus of claim **103**, wherein the access code reply message identifies an Internet Protocol (IP) network address associated with the communications channel through which the communications can be conducted, wherein the Internet Protocol (IP) network address is useable by the wireless device to initiate the communications with the destination node through the communications channel.

140. The method of claim **1**, further comprising:

(a) receiving, in the access code reply message, an Internet Protocol (IP) address; and

(b) establishing the communications between the wireless device and the destination node based on the Internet Protocol (IP) address received in the access code reply message.

141. The method of claim **1**, wherein the access code received in the access code reply message does not comprise a telephone number.

* * * * *